

# 16-Bit Original Microcontroller

CMOS

## F<sup>2</sup>MC-16LX MB90420G/425G Series

MB90423GA/423GB/423GC/F423GA/F423GB/F423GC/427GA/427GB/  
MB90427GC/428GA/428GB/428GC/F428GA/F428GB/F428GC/V420G

### ■ DESCRIPTIONS

The FUJITSU MB90420G/425G Series is a 16-bit general purpose high-capacity microcontroller designed for vehicle meter control applications etc.

The instruction set retains the same AT architecture as the FUJITSU original F<sup>2</sup>MC-8L and F<sup>2</sup>MC-16L series, with further refinements including high-level language instructions, expanded addressing mode, enhanced (signed) multiplier-divider computation and bit processing.

In addition, a 32-bit accumulator is built in to enable long word processing.


### ■ FEATURES

- 16-bit input capture (4 channels)  
Detects rising, falling, or both edges.  
16-bit capture register × 4  
Pin input edge detection latches the 16-bit free-run timer counter value, and generates an interrupt request.
- 16-bit reload timer (2 channels)  
16-bit reload timer operation (select toggle output or one-shot output)  
Event count function selection provided

*(Continued)*


### ■ PACKAGES

Plastic QFP, 100-pin

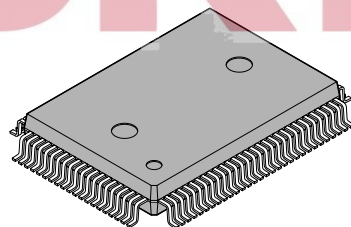

(FPT-100P-M06)

Plastic LQFP, 100-pin



(FPT-100P-M05)

# MB90420G/425G Series

- Clock timer (main clock)  
Operates directly from oscillator clock.  
Compensates for oscillator deviation  
Read/write enabled second/minute/hour register  
Signal interrupt
- 16-bit PPG (3 channels)  
Output pins (3) , external trigger input pin (1)  
Output clock frequencies :  $f_{CP}$ ,  $f_{CP}/2^2$ ,  $f_{CP}/2^4$ ,  $f_{CP}/2^6$
- Delay interrupt  
Generates interrupt for task switching.  
Interruptions to CPU can be generated/deleted by software setting.
- External interrupts (8 channels)  
8-channel independent operation  
Interrupt source setting available : “L” to “H” edge/ “H” to “L” edge/ “L” level/ “H” level.
- A/D converter  
10-bit or 8-bit resolution  $\times$  8 channels (input multiplexed)  
Conversion time : 6.13  $\mu$ s or less (at  $f_{CP} = 16$  MHz)  
External trigger startup available (P50/INT0/ADTG)  
Internal timer startup available (16-bit reload timer 1)
- UART (2 channels)  
Full duplex double buffer type  
Supports asynchronous/synchronous transfer (with start/stop bits)  
Internal timer can be selected as clock (16-bit reload timer 0)  
Asynchronous : 4808 bps, 5208 bps, 9615 bps, 10417 bps, 19230 bps, 38460 bps, 62500 bps, 500000 bps  
Synchronous : 500 Kbps, 1Mbps, 2Mbps (at  $f_{CP} = 16$  MHz)
- CAN interface \*1  
Conforms to CAN specifications version 2.0 Part A and B.  
Automatic resend in case of error.  
Automatic transfer in response to remote frame.  
16 prioritized message buffers for data and messages for data and ID  
Multiple message support  
Receiving filter has flexible configuration : All bit compare/all bit mask/two partial bit masks  
Supports up to 1 Mbps  
CAN WAKEUP function (connects RX internally to INT0)
- LCD controller/driver (1 channel)  
Segment driver and command driver with direct LCD panel (display) drive capability
- Low voltage/Program Looping detect reset \*2  
Automatic reset when low voltage is detected  
Program Looping detection function
- Stepping motor controller (4 channels)  
High current output for all channels  $\times$  4  
Synchronized 8/10-bit PWM for all channels  $\times$  2
- Sound generator  
8-bit PWM signal mixed with tone frequency from 8-bit reload counter.  
PWM frequencies : 62.5 kHz, 31.2 kHz, 15.6 kHz, 7.8 kHz (at  $f_{CP} = 16$  MHz)  
Tone frequencies : 1/2 PWM frequency, divided by (reload frequency +1)

(Continued)

(Continued)

- Input/output ports
  - Push-pull output and Schmitt trigger input
  - Programmable in bit units for input/output or peripheral signals.
- Flash memory
  - Supports automatic programming, Embedded Algorithm™, write/erase/erase pause/erase resume instructions
  - Flag indicates algorithm completion
  - Minato Electronics flash writer
  - Boot block configuration
  - Erasable by blocks
  - Block protection by external programming voltage

\*1 : MB90420G series has 2 channels built-in, MB90425G series has 1 channel built-in

\*2 : Built-in to MB90420GA/420GB/425GA/425GB series only. Not built-in to MB90420GC/425GC series.

Embedded Algorithm is a registered trademark of Advanced Micro Devices Inc.



**SKYTECH**  
ELECTRONIC

# MB90420G/425G Series

## ■ PRODUCT LINEUP

### ● MB90420G Series

Part number	MB90F423GA	MB90F423GB	MB90F423GC	*1 MB90423GA	*1 MB90423GB	*1 MB90423GC	MB90V420G
Parameter							
Configuration	Flash ROM model			Mask ROM model			Evaluation model
CPU	F <sup>2</sup> MC-16LX CPU						
Clock	1 system	2 systems		1 system	2 systems		2 systems
System clock	On-chip PLL clock multiplier type (× 1, × 2, × 3, × 4, 1/2 when PLL stopped) Minimum instruction execution time 62.5 ns (with 4 MHz oscillator × 4)						
ROM	Flash ROM 128 KB			Mask ROM 128 KB			External
RAM	6 KB			6 KB			6 KB
CAN interface	2 channels						
Low voltage/ CPU operation detection reset	Yes	No		Yes	No		No
Packages	QFP100, LQFP100						PGA-256
Emulator dedicated power supply*2	—						No

\*1 : Under development

\*2 : When used with emulation pod MB2145-507, use DIP switch S2 setting. For details see the MB2145-50 Hardware Manual (2.7 "Emulator Dedicated Power Supply Pin").

**SKYTECH**  
ELECTRONIC

# MB90420G/425G Series

## • MB90425G Series

Part number	MB90F428GA	MB90F428GB	MB90F428GC
Configuration	Flash ROM model		
CPU	F <sup>2</sup> MC-16LX CPU		
Clock	1 system	2 systems	
System clock	On-chip PLL clock multiplier type (× 1, × 2, × 3, × 4, 1/2 when PLL stopped) Minimum instruction execution time 62.5 ns (with 4 MHz oscillator × 4)		
ROM	Flash ROM 128 KB		
RAM	6 KB		
CAN interface	1 channel		
Low voltage/ CPU operation detection reset	Yes		No
Packages	QFP100, LQFP100		
Emulator dedicated power supply	—		

Part number	MB90427GA*	MB90427GB*	MB90427GC*	MB90428GA*	MB90428GB*	MB90428GC*
Configuration	Mask ROM model					
CPU	F <sup>2</sup> MC-16LX CPU					
Clock	1 system	2 systems		1 system	2 systems	
System clock	On-chip PLL clock multiplier type (× 1, × 2, × 3, × 4, 1/2 when PLL stopped) Minimum instruction execution time 62.5 ns (with 4 MHz oscillator × 4)					
ROM	Mask ROM 64 KB			Mask ROM 128 KB		
RAM	4 KB			6 KB		
CAN interface	1 channel					
Low voltage/ CPU operation detection reset	Yes		No	Yes		No
Packages	QFP100, LQFP100					
Emulator dedicated power supply	—					

\* : Under development


Note : MB90V420G can be used as evaluation model for MB90420G/425G series.



# MB90420G/425G Series


## ■ PIN ASSIGNMENTS

● QFP 100

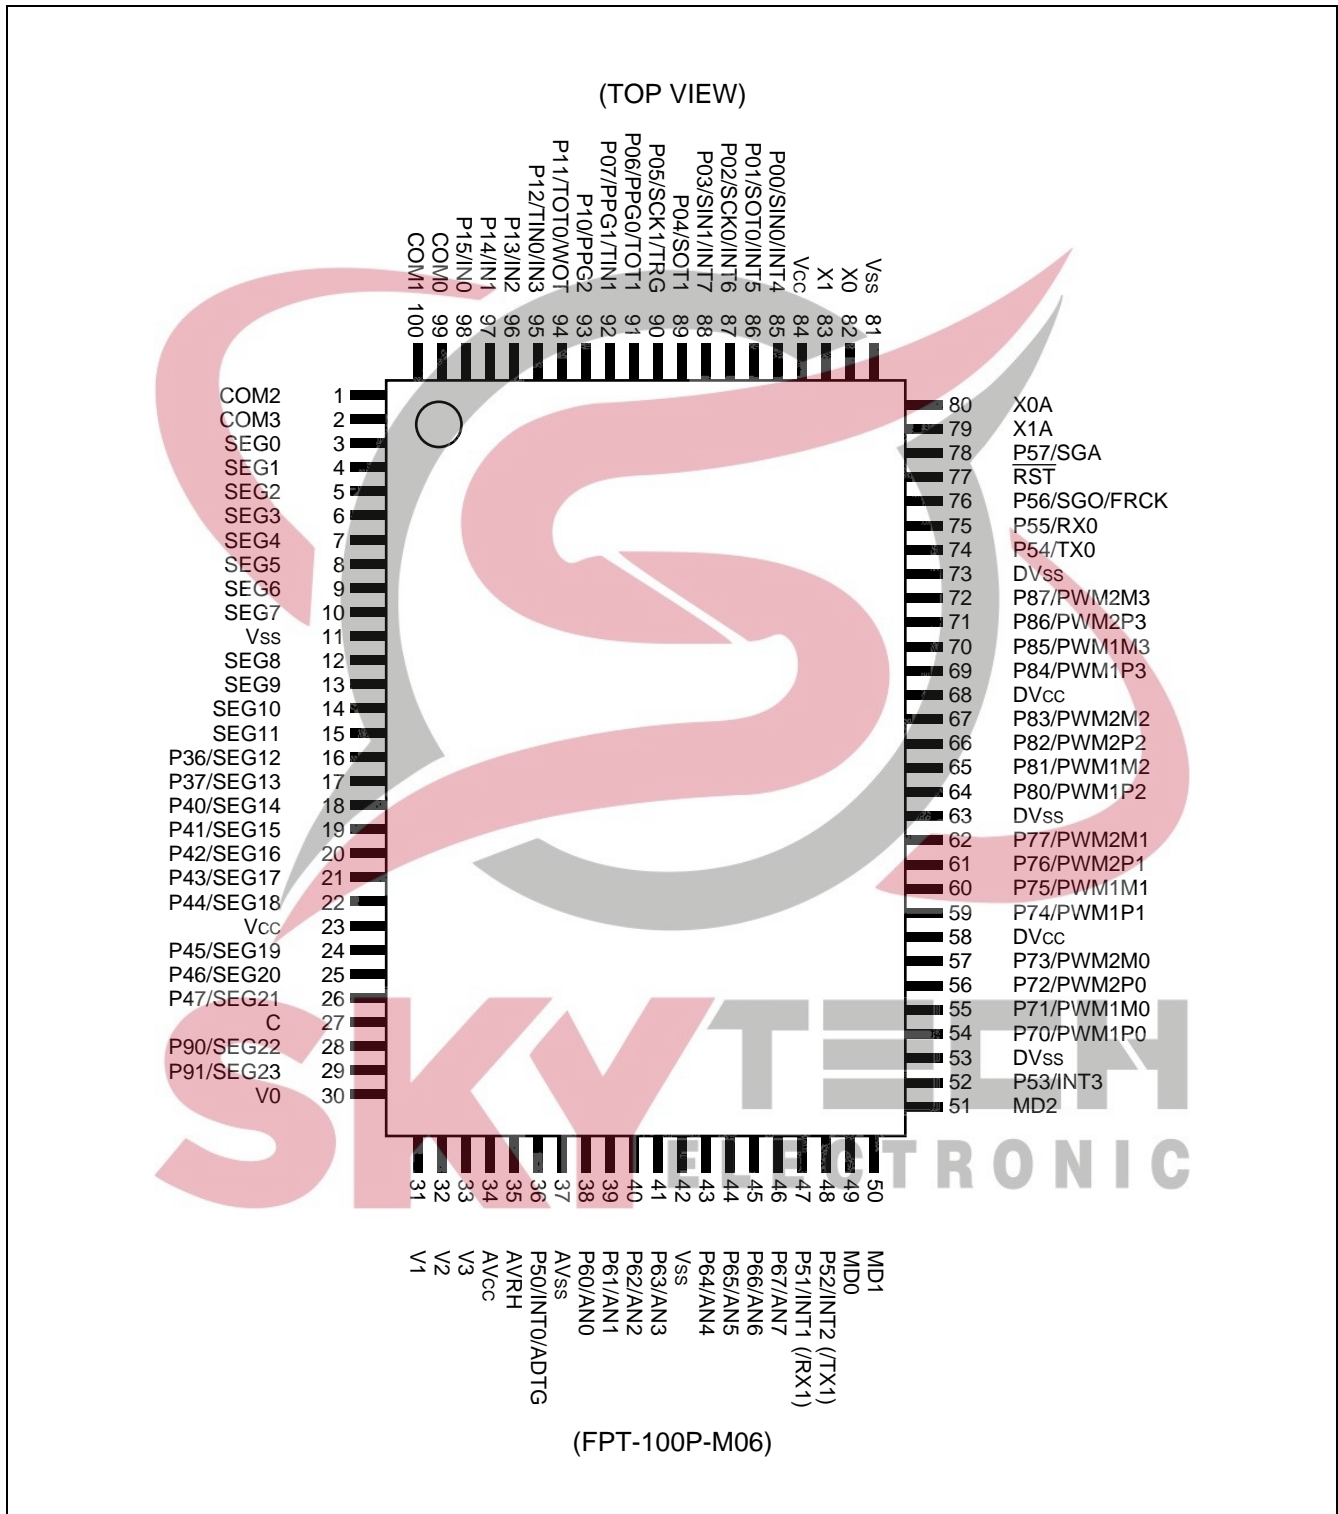

# MB90420G/425G Series

• LQFP 100

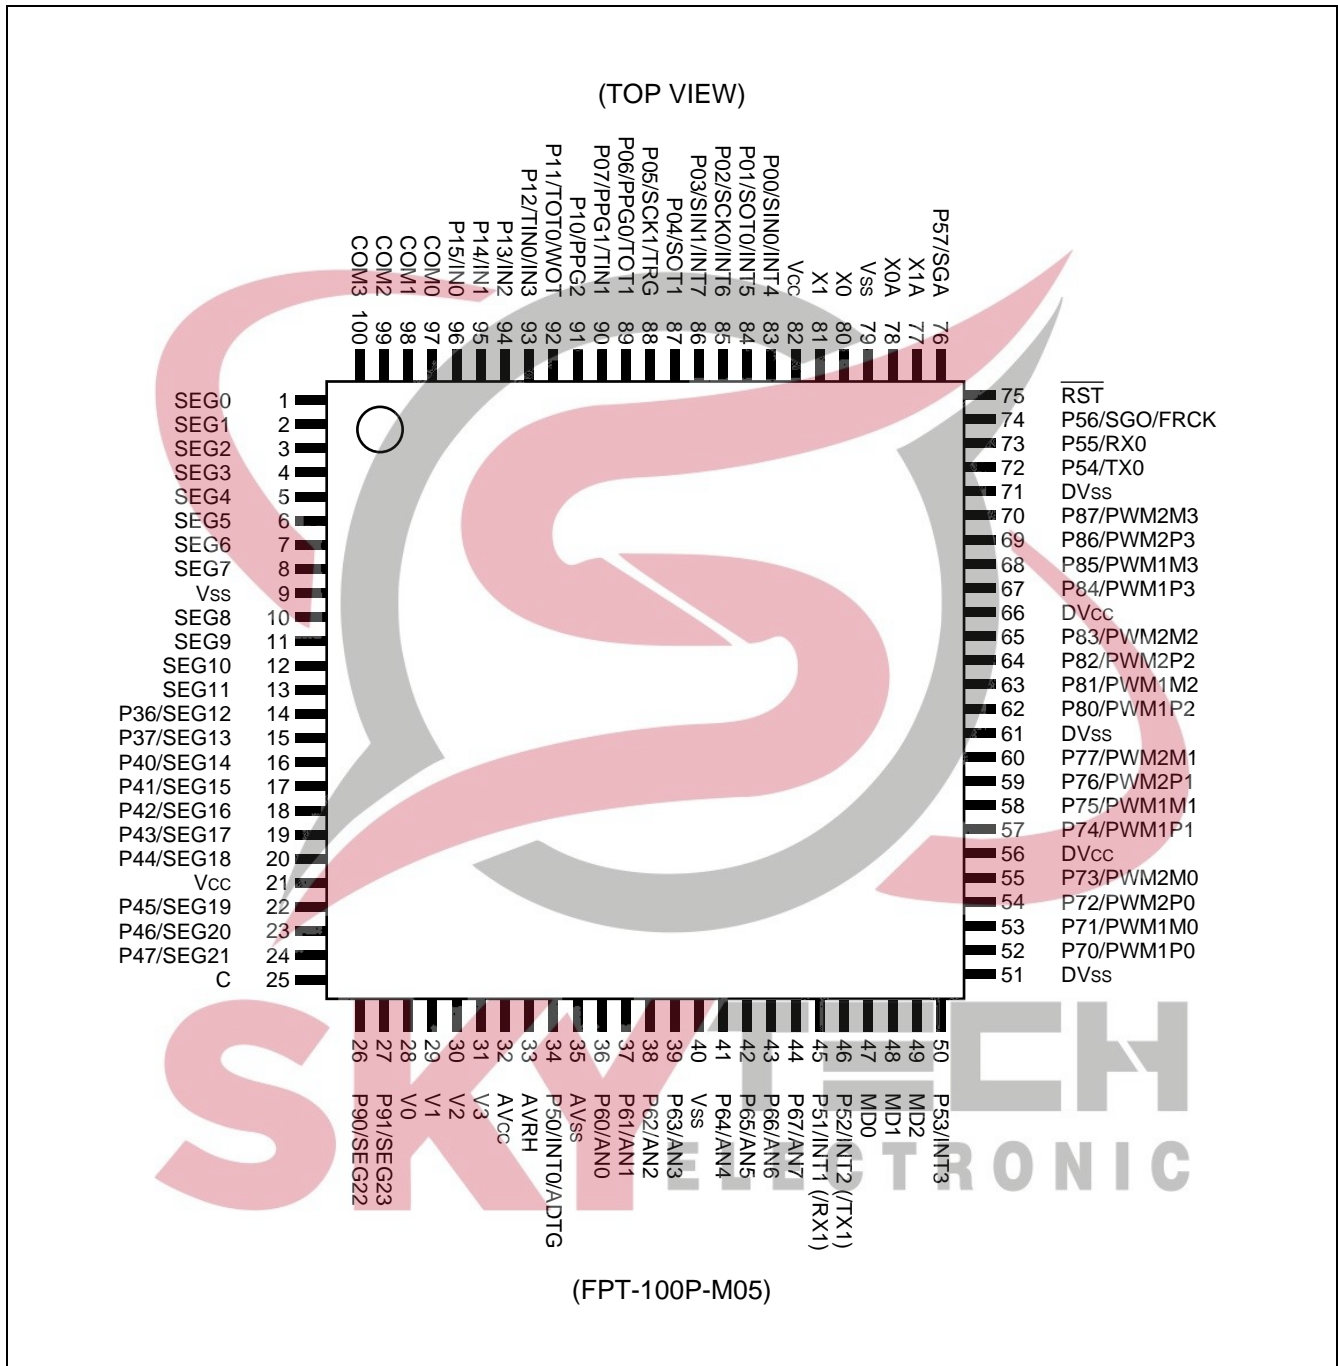

# MB90420G/425G Series

## ■ PIN DESCRIPTIONS

Pin no.		Symbol	Circuit type	Description
LQFP	QFP			
80	82	X0	A	High speed oscillator input pin.
81	83	X1		High speed oscillator output pin.
78	80	X0A	A	Low speed oscillator input pin. If no oscillator is connected, apply pull-down processing.
77	79	X1A		Low speed oscillator output pin. If no oscillator is connected, leave open.
75	77	$\overline{\text{RST}}$	B	Reset input pin.
83	85	P00	G	General purpose input/output port.
		SIN0		UART ch.0 serial data input pin.
		INT4		INT4 external interrupt input pin.
84	86	P01	G	General purpose input/output port.
		SOT0		UART ch.0 serial data output pin.
		INT5		INT5 external interrupt input pin.
85	87	P02	G	General purpose input/output port.
		SCK0		UART ch.0 serial clock input/output pin.
		INT6		INT6 external interrupt input pin.
86	88	P03	G	General purpose input/output port.
		SIN1		UART ch.1 serial data input pin.
		INT7		INT7 external interrupt input pin.
87	89	P04	G	General purpose input/output port.
		SOT1		UART ch.1 serial data output pin.
88	90	P05	G	General purpose input/output port.
		SCK1		UART ch.1 serial clock input/output pin.
		TRG		16-bit PPG ch.0-2 external trigger input pin.
89	91	P06	G	General purpose input/output port.
		PPG0		16-bit PPG ch.0 output pin.
		TOT1		16-bit reload timer ch.1 TOT output pin.
90	92	P07	G	General purpose input/output port.
		PPG1		16-bit PPG ch.1 output pin.
		TIN1		16-bit reload timer ch.1 TIN output pin.
91	93	P10	G	General purpose input/output port.
		PPG2		16-bit PPG ch.2 output pin.

(Continued)



# MB90420G/425G Series

Pin no.		Symbol	Circuit type	Description
LQFP	QFP			
92	94	P11	G	General purpose input/output port.
		TOT0		16-bit reload timer ch.0 TOT output pin.
		WOT		Real-time clock timer WOT output pin.
93	95	P12	G	General purpose input/output port.
		TIN0		16-bit reload timer ch.0 TIN output pin.
		IN3		Input capture ch.3 trigger input pin.
94 to 96	96 to 98	P13 to P15	G	General purpose input/output ports.
		IN2 to IN0		Input capture ch.0-2 trigger input pins.
97 to 100	99 to 100, 1 to 2	COM0 to COM3	I	LCD controller/driver common output pins.
1 to 8, 10 to 13	3 to 10, 12 to 15	SEG0 to SEG11	I	LCD controller/driver segment output pins.
14 to 15	16 to 17	P36 to P37	E	General purpose output ports.
		SEG12 to SEG13		LCD controller/driver segment output pins.
16 to 20, 22 to 24	18 to 22, 24 to 26	P40 to P47	E	General purpose input output ports.
		SEG14 to SEG21		LCD controller/driver segment output pins.
26 to 27	28 to 29	P90 to P91	E	General purpose input output ports.
		SEG22 to SEG23		LCD controller/driver segment output pins.
34	36	P50	G	General purpose input output ports.
		INT0		INT0 external interrupt input pin.
		ADTG		A/D converter external trigger input pin.
36 to 39, 41 to 44	38 to 41, 43 to 46	P60 to P67	F	General purpose input output ports.
		AN0 to AN7		A/D converter input pins.
45	47	P51	G	General purpose input output port.
		INT1		INT1 external interrupt input pin.
		(RX1 *)		CAN interface 1 RX input pin.
46	48	P52	G	General purpose input output port.
		INT2		INT2 external interrupt input pin.
		(TX1 *)		CAN interface 1 TX output pin.
50	52	P53	G	General purpose input output port.
		INT3		INT3 external interrupt input pin.

\* : MB90420G series only.

(Continued)

# MB90420G/425G Series

Pin no.		Symbol	Circuit type	Description
LQFP	QFP			
52 to 55	54 to 57	P70 to P73	H	General purpose input output ports.
		PWM1P0 PWM1M0 PWM2P0 PWM2M0		Stepping motor controller ch.0 output pins.
57 to 60	59 to 62	P74 to P77	H	General purpose input output ports.
		PWM1P1 PWM1M1 PWM2P1 PWM2M1		Stepping motor controller ch.1 output pins.
62 to 65	64 to 67	P80 to P83	H	General purpose input output ports.
		PWM1P2 PWM1M2 PWM2P2 PWM2M2		Stepping motor controller ch.2 output pins.
67 to 70	69 to 72	P84 to P87	H	General purpose input output ports.
		PWM1P3 PWM1M3 PWM2P3 PWM2M3		Stepping motor controller ch.3 output pins.
72	74	P54	G	General purpose input output port.
		TX0		CAN interface 0 TX output pin.
73	75	P55	G	General purpose output port.
		RX0		CAN interface 0 RX input pin.
74	76	P56	G	General purpose input output port.
		SG0		Sound generator SG0 output pin.
		FRCK		Free-run timer clock input pin.
76	78	P57	G	General purpose input output port.
		SGA		Sound generator SGA output pin.
28 to 31	30 to 33	V0 to V3	—	LCD controller /driver reference power supply pins.
56, 66	58, 68	DV <sub>cc</sub>	—	High current output buffer with dedicated power supply input pins (pin numbers 54-57, 59-62, 64-67, 69-72) .
51, 61, 71	53, 63, 73	DV <sub>ss</sub>	—	High current output buffer with dedicated power supply GND pins (pin numbers 54-57, 59-62, 64-67, 69-72) .
32	34	AV <sub>cc</sub>	—	A/D converter dedicated power supply input pin.
35	37	AV <sub>ss</sub>	—	A/D converter dedicated GND supply pin.
33	35	AVRH	—	A/D converter Vref + input pin. Vref – AV <sub>ss</sub> .

(Continued)

# MB90420G/425G Series

(Continued)

Pin no.		Symbol	Circuit type	Description
LQFP	QFP			
47 48	49 50	MD0 MD1	C	Test mode input pins. Connect to V <sub>cc</sub> .
49	51	MD2	C/D *	Text mode input pin. Connect to V <sub>ss</sub> .
25	27	C	—	External capacitor pin. Connect an 0.1 μF capacitor between this pin and V <sub>ss</sub> .
21, 82	23, 84	V <sub>cc</sub>	—	Power supply input pins.
9, 40, 79	11, 42, 81	V <sub>ss</sub>	—	GND power supply pins.

\* : Type C in the flash ROM models, type D in the mask ROM models.



# MB90420G/425G Series





## I/O CIRCUIT TYPE

Type	Circuit	Remarks
A		<ul style="list-style-type: none"> <li>Oscillation feedback resistance : approx. 1 M<math>\Omega</math> (X0, X1 : MAIN)</li> <li>Oscillation feedback resistance : approx. 10 M<math>\Omega</math> (X0A, X1A : SUB)</li> </ul>
B		<ul style="list-style-type: none"> <li>Pull-up resistance attached : approx. 50 k<math>\Omega</math>, hysteresis input</li> </ul>
C		<ul style="list-style-type: none"> <li>Hysteresis input</li> </ul>
D		<ul style="list-style-type: none"> <li>Pull-down resistance attached : approx. 50 k<math>\Omega</math>, hysteresis input</li> </ul>
E		<ul style="list-style-type: none"> <li>CMOS output</li> <li>LCDC output</li> <li>Hysteresis input</li> </ul>

(Continued)

# MB90420G/425G Series

(Continued)

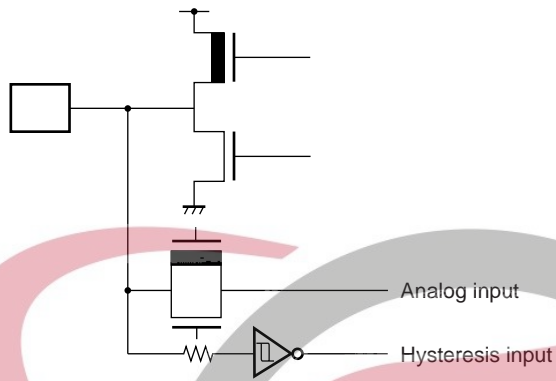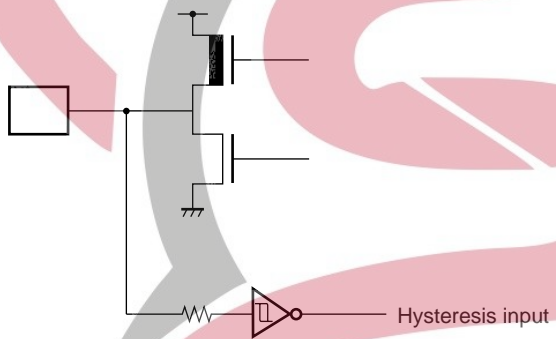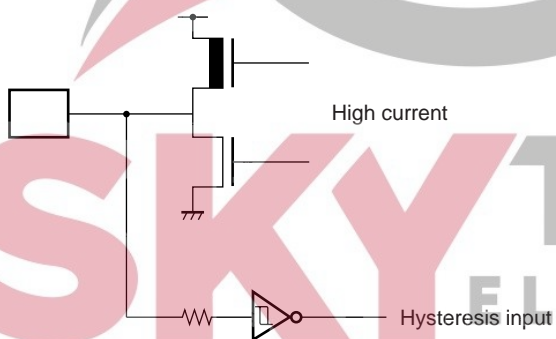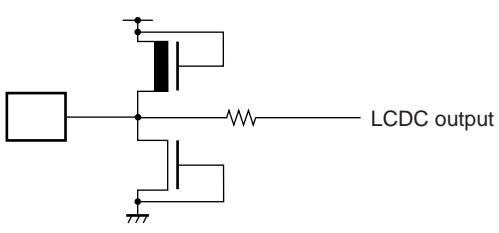Type	Circuit	Remarks
F		<ul style="list-style-type: none"> <li>• CMOS output</li> <li>• Hysteresis input</li> <li>• Analog input</li> </ul>
G		<ul style="list-style-type: none"> <li>• CMOS output</li> <li>• Hysteresis input</li> </ul>
H		<ul style="list-style-type: none"> <li>• CMOS high current output</li> <li>• Hysteresis input</li> </ul>
I		<ul style="list-style-type: none"> <li>• LCDC output</li> </ul>



## ■ HANDLING DEVICES

When handling semiconductor devices, care must be taken with regard to the following eleven matters.

- Strictly observe maximum rated voltages (prevent latchup)
- Stable supply voltage
- Power-on procedures
- Treatment of unused input pins
- Treatment of A/D converter power supply pins
- Use of external clock signals
- Power supply pins
- Proper sequence of A/D converter power supply analog input
- Handling the power supply for high-current output buffer pins ( $DV_{CC}$ ,  $DV_{SS}$ )
- Pull-up/pull-down resistance
- Precautions when not using a sub clock signal.

### Precautions for Handling Semiconductor Devices

- **Strictly observe maximum rated voltages (prevent latchup)**

When CMOS integrated circuit devices are subjected to applied voltages higher than  $V_{CC}$  at input and output pins other than medium- and high-withstand voltage pins, or to voltages lower than  $V_{SS}$ , or when voltages in excess of rated levels are applied between  $V_{CC}$  and  $V_{SS}$ , a phenomenon known as latchup can occur. In a latchup condition, supply current can increase dramatically and may destroy semiconductor elements. In using semiconductor devices, always take sufficient care to avoid exceeding maximum ratings.

Also care must be taken when power to analog systems is switched on or off, to ensure that the analog power supply ( $AV_{CC}$ ,  $AVRH$ ), analog input and dedicated power supply for the high current output buffer pins ( $DV_{CC}$ ) do not exceed the digital power supply ( $V_{CC}$ ).

Once the digital power supply ( $V_{CC}$ ) is switched on, the analog power ( $AV_{CC}$ ,  $AVRH$ ) and dedicated power supply for the high current output buffer pins ( $DV_{CC}$ ) may be turned on in any sequence.

- **Stable supply voltage**

Even within the warranted operating range of  $V_{CC}$  supply voltage, sudden fluctuations in supply voltage can cause abnormal operation. The recommended stability for ripple fluctuations (P-P values) at commercial frequencies (50 to 60 Hz) should be within 10% of the standard  $V_{CC}$  value, and voltage fluctuations that occur during switching of power supplies etc. should be limited to transient fluctuation rates of 0.1 V/ms or less.

- **Power-on procedures**

In order to prevent abnormal operation of the internal built-in step-down circuits, voltage rise time during power-on should be attained within 50  $\mu$ s (0.2 V to 2.7 V).

- **Treatment of unused input pins**

If unused input pins are left open, they may cause abnormal operation or latchup which may lead to permanent damage to the semiconductor. Any such pins should be pulled up or pulled down through resistance of at least 2 k $\Omega$ .


Also any unused input/output pins should be left open in output status, or if found set to input status, they should be treated in the same way as input pins.

- **Treatment of A/D converter power supply pins**

Even if the A/D converter is not used, pins should be connected so that  $AV_{CC} = V_{CC}$ , and  $AV_{SS} = AVRH = V_{SS}$ .

- **Use of external clock signals**


Even when an external clock is used, a stabilization period is required following a power-on reset or release from sub clock mode or stop mode. Also, when an external clock is used it should drive only the X0 pin and the X1 pin should be left open, as shown in Figure 3.

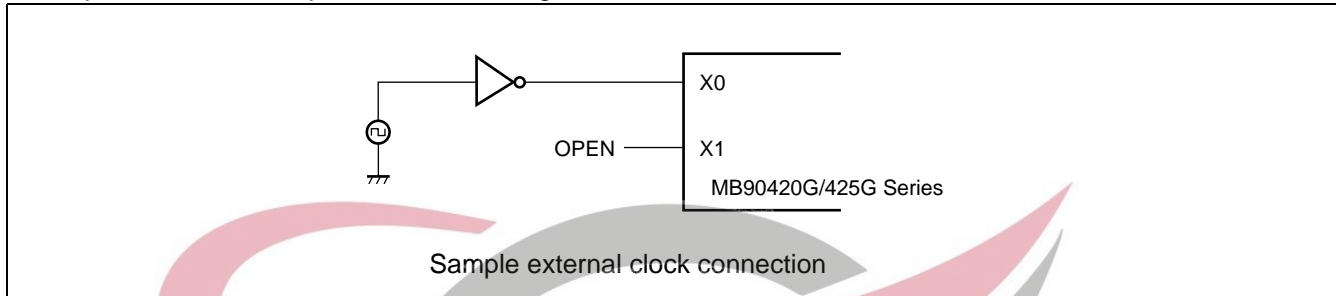

- **Power supply pins**

Devices are designed to prevent problems such as latchup when multiple  $V_{CC}$  and  $V_{SS}$  supply pins are used, by providing internal connections between pins having the same potential. However, in order to reduce unwanted radiation, and to prevent abnormal operation of strobe signals due to rise in ground level, and to maintain total output current ratings, all such pins should always be connected externally to power supplies and ground.

As shown in Figure 4, all  $V_{CC}$  power supply pins must have the same potential. All  $V_{SS}$  power supply pins should be handled in the same way. If there are multiple  $V_{CC}$  or  $V_{SS}$  systems, the device will not operate properly even within the warranted operating range.

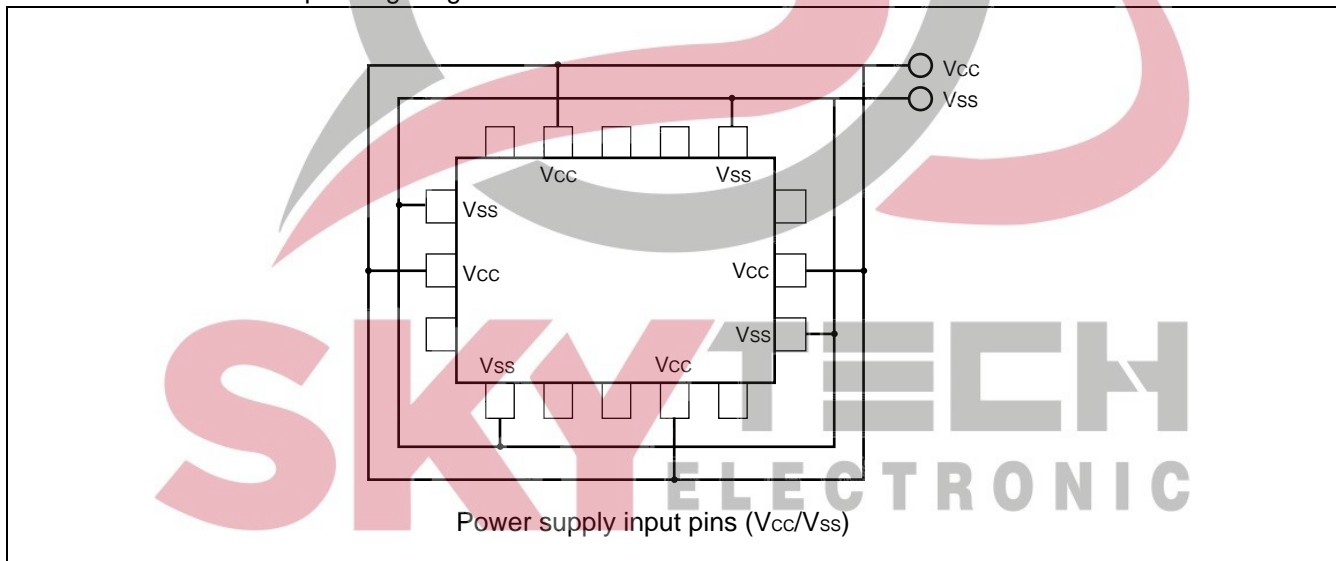

In addition, care must be given to connecting the  $V_{CC}$  and  $V_{SS}$  pins of this device to a current source with as little impedance as possible. It is recommended that a bypass capacitor of  $1.0 \mu\text{F}$  be connected between  $V_{CC}$  and  $V_{SS}$  as close to the pins as possible.

- **Proper sequence of A/D converter power supply analog input**

A/D converter power ( $AV_{CC}$ ,  $AV_{RH}$ ) and analog input ( $AN0$ - $AN7$ ) must be applied after the digital power supply ( $V_{CC}$ ) is switched on. When power is shut off, the A/D converter power supply and analog input must be cut off before the digital power supply is switched on ( $V_{CC}$ ). In both power-on and shut-off, care should be taken that  $AV_{RH}$  does not exceed  $AV_{CC}$ . Even when pins which double as analog input pins are used as input ports, be sure that the input voltage does not exceed  $AV_{CC}$ . (There is no problem if analog power supplies and digital power supplies are turned off and on at the same time.)

# MB90420G/425G Series

- **Handling the power supply for high-current output buffer pins ( $DV_{CC}$ ,  $DV_{SS}$ )**

Always apply power to high-current output buffer pins ( $DV_{CC}$ ,  $DV_{SS}$ ) after the digital power supply ( $V_{CC}$ ) is turned on. Also when switching power off, always shut off the power supply to the high-current output buffer pins ( $DV_{CC}$ ,  $DV_{SS}$ ) before switching off the digital power supply ( $V_{CC}$ ). (There will be no problem if high-current output buffer pins and digital power supplies are turned off and on at the same time.)

Even when high-current output buffer pins are used as general purpose ports, the power for high current output buffer pins ( $DV_{CC}$ ,  $DV_{SS}$ ) should be applied to these pins.

- **Pull-up/pull-down resistance**

The MB90420G/425G series does not support internal pull-up/pull-down resistance. If necessary, use external components.


- **Precautions for when not using a sub clock signal.**

If the X0A and X1A pins are not connected to an oscillator, apply pull-down treatment to the X0A pin and leave the X1A pin open.



# MB90420G/425G Series

## ■ BLOCK DIAGRAM

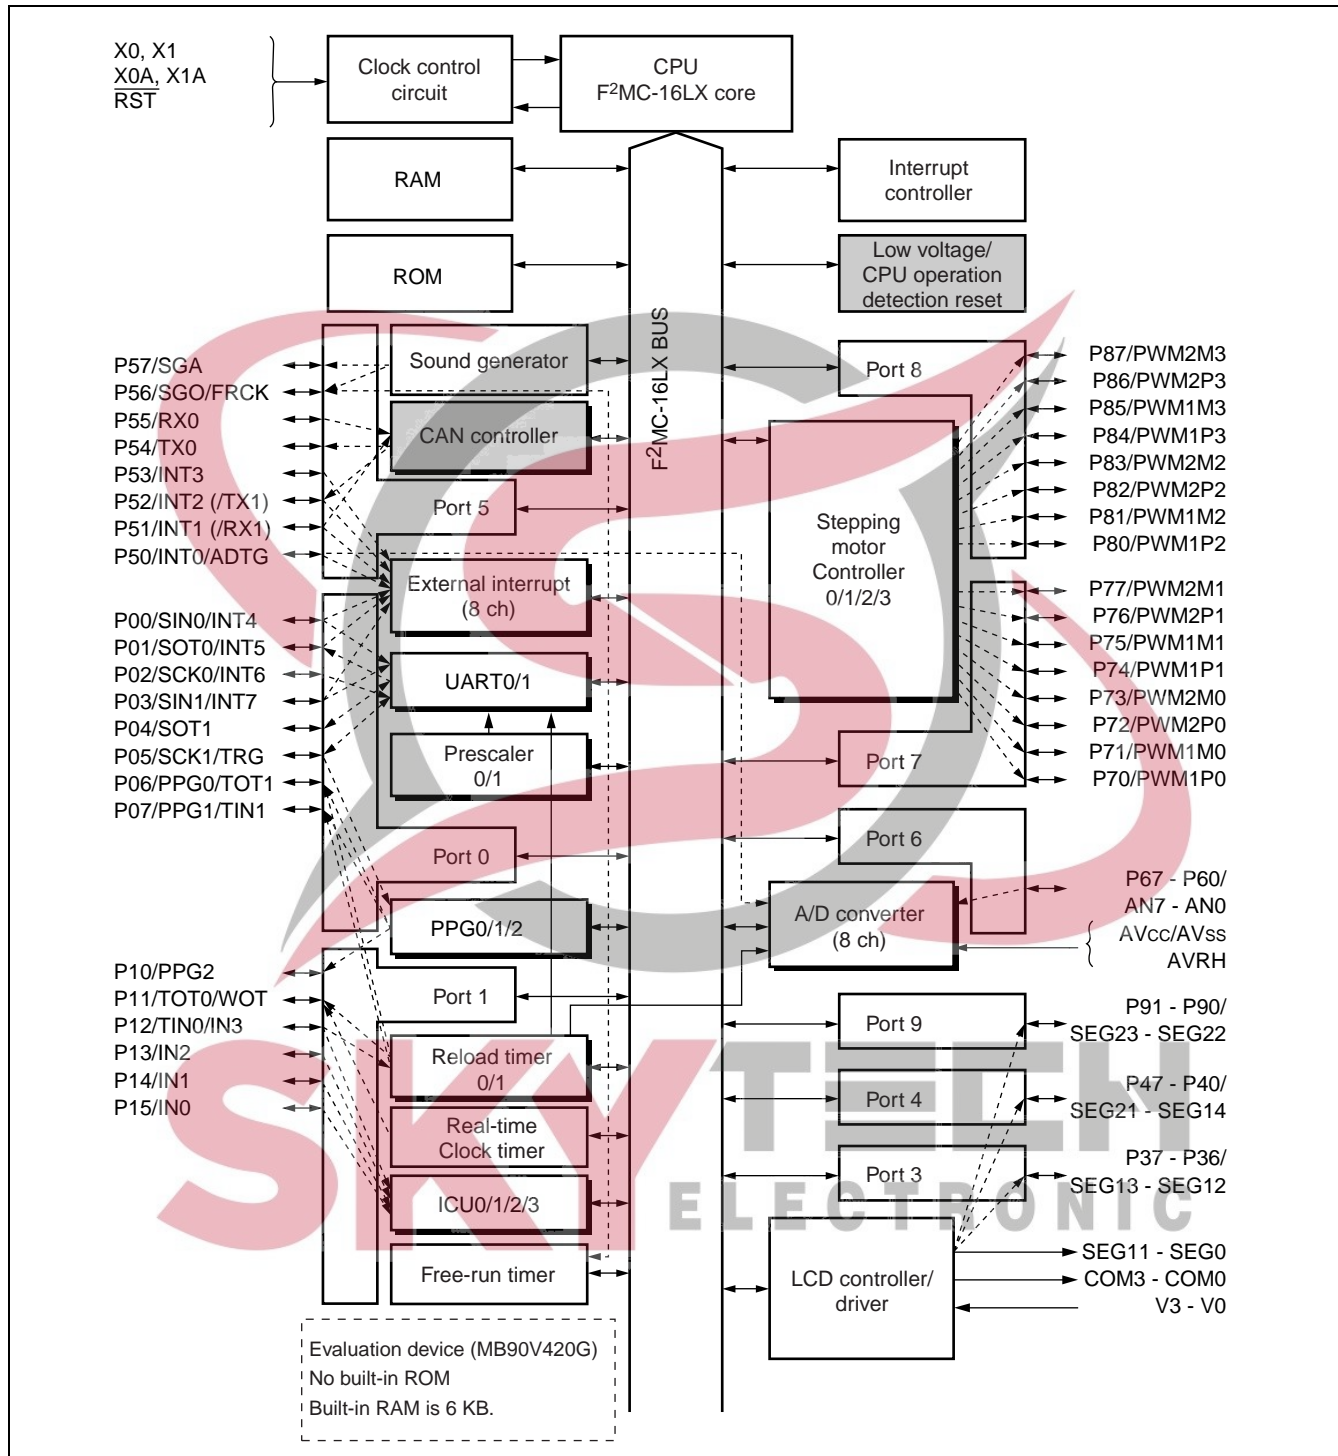


Note: MB90420G series is equipped with 2-channel CAN interface and MB90425G series is equipped with 1-channel CAN interface. MB90F423GA, MB90423GA, MB90423GB, MB90F428GA, MB90F428GB, MB90427GA, MB90427GB, MB90428GA and MB90428GB have low voltage/CPU operation detection reset. MB90F423GC, MB90423GC, MB90F428GC, MB90427GC, MB90428GC and MB90V420G do not have low voltage/CPU operation detection reset.

See "■ Product Lineup" for detail.

# MB90420G/425G Series

## MEMORY MAP

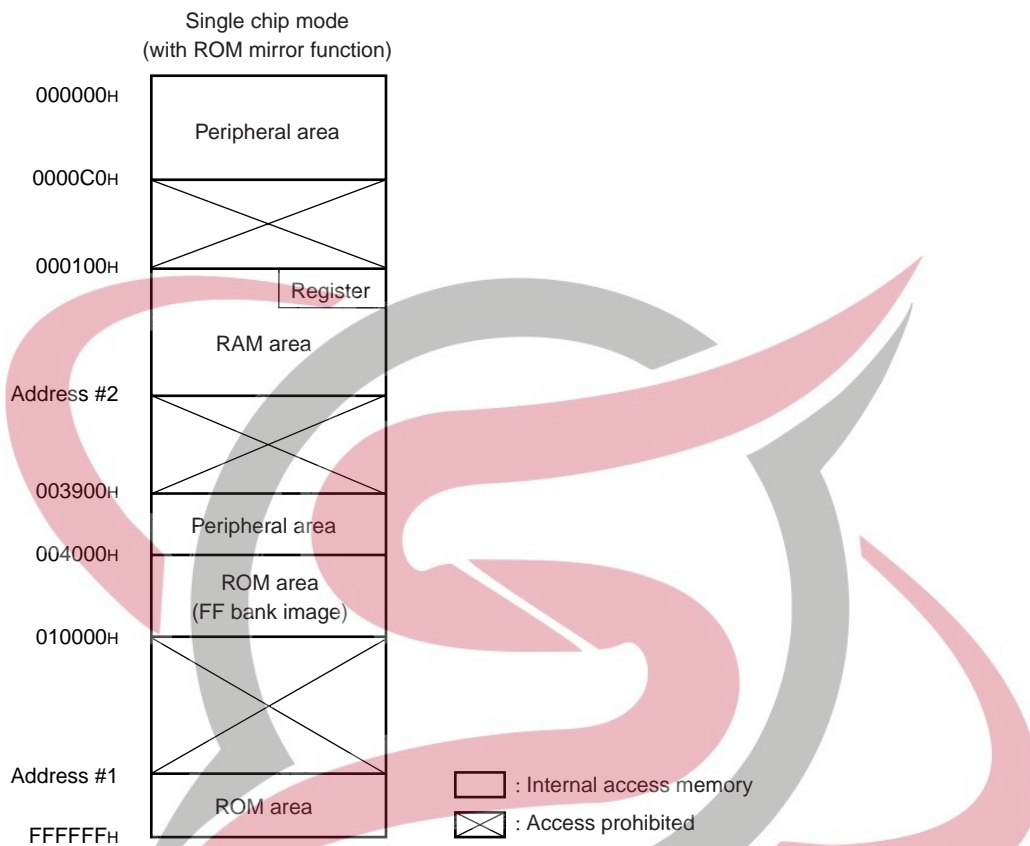

Parts No.	Address #1	Address #2
MB90423GA/GB/GC	FE0000 <sub>H</sub>	001900 <sub>H</sub>
MB90427GA/GB/GC	FF0000 <sub>H</sub>	001100 <sub>H</sub>
MB90428GA/GB/GC	FE0000 <sub>H</sub>	001900 <sub>H</sub>
MB90F423GA/GB/GC	FE0000 <sub>H</sub>	001900 <sub>H</sub>
MB90F428GA/GB/GC	FE0000 <sub>H</sub>	001900 <sub>H</sub>
MB90V420G	FE0000 <sub>H</sub> *	001900 <sub>H</sub>

\* : MB90V420G has no built-in ROM. On the tool side this area may be considered a ROM decoder.

Note : To select models without the ROM mirror function, see the “ROM Mirror Function Selection Module.” The image of the ROM data in the FF bank appears at the top of the 00 bank, in order to enable efficient use of small C compiler models. The lower 16-bit address for the FF bank will be assigned to the same address, so that tables in ROM can be referenced without declaring a “far” indication with the pointer. For example when accessing the address 00C000<sub>H</sub>, the actual access is to address FFC000<sub>H</sub> in ROM. Here the FF bank ROM area exceeds 48 KB, so that it is not possible to see the entire area in the 00 bank image. Therefore because the ROM data from FF4000<sub>H</sub> to FFFFFFF<sub>H</sub> will appear in the image from 004000<sub>H</sub> to 00FFFF<sub>H</sub>, it is recommended that the ROM data table be stored in the area from FF4000<sub>H</sub> to FFFFFFF<sub>H</sub>.



# MB90420G/425G Series

## ■ I/O MAP

- Other than CAN Interface

Address	Register name	Symbol	Read/write	Peripheral function	Initial value
00H	Port 0 data register	PDR0	R/W	Port 0	XXXXXXXXXX
01H	Port 1 data register	PDR1	R/W	Port 1	- - XXXXXXXX
02H	(Disabled)				
03H	Port 3 data register	PDR3	R/W	Port 3	XX - - - - -
04H	Port 4 data register	PDR4	R/W	Port 4	XXXXXXXXXX
05H	Port 5 data register	PDR5	R/W	Port 5	XXXXXXXXXX
06H	Port 6 data register	PDR6	R/W	Port 6	XXXXXXXXXX
07H	Port 7 data register	PDR7	R/W	Port 7	XXXXXXXXXX
08H	Port 8 data register	PDR8	R/W	Port 8	XXXXXXXXXX
09H	Port 9 data register	PDR9	R/W	Port 9	- - - - - XX
0AH to 0FH	(Disabled)				
10H	Port 0 direction register	DDR0	R/W	Port 0	0 0 0 0 0 0 0
11H	Port 1 direction register	DDR1	R/W	Port 1	- - 0 0 0 0 0
12H	(Disabled)				
13H	Port 3 direction register	DDR3	R/W	Port 3	0 0 - - - - -
14H	Port 4 direction register	DDR4	R/W	Port 4	0 0 0 0 0 0 0
15H	Port 5 direction register	DDR5	R/W	Port 5	0 0 0 0 0 0 0
16H	Port 6 direction register	DDR6	R/W	Port 6	0 0 0 0 0 0 0
17H	Port 7 direction register	DDR7	R/W	Port 7	0 0 0 0 0 0 0
18H	Port 8 direction register	DDR8	R/W	Port 8	0 0 0 0 0 0 0
19H	Port 9 direction register	DDR9	R/W	Port 9	- - - - - 0 0
1AH	Analog input enable	ADER	R/W	Port 6, A/D	1 1 1 1 1 1 1
1BH to 1FH	(Disabled)				
20H	A/D control status register lower	ADCSL	R/W	A/D converter	0 0 0 0 0 0 0
21H	A/D control status register higher	ADCSH	R/W		0 0 0 0 0 0 0
22H	A/D data register lower	ADCRL	R		XXXXXXXXXX
23H	A/D data register higher	ADCRH	R/W		0 0 1 0 1 XXX
24H	Compare clear register	CPCLR	R/W	16-bit free-run timer	XXXXXXXXXX
25H			R/W		XXXXXXXXXX
26H	Timer data register	TCDT	R/W		0 0 0 0 0 0 0
27H			R/W		0 0 0 0 0 0 0
28H	Timer control status register lower	TCCSL	R/W		0 0 0 0 0 0 0
29H	Timer control status register higher	TCCSH	R/W		0 - - 0 0 0 0

(Continued)

# MB90420G/425G Series

Address	Register name	Symbol	Read/write	Peripheral function	Initial value
2A <sub>H</sub>	PPG0 control status register lower	PCNTL0	R/W	16-bit PPG0	0 0 0 0 0 0 0 0
2B <sub>H</sub>	PPG0 control status register higher	PCNTH0	R/W		0 0 0 0 0 0 0 -
2C <sub>H</sub>	PPG1 control status register lower	PCNTL1	R/W	16-bit PPG1	0 0 0 0 0 0 0 0
2D <sub>H</sub>	PPG1 control status register higher	PCNTH1	R/W		0 0 0 0 0 0 0 -
2E <sub>H</sub>	PPG2 control status register lower	PCNTL2	R/W	16-bit PPG2	0 0 0 0 0 0 0 0
2F <sub>H</sub>	PPG2 control status register higher	PCNTH2	R/W		0 0 0 0 0 0 0 -
30 <sub>H</sub>	External interrupt enable	ENIR	R/W	External interrupt	0 0 0 0 0 0 0 0
31 <sub>H</sub>	External interrupt request	EIRR	R/W		0 0 0 0 0 0 0 0
32 <sub>H</sub>	External interrupt level lower	ELVRL	R/W		0 0 0 0 0 0 0 0
33 <sub>H</sub>	External interrupt level higher	ELVRH	R/W		0 0 0 0 0 0 0 0
34 <sub>H</sub>	Serial mode register 0	SMR0	R/W	UART 0	0 0 0 0 0 - 0 0
35 <sub>H</sub>	Serial control register 0	SCR0	R/W		0 0 0 0 0 1 0 0
36 <sub>H</sub>	Input data register 0/ Output data register 0	SIDR0/ SODR0	R/W		XXXXXXXXXX
37 <sub>H</sub>	Serial status register 0	SSR0	R/W		0 0 0 0 1 0 0 0
38 <sub>H</sub>	Serial mode register 1	SMR1	R/W	UART 1	0 0 0 0 0 - 0 0
39 <sub>H</sub>	Serial control register 1	SCR1	R/W		0 0 0 0 0 1 0 0
3A <sub>H</sub>	Input data register 1/ Output data register 1	SIDR1/ SODR1	R/W		XXXXXXXXXX
3B <sub>H</sub>	Serial status register 1	SSR1	R/W		0 0 0 0 1 0 0 0
3C <sub>H</sub>	(Disabled)				
3D <sub>H</sub>	Clock division control register 0	CDCR0	R/W	Prescaler	0 - - - 0 0 0 0
3E <sub>H</sub>	CAN wake-up control register	CWUCR	R/W	CAN	- - - - - 0
3F <sub>H</sub>	Clock division control register 1	CDCR1	R/W	Prescaler	0 - - - 0 0 0 0
40 <sub>H</sub> to 4F <sub>H</sub>	Area reserved for CAN interface 0				
50 <sub>H</sub>	Timer control status register 0 lower	TMCSR0L	R/W	16-bit reload timer 0	0 0 0 0 0 0 0 0
51 <sub>H</sub>	Timer control status register 0 higher	TMCSR0H	R/W		- - - 0 0 0 0 0
52 <sub>H</sub>	Timer register 0/ Reload register 0	TMR0/ TMRLR0	R/W		XXXXXXXXXX
53 <sub>H</sub>					XXXXXXXXXX
54 <sub>H</sub>	Timer control status register 1 lower	TMCSR1L	R/W	16-bit reload timer 1	0 0 0 0 0 0 0 0
55 <sub>H</sub>	Timer control status register 1 higher	TMCSR1H	R/W		- - - 0 0 0 0 0
56 <sub>H</sub>	Timer register 1/ Reload register 1	TMR1/ TMRLR1	R/W		XXXXXXXXXX
57 <sub>H</sub>					XXXXXXXXXX
58 <sub>H</sub>	Clock timer control register lower	WTCRL	R/W	Real-time clock timer	0 0 0 - - 0 0 0
59 <sub>H</sub>	Clock timer control register higher	WTCRH	R/W		0 0 0 0 0 0 0 0

(Continued)

# MB90420G/425G Series

Address	Register name	Symbol	Read/write	Peripheral function	Initial value
5A <sub>H</sub>	Sound control register lower	SGCRL	R/W	Sound generator	0 0 0 0 0 0 0
5B <sub>H</sub>	Sound control register higher	SGCRH	R/W		0 - - - - 0 0
5C <sub>H</sub>	Frequency data register	SGFR	R/W		XXXXXXXXXX
5D <sub>H</sub>	Amplitude data register	SGAR	R/W		0 0 0 0 0 0 0
5E <sub>H</sub>	Decrement grade register	SGDR	R/W		XXXXXXXXXX
5F <sub>H</sub>	Tone count register	SGTR	R/W		XXXXXXXXXX
60 <sub>H</sub>	Input capture register 0	IPCP0	R	Input capture 0/1	XXXXXXXXXX
61 <sub>H</sub>					XXXXXXXXXX
62 <sub>H</sub>	Input capture register 1	IPCP1	R		XXXXXXXXXX
63 <sub>H</sub>					XXXXXXXXXX
64 <sub>H</sub>	Input capture register 2	IPCP2	R	Input capture 2/3	XXXXXXXXXX
65 <sub>H</sub>					XXXXXXXXXX
66 <sub>H</sub>	Input capture register 3	IPCP3	R		XXXXXXXXXX
67 <sub>H</sub>					XXXXXXXXXX
68 <sub>H</sub>	Input capture control status 0/1	ICS01	R/W	Input capture 0/1	0 0 0 0 0 0 0
69 <sub>H</sub>	(Disabled)				
6A <sub>H</sub>	Input capture control status 2/3	ICS23	R/W	Input capture 2/3	0 0 0 0 0 0 0
6B <sub>H</sub>	(Disabled)				
6C <sub>H</sub>	LCD control register lower	LCRL	R/W	LCD controller/ driver	0 0 0 1 0 0 0 0
6D <sub>H</sub>	LCD control register higher	LCRH	R/W		0 0 0 0 0 0 0 0
6E <sub>H</sub>	Low voltage/CPU operation detection reset control register	LVRC	R/W	Low voltage/CPU operation detection reset	1 0 1 1 1 0 0 0
6F <sub>H</sub>	ROM mirror	ROMM	W	ROM mirror	XXXXXXXXX1
70 <sub>H</sub> to 7F <sub>H</sub>	Area reserved for CAN interface 1				
80 <sub>H</sub>	PWM control register 0	PWC0	R/W	Stepping motor controller0	0 0 0 0 0 - - 0
81 <sub>H</sub>	(Disabled)				
82 <sub>H</sub>	PWM control register 1	PWC1	R/W	Stepping motor controller1	0 0 0 0 0 - - 0
83 <sub>H</sub>	(Disabled)				
84 <sub>H</sub>	PWM control register 2	PWC2	R/W	Stepping motor controller2	0 0 0 0 0 - - 0
85 <sub>H</sub>	(Disabled)				
86 <sub>H</sub>	PWM control register 3	PWC3	R/W	Stepping motor controller3	0 0 0 0 0 - - 0
87 <sub>H</sub> to 9D <sub>H</sub>	(Disabled)				

(Continued)

# MB90420G/425G Series

(Continued)

Address	Register name	Symbol	Read/write	Peripheral function	Initial value
9E <sub>H</sub>	ROM correction control register	PACSR	R/W	Address match detection function	-----0-0
9F <sub>H</sub>	Delay interrupt/release	DIRR	R/W	Delayed interrupt	-----0
A0 <sub>H</sub>	Power saving mode	LPMCR	R/W	Power saving control circuit	00011000
A1 <sub>H</sub>	Clock select	CKSCR	R/W		11111100
A2 <sub>H</sub> to A7 <sub>H</sub>	(Disabled)				
A8 <sub>H</sub>	Watchdog control	WDTC	R/W	Watchdog timer	XXXXX111
A9 <sub>H</sub>	Time base timer control register	TBTC	R/W	Time base timer	1--00100
AA <sub>H</sub>	Clock timer control register	WTC	R/W	Clock timer (sub clock)	1X000000
AB <sub>H</sub> to AD <sub>H</sub>	(Disabled)				
AE <sub>H</sub>	Flash control register	FMCS	R/W	Flash interface	000X0XX0
AF <sub>H</sub>	(Disabled)				
B0 <sub>H</sub>	Interrupt control register 00	ICR00	R/W	Interrupt controller	00000111
B1 <sub>H</sub>	Interrupt control register 01	ICR01	R/W		00000111
B2 <sub>H</sub>	Interrupt control register 02	ICR02	R/W		00000111
B3 <sub>H</sub>	Interrupt control register 03	ICR03	R/W		00000111
B4 <sub>H</sub>	Interrupt control register 04	ICR04	R/W		00000111
B5 <sub>H</sub>	Interrupt control register 05	ICR05	R/W		00000111
B6 <sub>H</sub>	Interrupt control register 06	ICR06	R/W		00000111
B7 <sub>H</sub>	Interrupt control register 07	ICR07	R/W		00000111
B8 <sub>H</sub>	Interrupt control register 08	ICR08	R/W		00000111
B9 <sub>H</sub>	Interrupt control register 09	ICR09	R/W		00000111
BA <sub>H</sub>	Interrupt control register 10	ICR10	R/W		00000111
BB <sub>H</sub>	Interrupt control register 11	ICR11	R/W		00000111
BC <sub>H</sub>	Interrupt control register 12	ICR12	R/W		00000111
BD <sub>H</sub>	Interrupt control register 13	ICR13	R/W		00000111
BE <sub>H</sub>	Interrupt control register 14	ICR14	R/W		00000111
BF <sub>H</sub>	Interrupt control register 15	ICR15	R/W		00000111
C0 <sub>H</sub> to FF <sub>H</sub>	(Disabled)				

# MB90420G/425G Series

Address	Register name	Symbol	Read/write	Peripheral function	Initial value
1FF0 <sub>H</sub>	ROM correction address 0	PADR0	R/W	Address match detection function	XXXXXXXXXX
1FF1 <sub>H</sub>	ROM correction address 1	PADR0	R/W		XXXXXXXXXX
1FF2 <sub>H</sub>	ROM correction address 2	PADR0	R/W		XXXXXXXXXX
1FF3 <sub>H</sub>	ROM correction address 3	PADR1	R/W		XXXXXXXXXX
1FF4 <sub>H</sub>	ROM correction address 4	PADR1	R/W		XXXXXXXXXX
1FF5 <sub>H</sub>	ROM correction address 5	PADR1	R/W		XXXXXXXXXX
3900 <sub>H</sub> to 391F <sub>H</sub>	(Disabled)				
3920 <sub>H</sub>	PPG0 down counter register	PDCR0	R	16-bit PPG 0	1 1 1 1 1 1 1 1
3921 <sub>H</sub>					1 1 1 1 1 1 1 1
3922 <sub>H</sub>	PPG0 cycle setting register	PCSR0	W		XXXXXXXXXX
3923 <sub>H</sub>					XXXXXXXXXX
3924 <sub>H</sub>	PPG0 duty setting register	PDUT0	W		XXXXXXXXXX
3925 <sub>H</sub>					XXXXXXXXXX
3926 <sub>H</sub> to 3927 <sub>H</sub>	(Disabled)				
3928 <sub>H</sub>	PPG1 down counter register	PDCR1	R	16-bit PPG 1	1 1 1 1 1 1 1 1
3929 <sub>H</sub>					1 1 1 1 1 1 1 1
392A <sub>H</sub>	PPG1 cycle setting register	PCSR1	W		XXXXXXXXXX
392B <sub>H</sub>					XXXXXXXXXX
392C <sub>H</sub>	PPG1 duty setting register	PDUT1	W		XXXXXXXXXX
392D <sub>H</sub>					XXXXXXXXXX
392E <sub>H</sub> to 392F <sub>H</sub>	(Disabled)				
3930 <sub>H</sub>	PPG2 down counter register	PDCR2	R	16 bit PPG 2	1 1 1 1 1 1 1 1
3931 <sub>H</sub>					1 1 1 1 1 1 1 1
3932 <sub>H</sub>	PPG2 cycle setting register	PCSR2	W		XXXXXXXXXX
3933 <sub>H</sub>					XXXXXXXXXX
3934 <sub>H</sub>	PPG2 duty setting register	PDUT2	W		XXXXXXXXXX
3935 <sub>H</sub>					XXXXXXXXXX
3936 <sub>H</sub> to 3959 <sub>H</sub>	(Disabled)				

(Continued)



# MB90420G/425G Series

Address	Register name	Symbol	Read/write	Peripheral function	Initial value			
395A <sub>H</sub>	Sub second data register	WTBR	R/W	Real time clock timer	XXXXXXXX			
395B <sub>H</sub>					XXXXXXXX			
395C <sub>H</sub>					- - - XXXXX			
395D <sub>H</sub>					Second data register	WTSR	R/W	-- XXXXXX
395E <sub>H</sub>					Minute data register	WTMR	R/W	-- XXXXXX
395F <sub>H</sub>	Hour data register	WTHR	R/W	- - - XXXXX				
3960 <sub>H</sub> to 396B <sub>H</sub>	LCD display RAM	VRAM	R/W	LCD controller/driver	XXXXXXXX			
396C <sub>H</sub> to 397F <sub>H</sub>	(Disabled)							
3980 <sub>H</sub>	PWM1 compare register 0	PWC10	R/W	Stepping motor controller 0	XXXXXXXX			
3981 <sub>H</sub>					- - - - - XX			
3982 <sub>H</sub>	PWM2 compare register 0	PWC20	R/W		XXXXXXXX			
3983 <sub>H</sub>					- - - - - XX			
3984 <sub>H</sub>	PWM1 select register 0	PWS10	R/W		- - 000000			
3985 <sub>H</sub>	PWM2 select register 0	PWS20	R/W		- 0000000			
3986 <sub>H</sub> to 3987 <sub>H</sub>	(Disabled)							
3988 <sub>H</sub>	PWM1 compare register 1	PWC11	R/W	Stepping motor controller 1	XXXXXXXX			
3989 <sub>H</sub>					- - - - - XX			
398A <sub>H</sub>	PWM2 compare register 1	PWC21	R/W		XXXXXXXX			
398B <sub>H</sub>					- - - - - XX			
398C <sub>H</sub>	PWM1 select register 1	PWS11	R/W		- - 000000			
398D <sub>H</sub>	PWM2 select register 1	PWS21	R/W		- 0000000			
398E <sub>H</sub> to 398F <sub>H</sub>	(Disabled)							
3990 <sub>H</sub>	PWM1 compare register 2	PWC12	R/W	Stepping motor controller 2	XXXXXXXX			
3991 <sub>H</sub>					- - - - - XX			
3992 <sub>H</sub>	PWM2 compare register 2	PWC22	R/W		XXXXXXXX			
3993 <sub>H</sub>					- - - - - XX			
3994 <sub>H</sub>	PWM1 select register 2	PWS12	R/W		- - 000000			
3995 <sub>H</sub>	PWM2 select register 2	PWS22	R/W		- 0000000			
3996 <sub>H</sub> to 3997 <sub>H</sub>	(Disabled)							

(Continued)

# MB90420G/425G Series

(Continued)

Address	Register name	Symbol	Read/write	Peripheral function	Initial value
3998 <sub>H</sub>	PWM1 compare register 3	PWC13	R/W	Stepping motor controller 3	XXXXXXXX
3999 <sub>H</sub>					-----XX
399A <sub>H</sub>	PWM2 compare register 3	PWC23	R/W		XXXXXXXX
399B <sub>H</sub>					-----XX
399C <sub>H</sub>	PWM1 select register 3	PWS13	R/W		--000000
399D <sub>H</sub>	PWM2 select register 3	PWS23	R/W		-0000000
399E <sub>H</sub> to 39FF <sub>H</sub>	(Disabled)				
3A00 <sub>H</sub> to 3AFF <sub>H</sub>	Area reserved for CAN interface 0				
3B00 <sub>H</sub> to 3BFF <sub>H</sub>	Area reserved for CAN interface 1				
3C00 <sub>H</sub> to 3CFF <sub>H</sub>	Area reserved for CAN interface 0				
3D00 <sub>H</sub> to 3DFF <sub>H</sub>	Area reserved for CAN interface 1				
3E00 <sub>H</sub> to 3EFF <sub>H</sub>	(Disabled)				

- Initial value symbols :
  - “0” initial value 0.
  - “1” initial value 1.
  - “X” initial value undetermined
  - “-” initial value undetermined (none)
- Write/read symbols :
  - “R/W” read/write enabled
  - “R” read only
  - “W” write only
- Addresses in the area 0000<sub>H</sub> to 00FF<sub>H</sub> are reserved for the principal functions of the MCU. Read access attempts to reserved areas will result in an “X” value. Also, write access to reserved areas is prohibited.

# MB90420G/425G Series

• I/O Map for CAN Interface

Address		Register name	Symbol	Read/write	Initial value
CAN0	CAN1				
000040H	000070H	Message buffer valid area	BVALR	(R/W)	00000000 00000000
000041H	000071H				
000042H	000072H	Transmission request register	TREQR	(R/W)	00000000 00000000
000043H	000073H				
000044H	000074H	Transmission cancel register	TCANR	(W)	00000000 00000000
000045H	000075H				
000046H	000076H	Transmission completed register	TCR	(R/W)	00000000 00000000
000047H	000077H				
000048H	000078H	Receiving completed register	RCR	(R/W)	00000000 00000000
000049H	000079H				
00004AH	00007AH	Remote request receiving register	RRTRR	(R/W)	00000000 00000000
00004BH	00007BH				
00004CH	00007CH	Receiving overrun register	ROVRR	(R/W)	00000000 00000000
00004DH	00007DH				
00004EH	00007EH	Receiving interrupt enable register	RIER	(R/W)	00000000 00000000
00004FH	00007FH				
003C00H	003D00H	Control status register	CSR	(R/W, R)	00---000 0----0-1
003C01H	003D01H				
003C02H	003D02H	Last event indicator register	LEIR	(R/W)	----- 000-0000
003C03H	003D03H				
003C04H	003D04H	RX/TX error counter	RTEC	(R)	00000000 00000000
003C05H	003D05H				
003C06H	003D06H	Bit timing register	BTR	(R/W)	-1111111 11111111
003C07H	003D07H				
003C08H	003D08H	IDE register	IDER	(R/W)	XXXXXXXX XXXXXXXX
003C09H	003D09H				
003C0AH	003D0AH	Transmission RTR register	TRTRR	(R/W)	00000000 00000000
003C0BH	003D0BH				
003C0CH	003D0CH	Remote frame receiving wait register	RFWTR	(R/W)	XXXXXXXX XXXXXXXX
003C0DH	003D0DH				
003C0EH	003D0EH	Transmission interrupt enable register	TIER	(R/W)	00000000 00000000
003C0FH	003D0FH				

(Continued)

# MB90420G/425G Series

Address		Register name	Symbol	Read/write	Initial value	
CAN0	CAN1					
003C10 <sub>H</sub>	003D10 <sub>H</sub>	Acceptance mask select register	AMSR	(R/W)	XXXXXXXX	XXXXXXXX
003C11 <sub>H</sub>	003D11 <sub>H</sub>					
003C12 <sub>H</sub>	003D12 <sub>H</sub>					
003C13 <sub>H</sub>	003D13 <sub>H</sub>					
003C14 <sub>H</sub>	003D14 <sub>H</sub>	Acceptance mask register 0	AMR0	(R/W)	XXXXXXXX	XXXXXXXX
003C15 <sub>H</sub>	003D15 <sub>H</sub>					
003C16 <sub>H</sub>	003D16 <sub>H</sub>					
003C17 <sub>H</sub>	003D17 <sub>H</sub>					
003C18 <sub>H</sub>	003D18 <sub>H</sub>	Acceptance mask register 1	AMR1	(R/W)	XXXXXXXX	XXXXXXXX
003C19 <sub>H</sub>	003D19 <sub>H</sub>					
003C1A <sub>H</sub>	003D1A <sub>H</sub>					
003C1B <sub>H</sub>	003D1B <sub>H</sub>					
003A00 <sub>H</sub> to 003A1F <sub>H</sub>	003B00 <sub>H</sub> to 003B1F <sub>H</sub>	General purpose RAM	—	(R/W)	XXXXXXXX to XXXXXXXX	
003A20 <sub>H</sub>	003B20 <sub>H</sub>	ID register 0	IDR0	(R/W)	XXXXXXXX	XXXXXXXX
003A21 <sub>H</sub>	003B21 <sub>H</sub>					
003A22 <sub>H</sub>	003B22 <sub>H</sub>					
003A23 <sub>H</sub>	003B23 <sub>H</sub>					
003A24 <sub>H</sub>	003B24 <sub>H</sub>	ID register 1	IDR1	(R/W)	XXXXXXXX	XXXXXXXX
003A25 <sub>H</sub>	003B25 <sub>H</sub>					
003A26 <sub>H</sub>	003B26 <sub>H</sub>					
003A27 <sub>H</sub>	003B27 <sub>H</sub>					
003A28 <sub>H</sub>	003B28 <sub>H</sub>	ID register 2	IDR2	(R/W)	XXXXXXXX	XXXXXXXX
003A29 <sub>H</sub>	003B29 <sub>H</sub>					
003A2A <sub>H</sub>	003B2A <sub>H</sub>					
003A2B <sub>H</sub>	003B2B <sub>H</sub>					
003A2C <sub>H</sub>	003B2C <sub>H</sub>	ID register 3	IDR3	(R/W)	XXXXXXXX	XXXXXXXX
003A2D <sub>H</sub>	003B2D <sub>H</sub>					
003A2E <sub>H</sub>	003B2E <sub>H</sub>					
003A2F <sub>H</sub>	003B2F <sub>H</sub>					
003A30 <sub>H</sub>	003B30 <sub>H</sub>	ID register 4	IDR4	(R/W)	XXXXXXXX	XXXXXXXX
003A31 <sub>H</sub>	003B31 <sub>H</sub>					
003A32 <sub>H</sub>	003B32 <sub>H</sub>					
003A33 <sub>H</sub>	003B33 <sub>H</sub>					

(Continued)

# MB90420G/425G Series

Address		Register name	Symbol	Read/write	Initial value	
CAN0	CAN1					
003A34 <sub>H</sub>	003B34 <sub>H</sub>	ID register 5	IDR5	(R/W)	XXXXXXXX	XXXXXXXX
003A35 <sub>H</sub>	003B35 <sub>H</sub>				XXXXX---	XXXXXXXX
003A36 <sub>H</sub>	003B36 <sub>H</sub>					
003A37 <sub>H</sub>	003B37 <sub>H</sub>					
003A38 <sub>H</sub>	003B38 <sub>H</sub>	ID register 6	IDR6	(R/W)	XXXXXXXX	XXXXXXXX
003A39 <sub>H</sub>	003B39 <sub>H</sub>				XXXXX---	XXXXXXXX
003A3A <sub>H</sub>	003B3A <sub>H</sub>					
003A3B <sub>H</sub>	003B3B <sub>H</sub>	ID register 7	IDR7	(R/W)	XXXXXXXX	XXXXXXXX
003A3C <sub>H</sub>	003B3C <sub>H</sub>				XXXXX---	XXXXXXXX
003A3D <sub>H</sub>	003B3D <sub>H</sub>					
003A3E <sub>H</sub>	003B3E <sub>H</sub>					
003A3F <sub>H</sub>	003B3F <sub>H</sub>	ID register 8	IDR8	(R/W)	XXXXXXXX	XXXXXXXX
003A40 <sub>H</sub>	003B40 <sub>H</sub>				XXXXX---	XXXXXXXX
003A41 <sub>H</sub>	003B41 <sub>H</sub>					
003A42 <sub>H</sub>	003B42 <sub>H</sub>					
003A43 <sub>H</sub>	003B43 <sub>H</sub>	ID register 9	IDR9	(R/W)	XXXXXXXX	XXXXXXXX
003A44 <sub>H</sub>	003B44 <sub>H</sub>				XXXXX---	XXXXXXXX
003A45 <sub>H</sub>	003B45 <sub>H</sub>					
003A46 <sub>H</sub>	003B46 <sub>H</sub>					
003A47 <sub>H</sub>	003B47 <sub>H</sub>	ID register 10	IDR10	(R/W)	XXXXXXXX	XXXXXXXX
003A48 <sub>H</sub>	003B48 <sub>H</sub>				XXXXX---	XXXXXXXX
003A49 <sub>H</sub>	003B49 <sub>H</sub>					
003A4A <sub>H</sub>	003B4A <sub>H</sub>					
003A4B <sub>H</sub>	003B4B <sub>H</sub>	ID register 11	IDR11	(R/W)	XXXXXXXX	XXXXXXXX
003A4C <sub>H</sub>	003B4C <sub>H</sub>				XXXXX---	XXXXXXXX
003A4D <sub>H</sub>	003B4D <sub>H</sub>					
003A4E <sub>H</sub>	003B4E <sub>H</sub>					
003A4F <sub>H</sub>	003B4F <sub>H</sub>	ID register 12	IDR12	(R/W)	XXXXXXXX	XXXXXXXX
003A50 <sub>H</sub>	003B50 <sub>H</sub>				XXXXX---	XXXXXXXX
003A51 <sub>H</sub>	003B51 <sub>H</sub>					
003A52 <sub>H</sub>	003B52 <sub>H</sub>					
003A53 <sub>H</sub>	003B53 <sub>H</sub>					

(Continued)



# MB90420G/425G Series

Address		Register name	Symbol	Read/write	Initial value	
CAN0	CAN1					
003A54 <sub>H</sub>	003B54 <sub>H</sub>	ID register 13	IDR13	(R/W)	XXXXXXXX	XXXXXXXX
003A55 <sub>H</sub>	003B55 <sub>H</sub>					
003A56 <sub>H</sub>	003B56 <sub>H</sub>				XXXXX- - -	XXXXXXXX
003A57 <sub>H</sub>	003B57 <sub>H</sub>					
003A58 <sub>H</sub>	003B58 <sub>H</sub>	ID register 14	IDR14	(R/W)	XXXXXXXX	XXXXXXXX
003A59 <sub>H</sub>	003B59 <sub>H</sub>					
003A5A <sub>H</sub>	003B5A <sub>H</sub>				XXXXX- - -	XXXXXXXX
003A5B <sub>H</sub>	003B5B <sub>H</sub>	ID register 15	IDR15	(R/W)	XXXXXXXX	XXXXXXXX
003A5C <sub>H</sub>	003B5C <sub>H</sub>					
003A5D <sub>H</sub>	003B5D <sub>H</sub>					
003A5E <sub>H</sub>	003B5E <sub>H</sub>				XXXXX- - -	XXXXXXXX
003A5F <sub>H</sub>	003B5F <sub>H</sub>	DLC register 0	DLCR0	(R/W)	---XXXX	---XXXX
003A60 <sub>H</sub>	003B60 <sub>H</sub>					
003A61 <sub>H</sub>	003B61 <sub>H</sub>	DLC register 1	DLCR1	(R/W)	---XXXX	---XXXX
003A62 <sub>H</sub>	003B62 <sub>H</sub>					
003A63 <sub>H</sub>	003B63 <sub>H</sub>	DLC register 2	DLCR2	(R/W)	---XXXX	---XXXX
003A64 <sub>H</sub>	003B64 <sub>H</sub>					
003A65 <sub>H</sub>	003B65 <sub>H</sub>	DLC register 3	DLCR3	(R/W)	---XXXX	---XXXX
003A66 <sub>H</sub>	003B66 <sub>H</sub>					
003A67 <sub>H</sub>	003B67 <sub>H</sub>	DLC register 4	DLCR4	(R/W)	---XXXX	---XXXX
003A68 <sub>H</sub>	003B68 <sub>H</sub>					
003A69 <sub>H</sub>	003B69 <sub>H</sub>	DLC register 5	DLCR5	(R/W)	---XXXX	---XXXX
003A6A <sub>H</sub>	003B6A <sub>H</sub>					
003A6B <sub>H</sub>	003B6B <sub>H</sub>	DLC register 6	DLCR6	(R/W)	---XXXX	---XXXX
003A6C <sub>H</sub>	003B6C <sub>H</sub>					
003A6D <sub>H</sub>	003B6D <sub>H</sub>	DLC register 7	DLCR7	(R/W)	---XXXX	---XXXX
003A6E <sub>H</sub>	003B6E <sub>H</sub>					
003A6F <sub>H</sub>	003B6F <sub>H</sub>	DLC register 8	DLCR8	(R/W)	---XXXX	---XXXX
003A70 <sub>H</sub>	003B70 <sub>H</sub>					
003A71 <sub>H</sub>	003B71 <sub>H</sub>	DLC register 9	DLCR9	(R/W)	---XXXX	---XXXX
003A72 <sub>H</sub>	003B72 <sub>H</sub>					
003A73 <sub>H</sub>	003B73 <sub>H</sub>	DLC register 10	DLCR10	(R/W)	---XXXX	---XXXX
003A74 <sub>H</sub>	003B74 <sub>H</sub>					
003A75 <sub>H</sub>	003B75 <sub>H</sub>					

(Continued)

# MB90420G/425G Series

Address		Register name	Symbol	Read/write	Initial value
CAN0	CAN1				
003A76 <sub>H</sub>	003B76 <sub>H</sub>	DLC register 11	DLCR11	(R/W)	----XXXX    ----XXXX
003A77 <sub>H</sub>	003B77 <sub>H</sub>				
003A78 <sub>H</sub>	003B78 <sub>H</sub>	DLC register 12	DLCR12	(R/W)	----XXXX    ----XXXX
003A79 <sub>H</sub>	003B79 <sub>H</sub>				
003A7A <sub>H</sub>	003B7A <sub>H</sub>	DLC register 13	DLCR13	(R/W)	----XXXX    ----XXXX
003A7B <sub>H</sub>	003B7B <sub>H</sub>				
003A7C <sub>H</sub>	003B7C <sub>H</sub>	DLC register 14	DLCR14	(R/W)	----XXXX    ----XXXX
003A7D <sub>H</sub>	003B7D <sub>H</sub>				
003A7E <sub>H</sub>	003B7E <sub>H</sub>	DLC register 15	DLCR15	(R/W)	----XXXX    ----XXXX
003A7F <sub>H</sub>	003B7F <sub>H</sub>				
003A80 <sub>H</sub> to 003A87 <sub>H</sub>	003B80 <sub>H</sub> to 003B87 <sub>H</sub>	Data register 0 (8 bytes)	DTR0	(R/W)	XXXXXXXX to XXXXXXXX
003A88 <sub>H</sub> to 003A8F <sub>H</sub>	003B88 <sub>H</sub> to 003B8F <sub>H</sub>	Data register 1 (8 bytes)	DTR1	(R/W)	XXXXXXXX to XXXXXXXX
003A90 <sub>H</sub> to 003A97 <sub>H</sub>	003B90 <sub>H</sub> to 003B97 <sub>H</sub>	Data register 2 (8 bytes)	DTR2	(R/W)	XXXXXXXX to XXXXXXXX
003A98 <sub>H</sub> to 003A9F <sub>H</sub>	003B98 <sub>H</sub> to 003B9F <sub>H</sub>	Data register 3 (8 bytes)	DTR3	(R/W)	XXXXXXXX to XXXXXXXX
003AA0 <sub>H</sub> to 003AA7 <sub>H</sub>	003BA0 <sub>H</sub> to 003BA7 <sub>H</sub>	Data register 4 (8 bytes)	DTR4	(R/W)	XXXXXXXX to XXXXXXXX
003AA8 <sub>H</sub> to 003AAF <sub>H</sub>	003BA8 <sub>H</sub> to 003BAF <sub>H</sub>	Data register 5 (8 bytes)	DTR5	(R/W)	XXXXXXXX to XXXXXXXX
003AB0 <sub>H</sub> to 003AB7 <sub>H</sub>	003BB0 <sub>H</sub> to 003BB7 <sub>H</sub>	Data register 6 (8 bytes)	DTR6	(R/W)	XXXXXXXX to XXXXXXXX
003AB8 <sub>H</sub> to 003ABF <sub>H</sub>	003BB8 <sub>H</sub> to 003BBF <sub>H</sub>	Data register 7 (8 bytes)	DTR7	(R/W)	XXXXXXXX to XXXXXXXX
003AC0 <sub>H</sub> to 003AC7 <sub>H</sub>	003BC0 <sub>H</sub> to 003BC7 <sub>H</sub>	Data register 8 (8 bytes)	DTR8	(R/W)	XXXXXXXX to XXXXXXXX
003AC8 <sub>H</sub> to 003ACF <sub>H</sub>	003BC8 <sub>H</sub> to 003BCF <sub>H</sub>	Data register 9 (8 bytes)	DTR9	(R/W)	XXXXXXXX to XXXXXXXX

(Continued)

# MB90420G/425G Series

(Continued)

Address		Register name	Symbol	Read/write	Initial value
CAN0	CAN1				
003AD0 <sub>H</sub> to 003AD7 <sub>H</sub>	003BD0 <sub>H</sub> to 003BD7 <sub>H</sub>	Data register 10 (8 bytes)	DTR10	(R/W)	XXXXXXXX to XXXXXXXX
003AD8 <sub>H</sub> to 003ADF <sub>H</sub>	003BD8 <sub>H</sub> to 003BDF <sub>H</sub>	Data register 11 (8 bytes)	DTR11	(R/W)	XXXXXXXX to XXXXXXXX
003AE0 <sub>H</sub> to 003AE7 <sub>H</sub>	003BE0 <sub>H</sub> to 003BE7 <sub>H</sub>	Data register 12 (8 bytes)	DTR12	(R/W)	XXXXXXXX to XXXXXXXX
003AE8 <sub>H</sub> to 003AEF <sub>H</sub>	003BE8 <sub>H</sub> to 003BEF <sub>H</sub>	Data register 13 (8 bytes)	DTR13	(R/W)	XXXXXXXX to XXXXXXXX
003AF0 <sub>H</sub> to 003AF7 <sub>H</sub>	003BF0 <sub>H</sub> to 003BF7 <sub>H</sub>	Data register 14 (8 bytes)	DTR14	(R/W)	XXXXXXXX to XXXXXXXX
003AF8 <sub>H</sub> to 003AFF <sub>H</sub>	003BF8 <sub>H</sub> to 003BFF <sub>H</sub>	Data register 15 (8 bytes)	DTR15	(R/W)	XXXXXXXX to XXXXXXXX



**SKYTECH**  
ELECTRONIC



- ◎ : Compatible, with EI<sup>2</sup>OS stop function
- : Compatible
- △ : Compatible when interrupt sources sharing ICR are not in use
- × : Not compatible

- \*1 :
- Peripheral functions sharing the ICR register have the same interrupt level.
  - If peripheral functions sharing the ICR register are using expanded intelligent I/O services, one or the other cannot be used.
  - When peripheral functions are sharing the ICR register and one specifies expanded intelligent I/O services, the interrupt from the other function cannot be used.

- \*2 : Priority applies when interrupts of the same level are generated.





# MB90420G/425G Series

## ■ PERIPHERAL FUNCTIONS

### 1. I/O Ports

The I/O ports function is to send data from the CPU to be output from I/O pins and load input signals at the I/O pins into the CPU, according to the port data register (PDR) . Port input/output at I/O pins can be controlled in bit units by the port direction register (DDR) as required. The following list shows each of the functions as well as the shared peripheral function for each port.

- Port 0 : General purpose I/O port, shared with peripheral functions (external interrupt/UART/PPG)
- Port 1 : General purpose I/O port, shared with peripheral functions (PPG/reload timer/clock timer/ICU)
- Port 3 : General purpose I/O port, shared with peripheral functions (LCD)
- Port 4 : General purpose I/O port, shared with peripheral functions (LCD)
- Port 5 : General purpose I/O port, shared with peripheral functions (External interrupt/CAN/SG)
- Port 6 : General purpose I/O port, shared with peripheral functions (A/D converter)
- Port 7 : General purpose I/O port, shared with peripheral functions (Stepping motor controller)
- Port 8 : General purpose I/O port, shared with peripheral functions (Stepping motor controller)
- Port 9 : General purpose I/O port, shared with peripheral functions (LCD)

#### (1) List of Functions

Port	Pin name	Input format	Output format	Function	bit15	bit14	bit13	bit12
Port 0	P00/SIN0/INT4 to P07/PPG1	CMOS (hysteresis) (Automotive level*)	CMOS	General purpose I/O port	—	—	—	—
				Peripheral function	—	—	—	—
Port 1	P10/PPG2 to P15/IN0			General purpose I/O port	—	—	P15	P14
				Peripheral function	—	—	IN0	IN1
Port 3	P36/SEG12 to P37/SEG13			General purpose I/O port	P37	P36	—	—
				Peripheral function	SEG13	SEG12	—	—
Port 4	P40/SEG14 to P47/SEG21			General purpose I/O port	—	—	—	—
				Peripheral function	—	—	—	—
Port 5	P50/INT0 to P57/SGA			General purpose I/O port	P57	P56	P55	P54
				Peripheral function	SGA	SGO	RX0	TX0
Port 6	P60/AN0 to P67/AN7	Analog CMOS (hysteresis) (Automotive level*)	—	FRCK	—	—		
		General purpose I/O port	—	—	—	—		
Port 7	P70/PWM1P0 to P77/PWM2M1	CMOS (hysteresis) (Automotive level*)	General purpose I/O port	P77	P76	P75	P74	
			Peripheral function	PWM2M1	PWM2P1	PWM1M <sub>1</sub>	PWM1P1	
Port 8	P80/PWM1P2 to P87/PWM2M3		General purpose I/O port	—	—	—	—	
			Peripheral function	—	—	—	—	
Port 9	P90/SEG22 to P91/SEG23		General purpose I/O port	—	—	—	—	
			Peripheral function	—	—	—	—	

\*: Range of input voltage.

For ratings see "3. DC Characteristics" in "■ ELECTRICAL CHARACTERISTICS".



# MB90420G/425G Series

(Continued)



Port	bit11	bit10	bit9	bit8	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0
Port 0	—	—	—	—	P07	P06	P05	P04	P03	P02	P01	P00
	—	—	—	—	PPG1	PPG0	SCK1	SOT1	SIN1	SCK0	SOT0	SIN0
	—	—	—	—	TIN1	TOT1	—	—	INT7	INT6	INT5	INT4
Port 1	P13	P12	P11	P10	—	—	—	—	—	—	—	—
	IN2	IN3	WOT	PPG2	—	—	—	—	—	—	—	—
	—	TIN0	TOT0	—	—	—	—	—	—	—	—	—
Port 3	—	—	—	—	—	—	—	—	—	—	—	—
	—	—	—	—	—	—	—	—	—	—	—	—
Port 4	—	—	—	—	P47	P46	P45	P44	P43	P42	P41	P40
	—	—	—	—	SEG21	SEG20	SEG19	SEG18	SEG17	SEG16	SEG15	SEG14
Port 5	P53	P52	P51	P50	—	—	—	—	—	—	—	—
	INT3	INT2	INT1	INT0	—	—	—	—	—	—	—	—
	—	TX1	RX1	—	—	—	—	—	—	—	—	—
Port 6	—	—	—	—	P67	P66	P65	P64	P63	P62	P61	P60
	—	—	—	—	AN7	AN6	AN5	AN4	AN3	AN2	AN1	AN0
Port 7	P73	P72	P71	P70	—	—	—	—	—	—	—	—
	PWM2M0	PWM2P0	PWM1M0	PWM1P0	—	—	—	—	—	—	—	—
Port 8	—	—	—	—	P87	P86	P85	P84	P83	P82	P81	P80
	—	—	—	—	PWM2M3	PWM2P3	PWM1M3	PWM1P3	PWM2M2	PWM2P2	PWM1M2	PWM1P2
Port 9	—	—	P91	P90	—	—	—	—	—	—	—	—
	—	—	SEG23	SEG22	—	—	—	—	—	—	—	—

Note : Port 6 also functions as an analog input pin. When using this port as a general purpose port, always write “0” to the corresponding analog input enable register (ADER) bit. The ADER bit is initialized to “1” at reset.



# MB90420G/425G Series

## (2) Block Diagrams

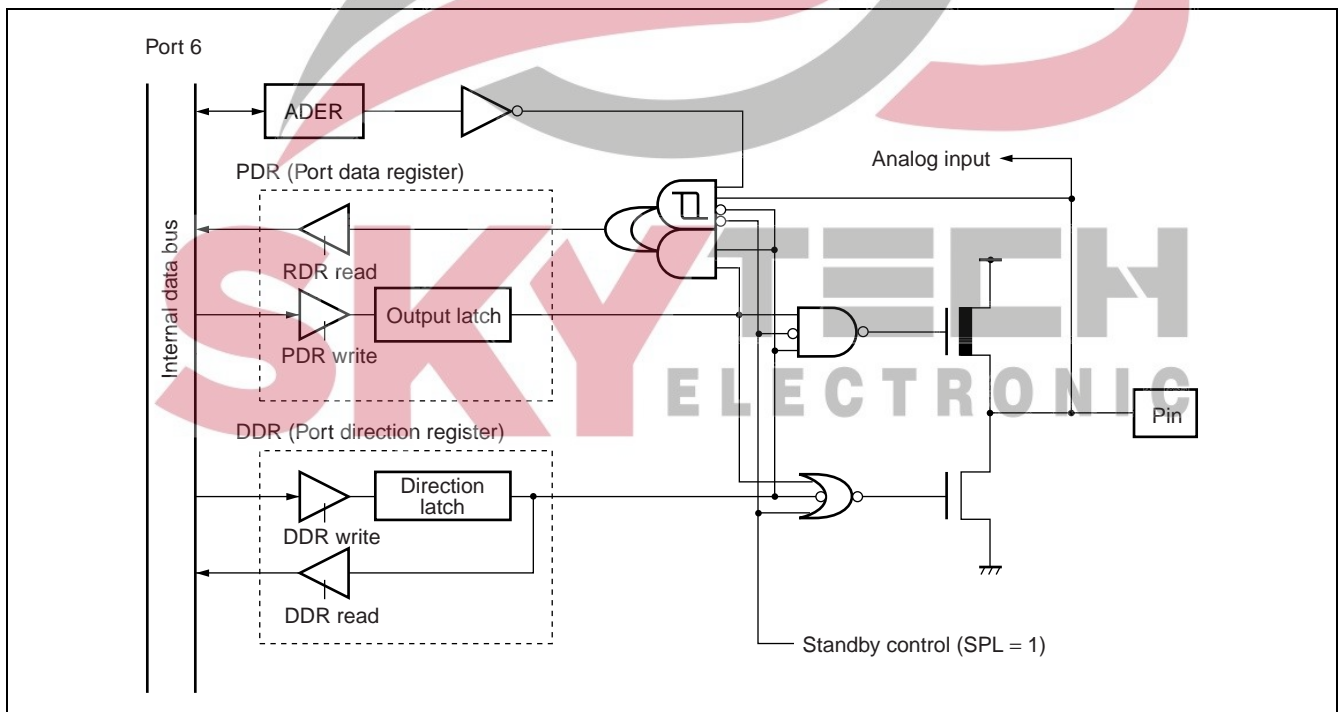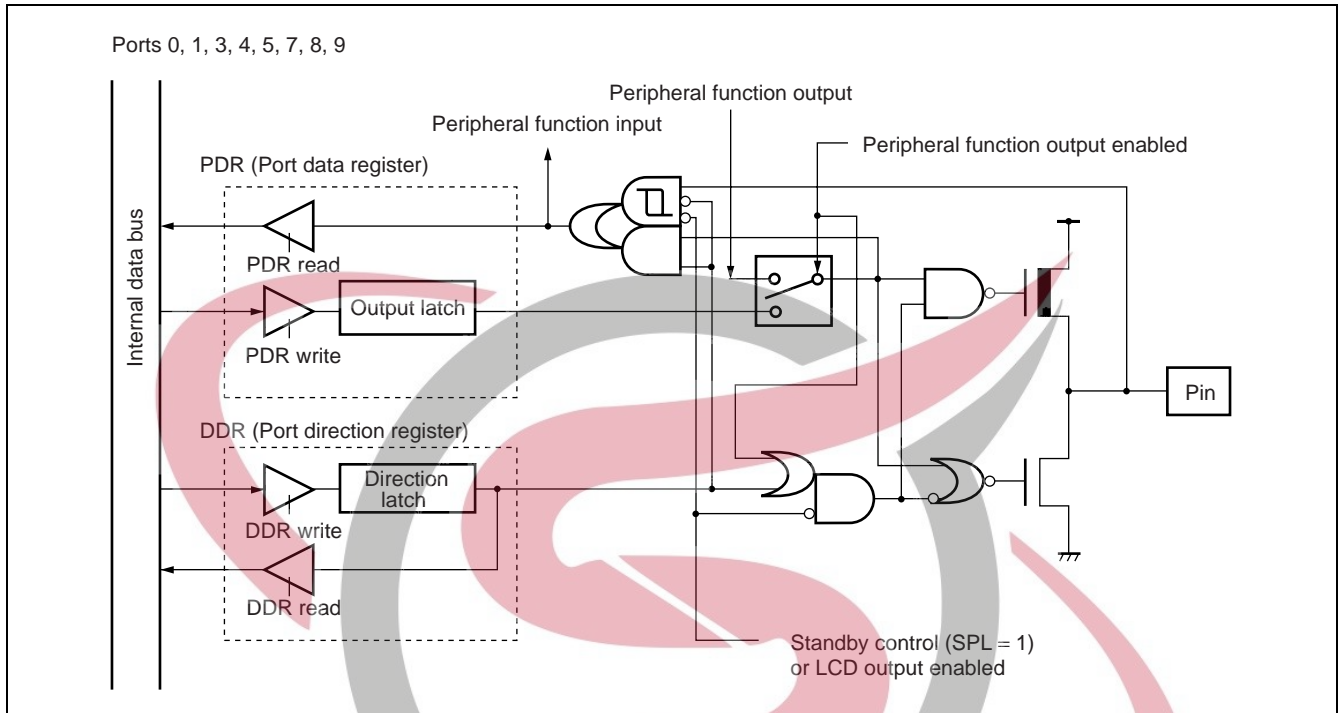

## 2. Watchdog Timer/Time Base Timer/Clock Timer

The watchdog timer, timer base timer, and clock timer have the following circuit configuration.

- Watchdog timer : Watchdog counter, control register, watchdog reset circuit
- Time base timer : 18-bit timer, interval interrupt control circuit
- Clock timer : 15-bit timer, interval interrupt control circuit

### (1) Watchdog timer function

The watchdog timer is composed of a 2-bit watchdog counter that uses the carry signal from the 18-bit time base timer or 15-bit clock timer as a clock source, plus a control register and watchdog reset control circuit.

After startup, this function will reset the CPU if not cleared within a given time.

### (2) Time base timer function

The time base timer is an 18-bit free-run counter (time base counter) synchronized with the internal count clock (base oscillator divided by 2), with an interval timer function providing a selection of four interval times. Other functions include a timer output for an oscillator stabilization wait time and clock feed to the watchdog timer or other operating clocks. Note that the time base timer uses the main clock regardless of the setting of the MCS bit or SCS bit in the CKSCR register.


### (3) Clock timer function

The clock timer provides functions including a clock source for the watchdog timer, a sub clock base oscillator stabilization wait timer, and an interval timer to generate an interrupt at fixed intervals. Note that the clock timer uses the sub clock regardless of the setting of the MCS bit or SCS bit in the CKSCR register.



# MB90420G/425G Series

• Block Diagram

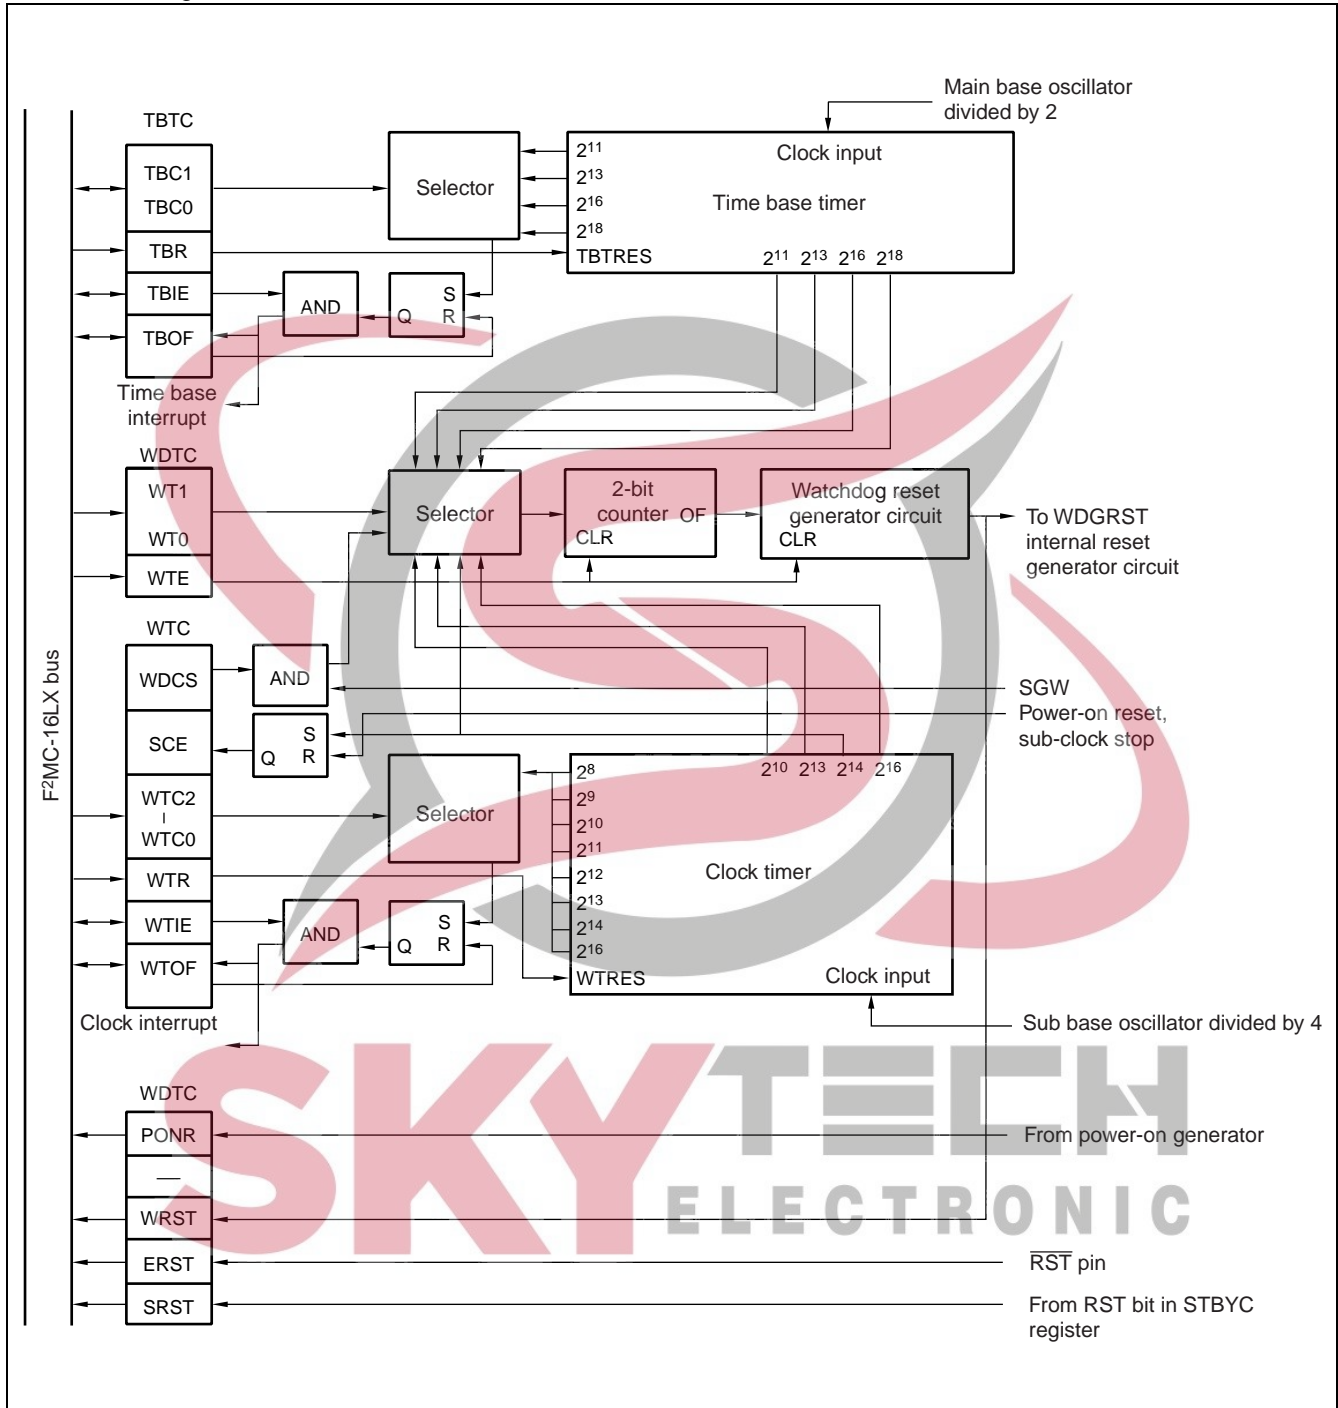

## 3. Input Capture

This circuit is composed of a 16-bit free-run timer and four 16-bit input capture circuits.

### (1) Input capture (× 4)

The input capture circuits consist of four independent external input pins and corresponding capture registers and control registers. When the specified edge of the external signal input (at the input pin) is detected, the value of the 16-bit free-run timer is saved in the capture register, and at the same time an interrupt can also be generated.


- The valid edge (rising edge, falling edge, both edges) of the external signal can be selected.
- The four input capture circuits can operate independently.
- The interrupt can be generated from the valid edge of the external input signal.

### (2) 16-bit free-run timer (× 1)

The 16-bit free-run timer is composed of a 16-bit up-counter, control register, 16-bit compare register, and prescaler. The output values from this counter are used as the base time for the input capture circuits.

- The counter clock operation can be selected from 8 options. The eight internal clock settings are  $\phi$ ,  $\phi/2$ ,  $\phi/4$ ,  $\phi/8$ ,  $\phi/16$ ,  $\phi/32$ ,  $\phi/64$ ,  $\phi/128$  where  $\phi$  represents the machine clock cycle.
- Interrupts can be generated from overflow events, or from compare match events with the compare register. (Compare match operation requires a mode setting.)
- The counter value can be initialized to "0000H" by a reset, soft clear, or a compare match with the compare register.

### (3) Block diagram

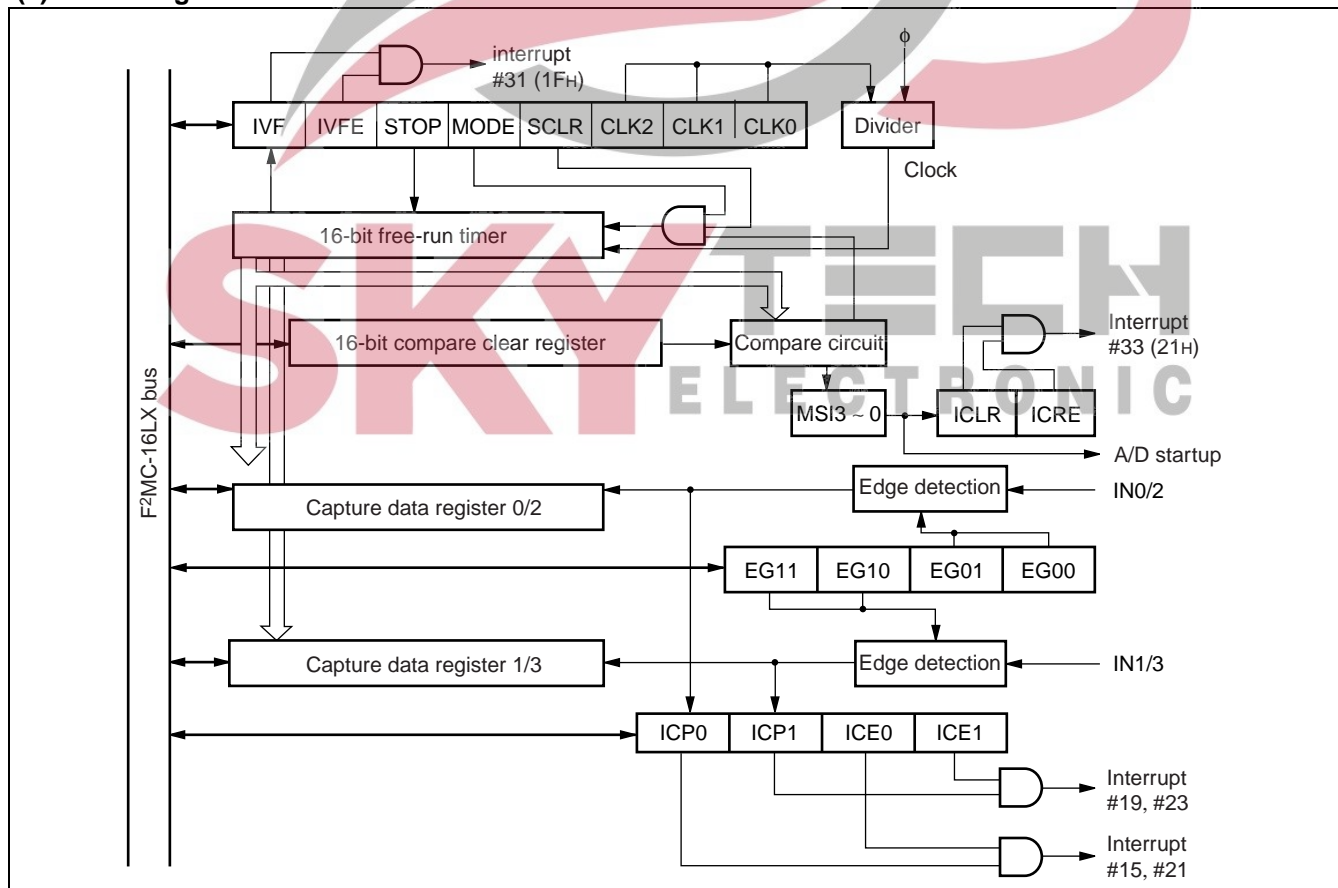



# MB90420G/425G Series

## 4. 16-bit Reload Timer

The 16-bit reload timer can either count down in synchronization with three types of internal clock signals in internal clock mode, or count down at the detection of the designated edge of an external signal. The user may select either function. This timer defines a transition from 0000<sub>H</sub> to FFFF<sub>H</sub> as an underflow event. Thus an underflow occurs when counting from the value [Reload register setting + 1].

A selection of two counter operating modes are available. In reload mode, the counter is reset to the count value and continues counting after an underflow, and in one-shot mode the count stops after an underflow. The counter can generate an interrupt when an underflow occurs, and is compatible with the expanded intelligent I/O services (EI<sup>2</sup>OS) .

### (1) 16-bit Reload timer operating modes

Clock mode	Counter mode	16-bit reload timer operation
Internal clock mode	Reload mode	Soft trigger operation
	One-shot mode	External trigger operation External gate input operation
Event count mode (external clock mode)	Reload mode	Soft trigger operation
	One-shot mode	

### (2) Internal clock mode

One of three input clocks is selected as the count clock, and can be used in one of the following operations.

- Soft trigger operation  
When “1” is written to the TRG bit in the timer control status register (TMCSR0/1) , the count operation starts. Trigger input at the TRG bit is normally valid with an external trigger input, as well as an external gate input.
- External trigger operation  
Count operation starts when a selected edge (rising, falling, both edges) is input at the TIN0/1 pin.
- External gate input operation  
Counting continues as long as the selected signal level (“L” or “H”) is input at the TIN0/1 pin.

### (3) Event count mode (External clock mode)

In this mode a down count event occurs when a selected valid edge (rising, falling, both edges) is input at the TIN0/1 pin. This function can also be used as an interval timer when an external clock with a fixed period is used.

### (4) Counter operation

- Reload mode

In down count operation, when an underflow event (transition from “0000<sub>H</sub>” to “FFFF<sub>H</sub>”) occurs, the set count value is reloaded and count operation continues. The function can be used as an interval timer by generating an interrupt request at each underflow event. Also, a toggle waveform that inverts at each underflow can be output from the TOT0/1 pin.


Counter clock	Counter clock period	Interval time
Internal clock	$2^1/\phi$ (0.125 $\mu$ s)	0.125 $\mu$ s to 8.192 ms
	$2^3/\phi$ (0.5 $\mu$ s)	0.5 $\mu$ s to 32.768 ms
	$2^5/\phi$ (2.0 $\mu$ s)	2.0 $\mu$ s to 131.1 ms
External clock	$2^3/\phi$ or greater (0.5 $\mu$ s)	0.5 $\mu$ s or greater

$\phi$  : Machine clock cycle. Figures in ( ) are values at machine clock frequency 16 MHz.

## (5) One-shot mode

In down count operation, the count stops when an underflow event (transition from "0000H" to "FFFFH") occurs. This function can generate an interrupt at each underflow. While the counter is operating, a rectangular wave form indicating that the count is in progress can be output from the TOT0 and TOT1 pins.

## (6) Block diagram


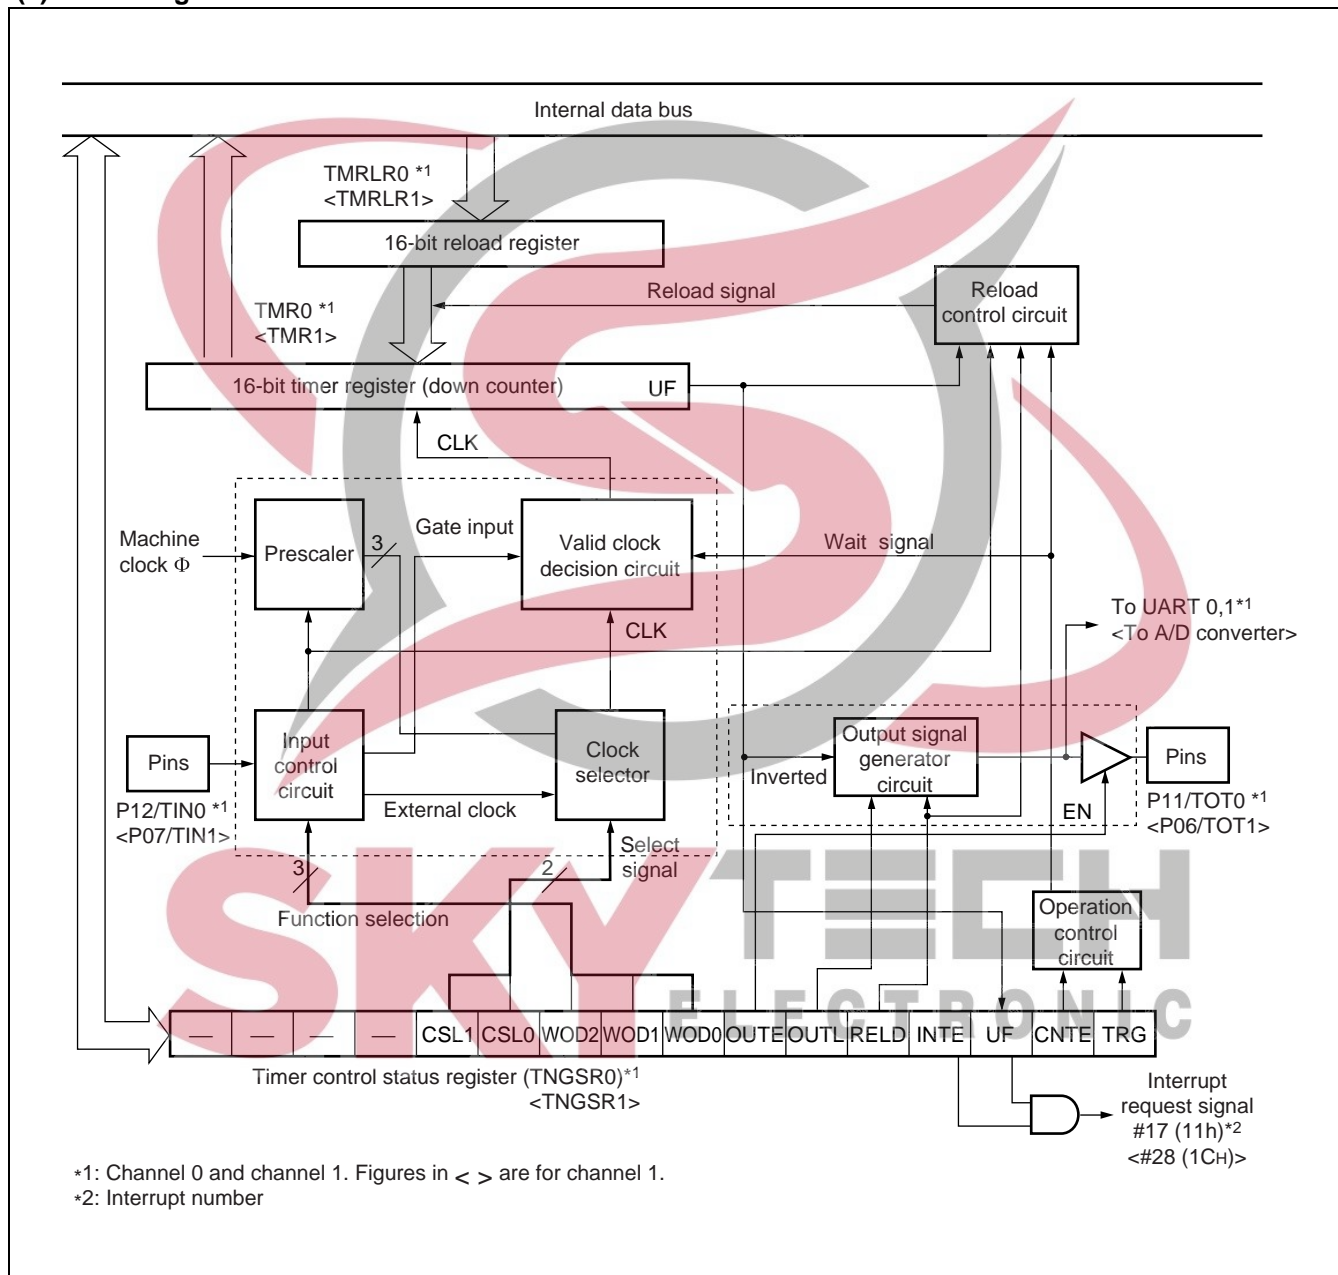


# MB90420G/425G Series

## 5. Real Time Clock Timer

The real time clock timer is composed of a real time clock timer control register, sub second data register, second/minute/hour data registers, 1/2 clock divider, 21-bit prescaler and second/minute/hour counters. Because the MCU oscillation frequency operates on a given real time clock timer operation, a 4 MHz frequency is assumed. The real time clock timer operates as a real world timer and provides real world time information.

- Block diagram

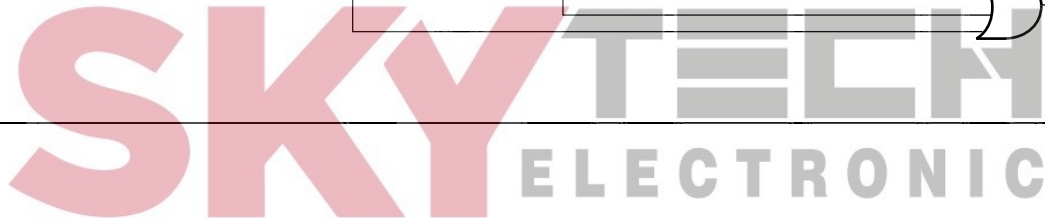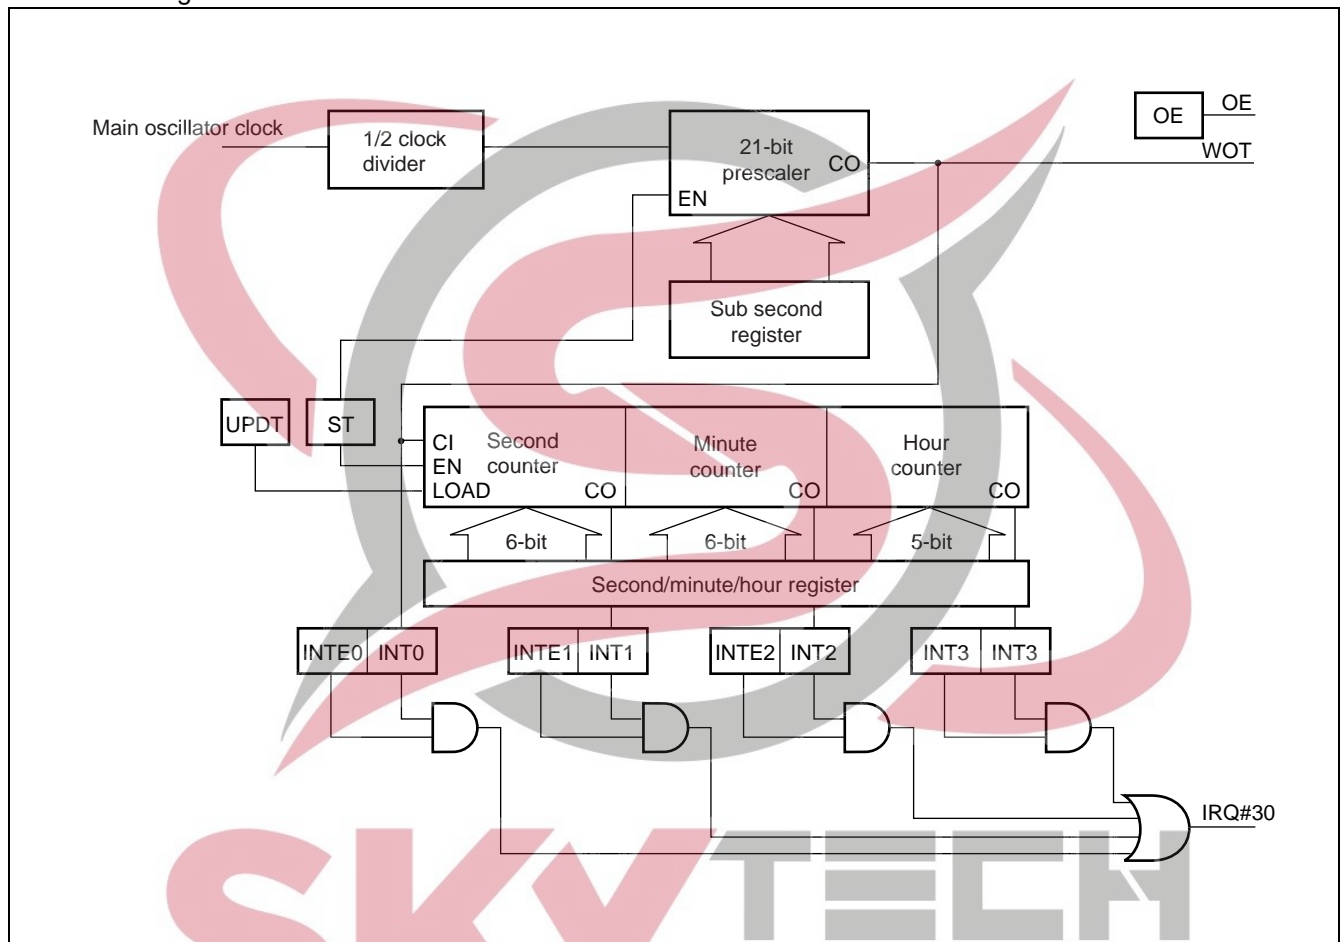

## 6. PPG Timer

The PPG timer consists of a prescaler, one 16-bit down-counter, 16-bit data register with buffer for period setting, and 16-bit compare register with buffer for duty setting, plus pin control circuits.

The timer can output pulses synchronized with an externally input soft trigger. The period and duty of the output pulse can be adjusted by rewriting the values in the two 16-bit registers.

### (1) PWM function

Programmable to output a pulse, synchronized with a trigger.

Can also be used as a D/A converter with an external circuit.

### (2) One-shot function

Detects the edge of a trigger input, and outputs a single pulse.

### (3) Pin control

- Set to "1" at a duty match (priority) .
- Reset to "0" at a counter borrow event
- Has a fixed output mode to output a simple all "L" ( or "H" ) signal.
- Polarity can be specified

### (4) 16-bit down counter

- Select from four types of counter operation clocks. Four internal clocks ( $\phi$ ,  $\phi/4$ ,  $\phi/16$ ,  $\phi/64$ )  $\phi$  : Machine clock cycles.
- The counter value can be initialized to "FFFFH" at a reset or counter borrow event.

### (5) Interrupt requests


- Timer startup
- Counter borrow event (period match)
- Duty match event
- Counter borrow event (period match) or duty match event

### (6) Multiple channels can be set to start up at an external trigger, or to restart during operation.

**SKYTECH**  
ELECTRONIC

# MB90420G/425G Series

(7) Block diagram

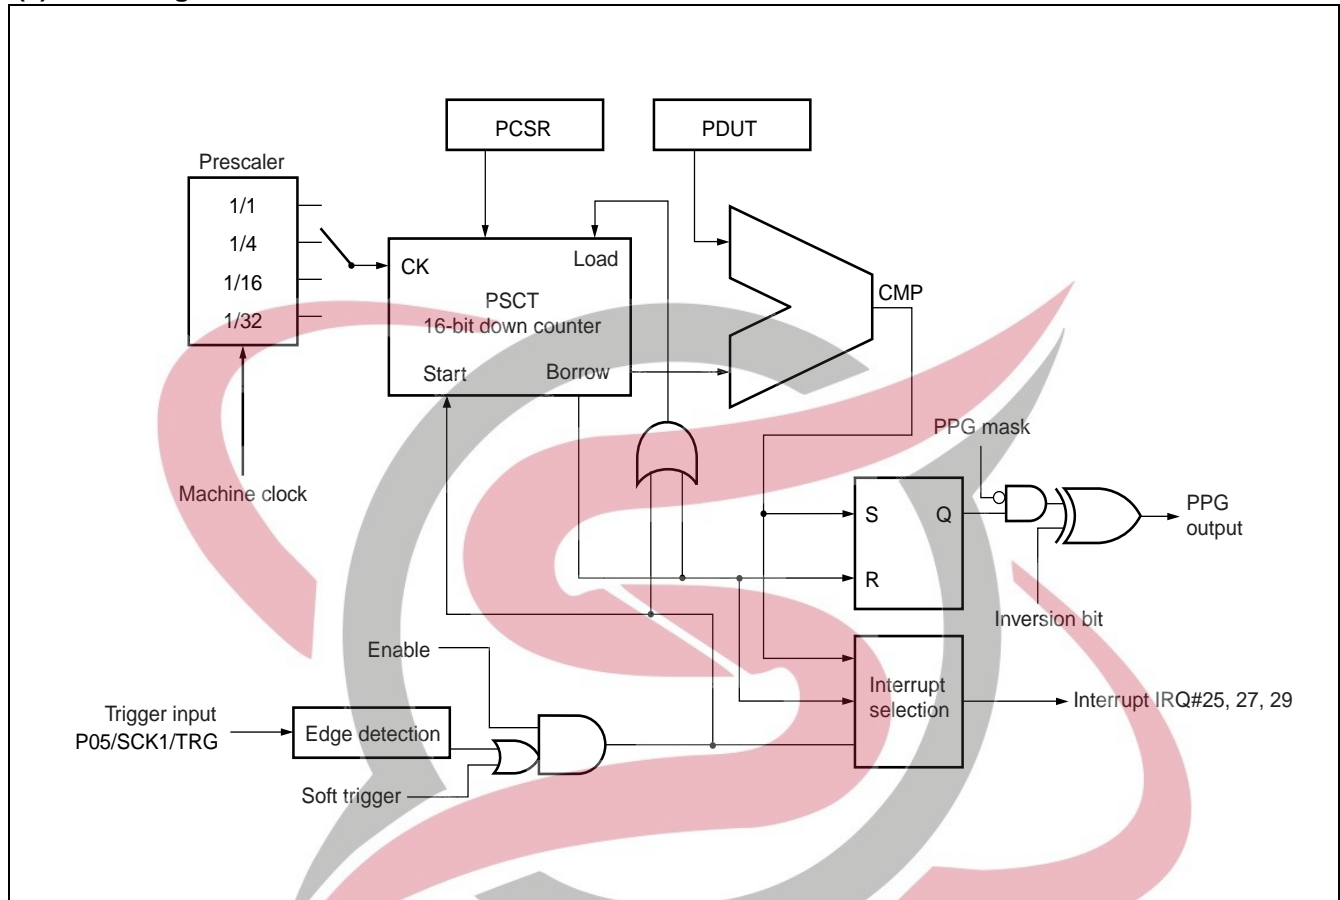


**SKY**TECH  
ELECTRONIC



## 7. Delayed Interrupt Generator Module

The delayed interrupt generator module is a module that generates interrupts for task switching. This module makes it possible to use software to generate/cancel interrupt requests to the F<sup>2</sup>MC-16LX CPU.

- Block diagram

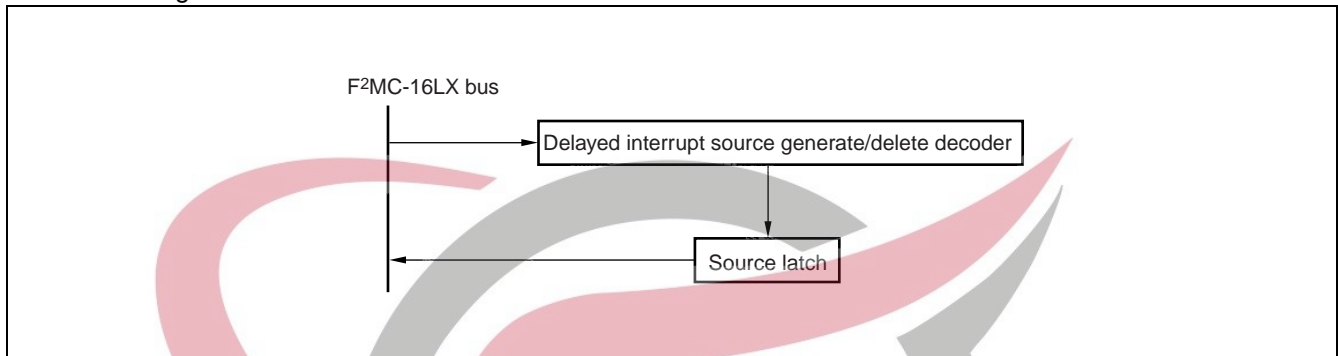

**SKY**TECH  
ELECTRONIC

# MB90420G/425G Series

## 8. DTP/External Interrupt Circuit

The DTP (Data transfer peripheral) /external interrupt circuit is located between an externally connected peripheral device and the F<sup>2</sup>MC-16LX CPU and sends interrupt requests or data transfer requests generated from the peripheral device to the CPU, thereby generating external interrupt requests or starting the expanded intelligent I/O services (EI<sup>2</sup>OS) .

### (1) DTP/external interrupt function

The DTP/external interrupt function uses a signal input from the DTP/external interrupt pin as a startup source. And it is accepted by the CPU by the same procedure as a normal hardware interrupt, and can generate an external interrupt or start the expanded intelligent I/O service (EI<sup>2</sup>OS) .


When the interrupt is accepted by the CPU, if the corresponding expanded intelligent I/O service (EI<sup>2</sup>OS) is prohibited the interrupt operates as an external interrupt function and branches to an interrupt routine. If the EI<sup>2</sup>OS is permitted the interrupt functions as a DTP function, using EI<sup>2</sup>OS for automatic data transfer, then branching to an interrupt routine after the completion of the specified number of data transfers.

	External interrupt	DTP function
Input pins	8 pins (P50/INT0/ADTG to P53/INT3, P00/SIN0/INT4 to P03/INT7)	
Interrupt sources	Request level setting register (ELVR) sets the detection level, or selected edge for each pin	
	"H" level/ "L" level/ rising edge/falling edge input	"H" level/ "L" level input
Interrupt numbers	#16 (10H) , #18 (12H) , #20 (14H) , #22 (16H) , #24 (18H) , #26 (1AH)	
Interrupt control	DTP/interrupt enable register (ENIR) permits/prohibits interrupt request output	
Interrupt flags	DTP/interrupt enable register (EIRR) stores interrupt sources	
Process selection	When EI <sup>2</sup> OS prohibited (ICR : ISE = 0)	When EI <sup>2</sup> OS is enabled (ICR : ISE = 1)
Processing	Branch to external interrupt processing routine	EI <sup>2</sup> OS performs automatic data transfer, then after a specified number of cycles, branches to an interrupt routine

ICR : Interrupt control register



## (2) Block diagram

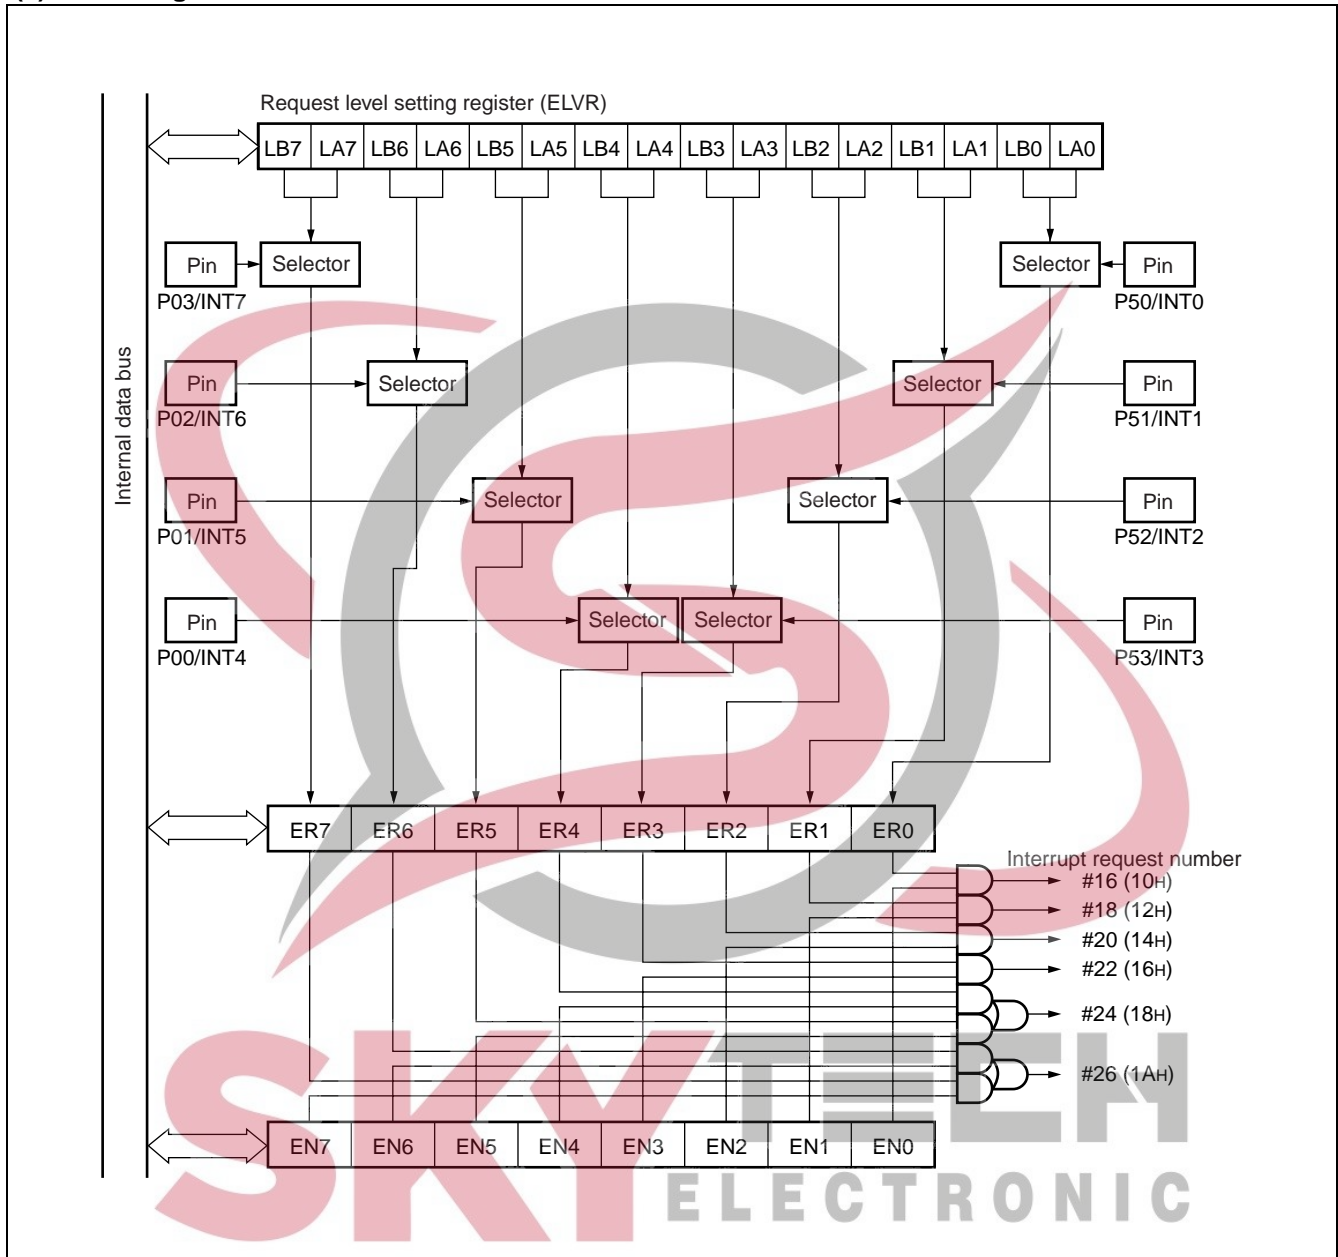

# MB90420G/425G Series

## 9. 8/10-bit A/D Converter

The 8/10-bit A/D converter has functions for using RC sequential comparator conversion format to convert analog input voltage into 10-bit or 8-bit digital values. The input signal is selected from 8-channel analog input pins, and the conversion start can be selected from three types : by software, 16-bit reload timer 1 or a trigger input from an external signal pin.

### (1) 8/10-bit A/D converter functions


The A/D converter takes analog voltage signals (input voltage) input at analog input pins, and converts these to digital values, providing the following features.

- Minimum conversion time is 6.13  $\mu$ s (at machine clock frequency of 16 MHz, including sampling time) .
- Minimum sampling time is 3.75  $\mu$ s (at machine clock 16 MHz)
- The conversion method is an RC sequential conversion in comparison with a sample hold circuit.
- Either 10-bit or 8-bit resolution can be selected.
- The analog input pin can select from 8 channels by a program setting.
- At completion of A/D conversion, an interrupt request can be generated, or EI<sup>2</sup>OS can be started.
- Because the conversion data protection function operates in an interrupt enabled state, no data is lost even in continuous conversion.
- The conversion start source may be selected from : software, 16-bit reload timer 1 (rising edge) , or external trigger input (falling edge) .

Three conversion modes are available

Conversion mode	Single conversion operation	Scan conversion operation
Single conversion mode	Converts the specified channel (1 channel only) one time, then stops.	Converts multiple consecutive channels (up to 8 channels may be specified) one time, then stops.
Continuous conversion mode	Converts the specified channel (1 channel only) repeatedly.	Converts multiple consecutive channels (up to 8 channels may be specified) repeatedly.
Stop conversion mode	Converts the specified channel (1 channel only) one time, then pauses, waits until the next start is applied.	Converts multiple consecutive channels (up to 8 channels may be specified) , however pauses after conversion of each channel, waits until the next start is applied.

## (2) Block diagram

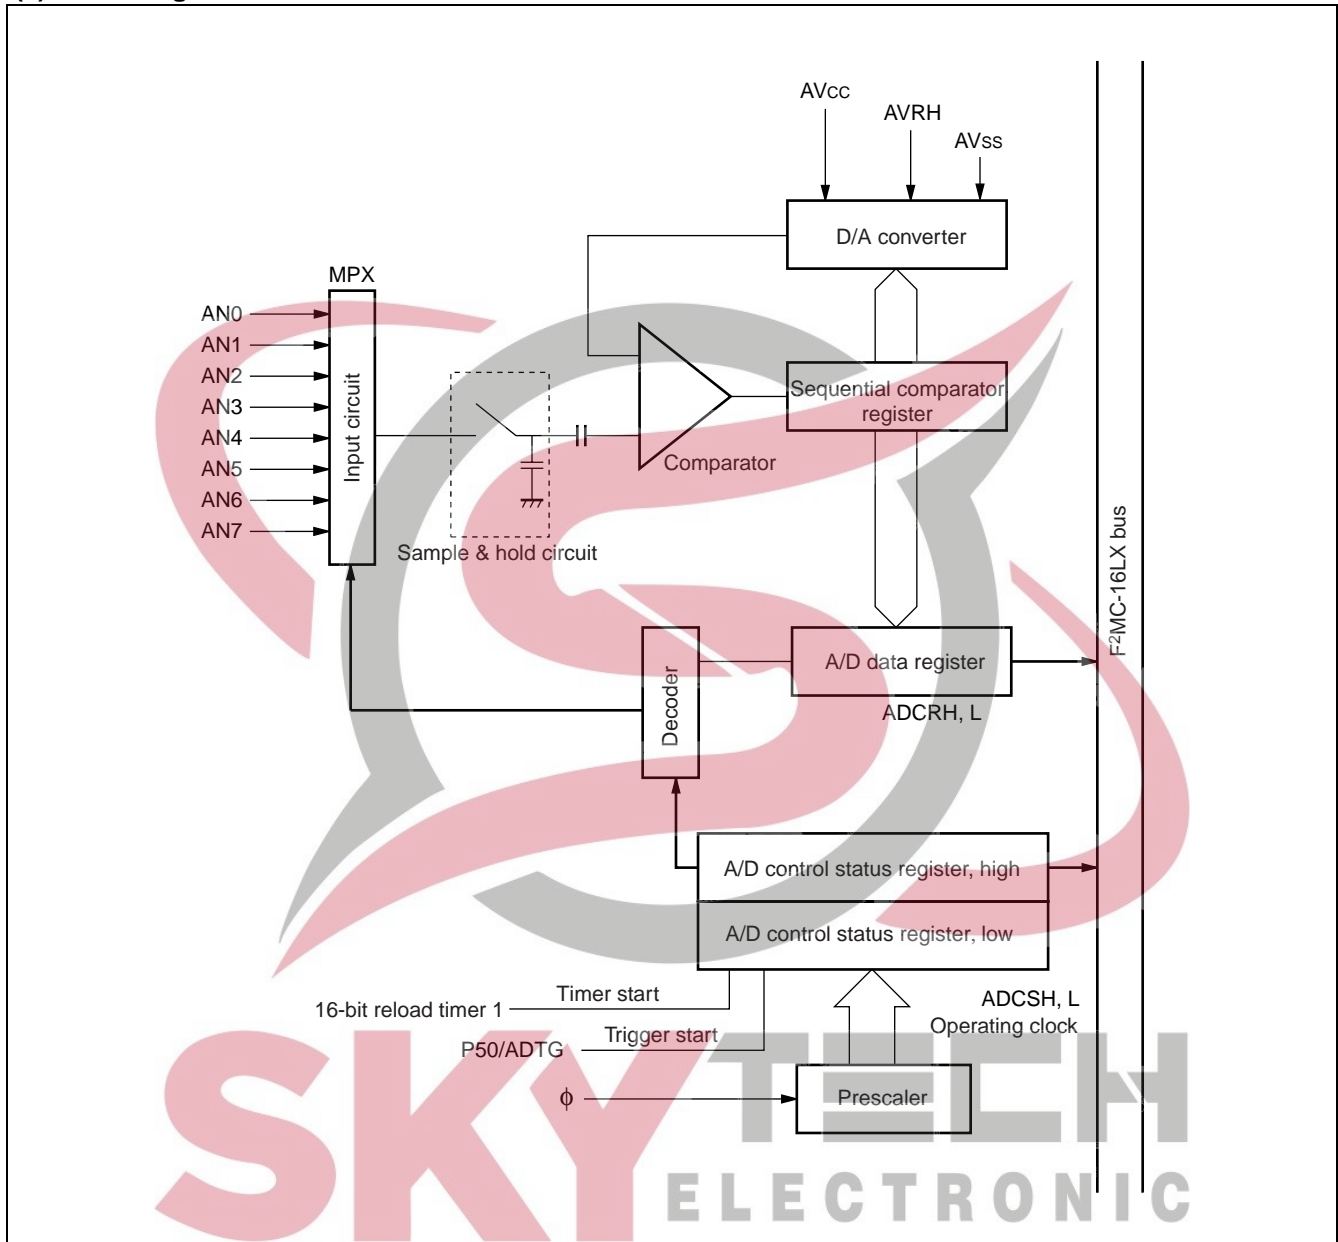



# MB90420G/425G Series

## 10. UART

The UART is a general purpose serial data communication interface for synchronous communication, or asynchronous (start-stop synchronized) communication with external devices. Functions include normal bi-directional functions, as well as master/slave type communication functions (multi-processor mode : master side only supported) .

### (1) UART Functions

The UART is a general purpose serial data communication interface for sending and receiving of serial data with other CPU's or peripheral devices, and provides the following functions.

	Functions
Data buffer	Full duplex double buffer
Transfer modes	<ul style="list-style-type: none"> <li>• Clock synchronous (no start/stop bits)</li> <li>• Clock asynchronous (start-stop synchronized)</li> </ul>
Baud rate	<ul style="list-style-type: none"> <li>• Exclusive baud rate generator provides a selection of 8 rates</li> <li>• External clock input enabled</li> <li>• Internal clock (can use internal clock feed from 16-bit reload timer)</li> </ul>
Data length	<ul style="list-style-type: none"> <li>• 7-bit (asynchronous normal mode only)</li> <li>• 8-bit</li> </ul>
Signal type	NRZ (Non return to zero)
Receiving error detection	<ul style="list-style-type: none"> <li>• Framing errors</li> <li>• Overrun errors</li> <li>• Parity errors (not enabled in multiprocessor mode)</li> </ul>
Interrupt request	<ul style="list-style-type: none"> <li>• Receiving interrupt (receiving completed, receiving error detection)</li> <li>• Sending interrupt (sending completed)</li> <li>• Sending/receiving both compatible with expanded intelligent I/O services (EI<sup>2</sup>OS)</li> </ul>
Master/slave type communication function (multi-processor mode)	1 (master) -to-n (slave) communication enabled (only master side supported) .

Note : The UART in clock synchronous transfer does not add start bits or stop bits, but transfers data only.


Operating mode	Data length		Synchronization	Stop bit length
	No parity	Parity		
0 Normal mode	7-bit or 8-bit		Asynchronous	1-bit or 2-bit *2
1 Multi-processor mode	8 + 1 *1	—	Asynchronous	
2 Normal mode	8	—	Synchronous	None

— : Setting not available

\*1 : "+" indicates an address/data selection bit (A/D) for communication control.

\*2 : In receiving only one stop bit is detected.

## (2) Block diagram

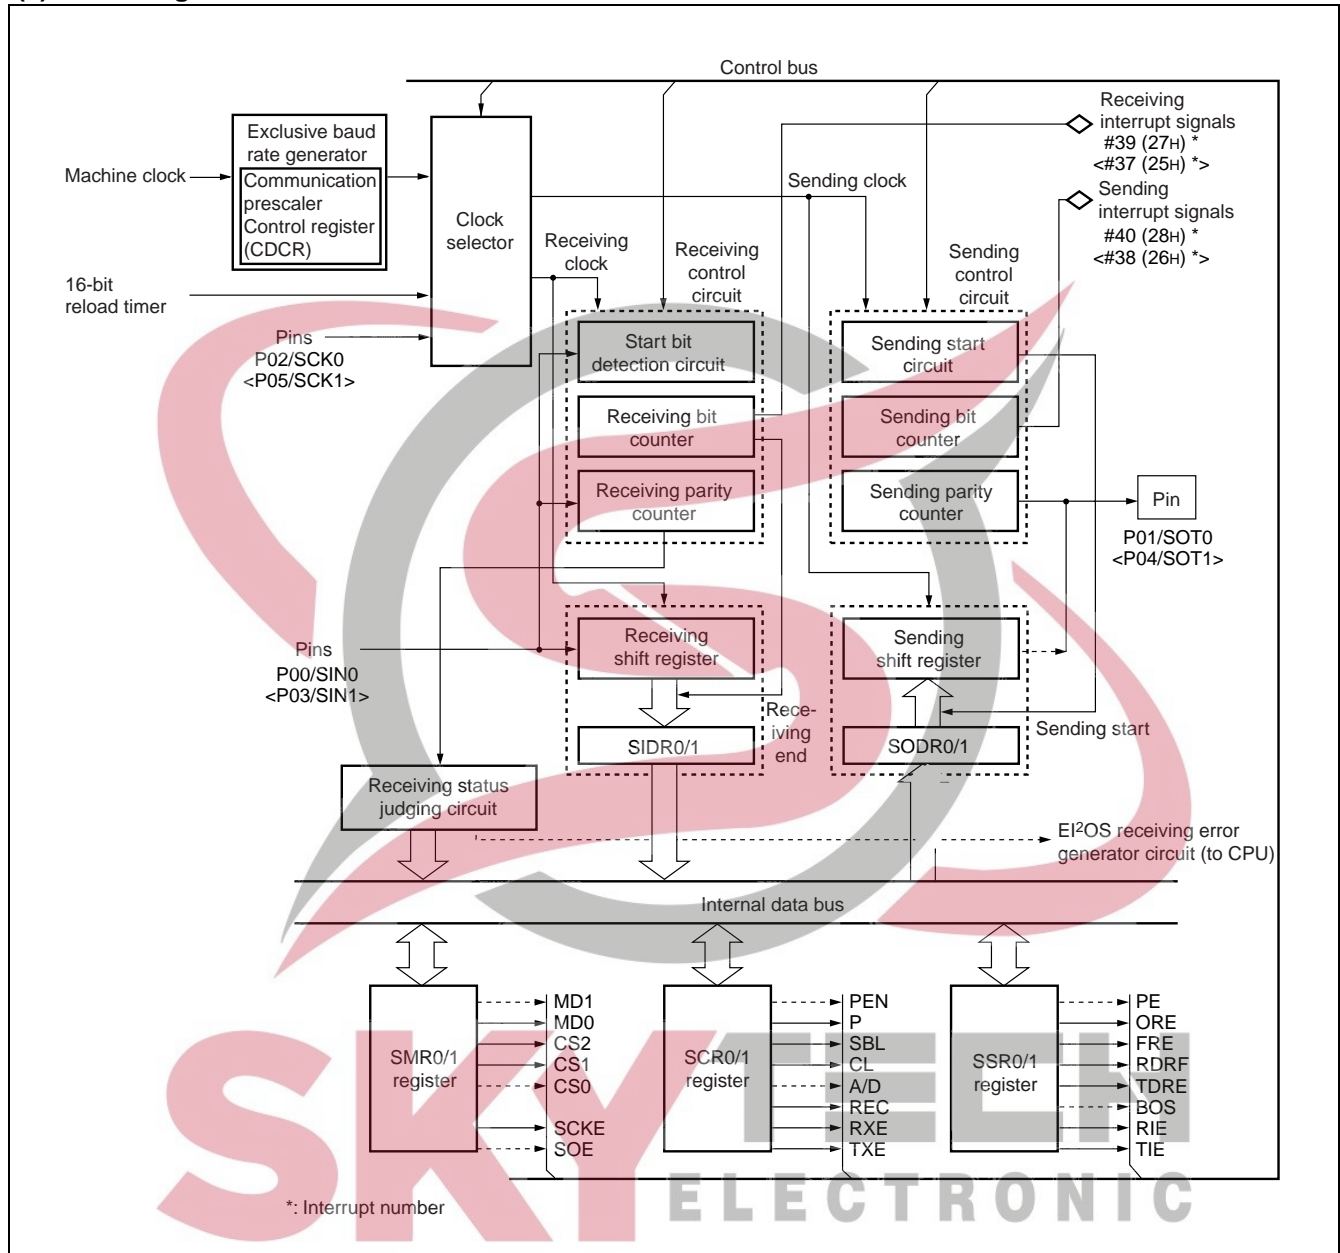

## 11. CAN Controller

The CAN controller is a self-contained module within a 16-bit microcomputer (F<sup>2</sup>MC-16LX) . The CAN (controller area network) controller is the standard protocol for serial transmissions among automotive controllers and is widely used in the industry.


### (1) CAN controller features

The CAN controller has the following features.

- Conforms to CAN specifications version 2.0 A and B.
  - Supports sending and receiving in standard frame and expanded frame format.
- Supports data frame sending by means of remote frame receiving.
- 16 sending/receiving message buffers
  - 29-bit ID and 8-byte data
  - Multi-level message buffer configuration
- Supports full bit compare, full bit mask as well as partial bit mask filtering.
  - Provides two receiving mask registers for either standard frame or expanded frame format.
- Bit speed programmable from 10 KB/s to 1 MB/s (at machine clock 16 MHz)
- CAN WAKE UP function
- The MB90420G series has a two-channel built-in CAN controller. The MB90425G series has a 1-channel built-in CAN controller.



## (2) Block diagram

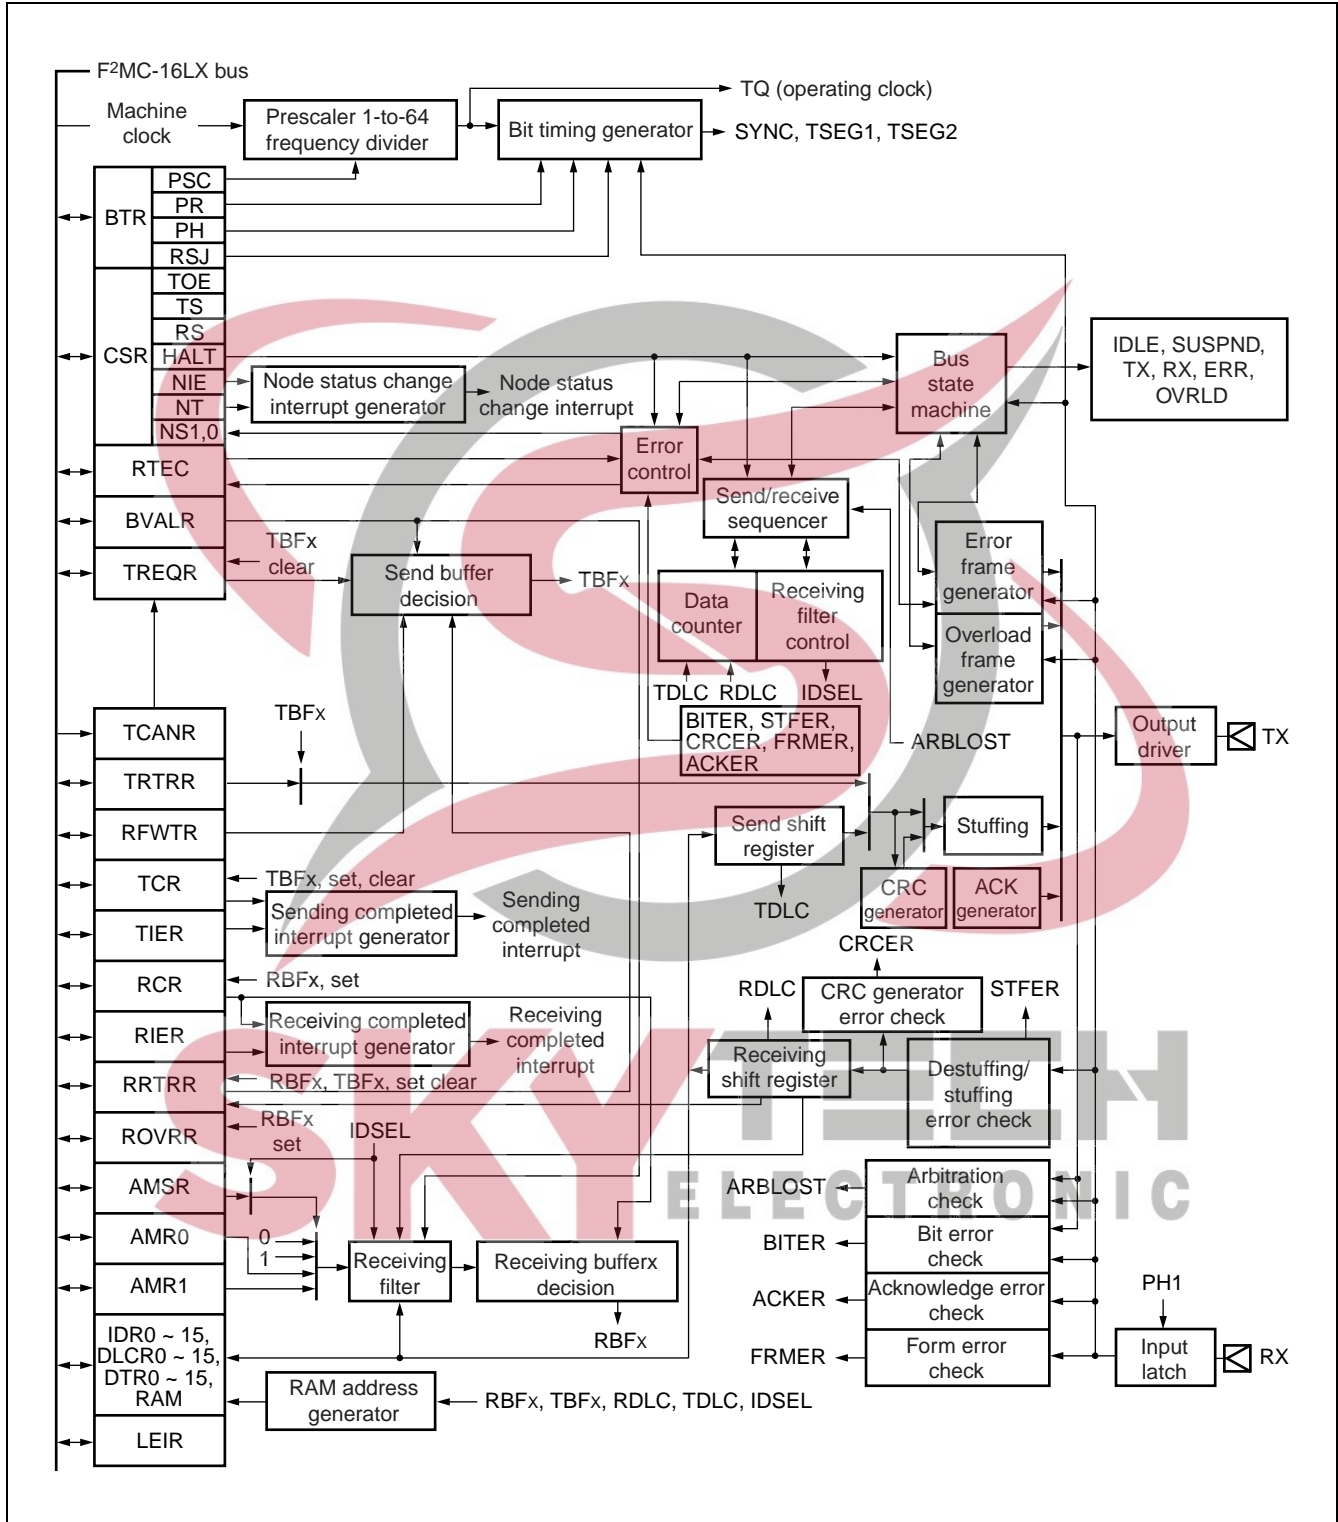

# MB90420G/425G Series

## 12. LCD Controller/Driver

The LCD controller/driver has a built-in  $16 \times 8$ -bit display data memory, and controls the LCD display by means of four common outputs and 24 segment outputs. A selection of three duty outputs are available. This block can drive an LCD (liquid crystal display) panel directly.

### (1) LCD controller/driver functions

The LCD controller/driver provides functions for directly displaying the contents of display data memory (display RAM) on the LCD panel by means of segment output and common output.

- LCD drive voltage divider resistance is built-in. External divider resistance can also be connected.
- Up to 4 common outputs (COM0 to COM3) and 24 segment outputs (SEG0 to SEG23) can be used.
- 16-byte display data memory (display RAM) is built-in.
- The duty can be selected at 1/2, 1/3, 1/4 (limited by bias setting) .
- Drives the LCD directly.

Bias	1/2 duty	1/3 duty	1/4 duty
1/2 bias	○	×	×
1/3 bias	×	○	○


○ : Recommended mode

× : Use prohibited

Note : When the SEG12 to SEG23 pins have been selected as general purpose ports by the LCRH setting, they cannot be used for segment output.



## (2) Block diagram

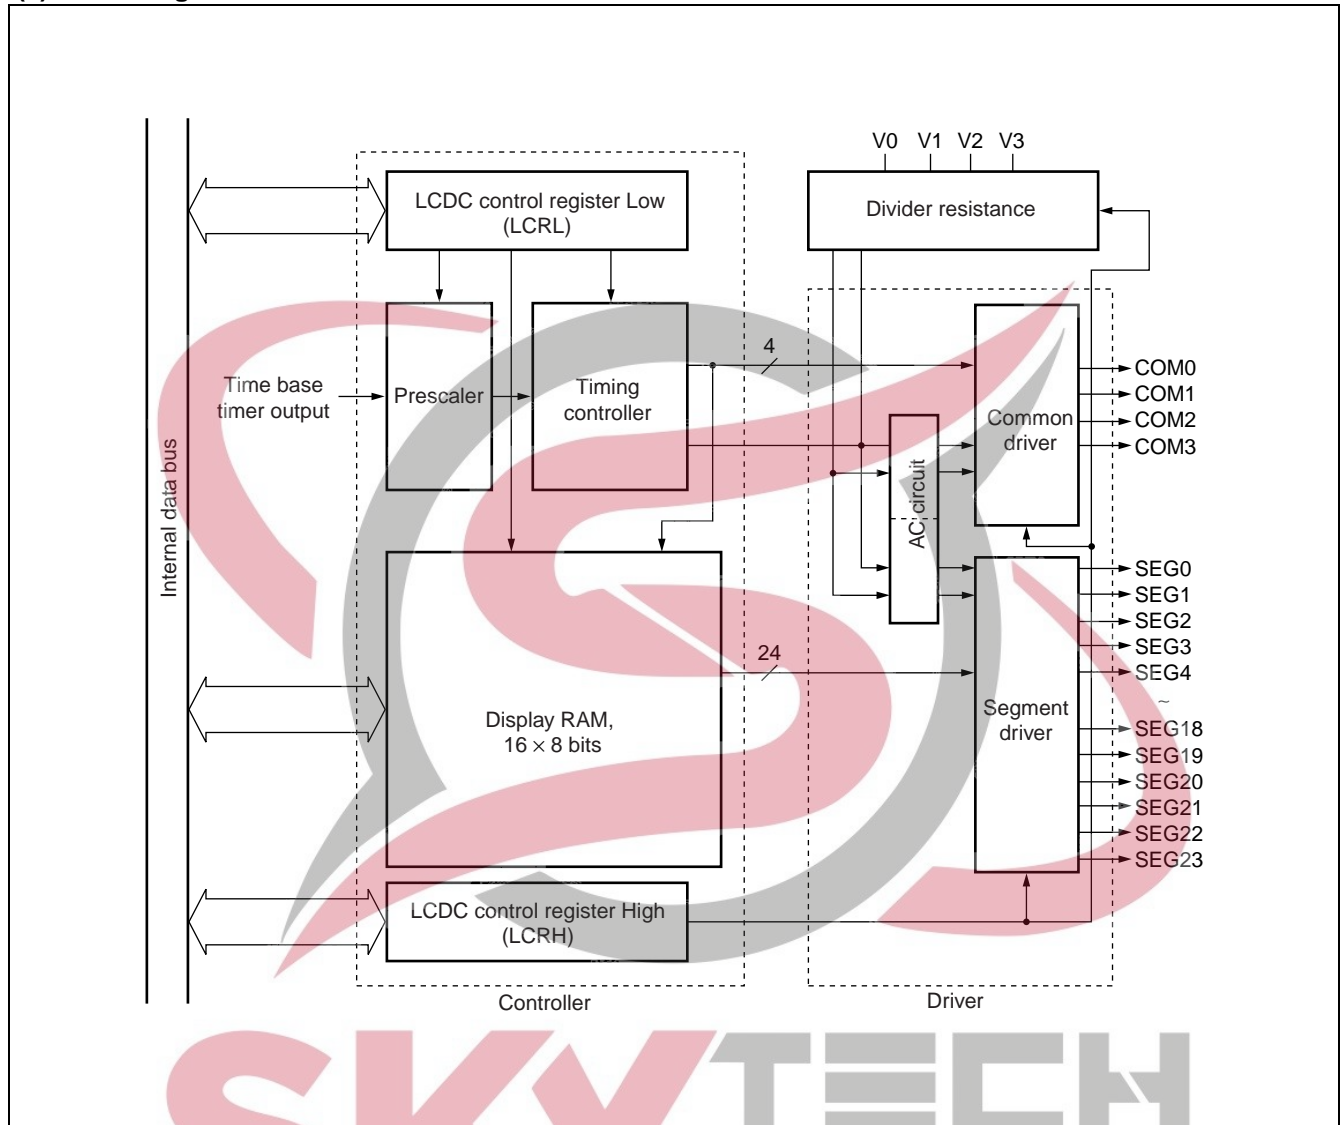

**SKYTECH**  
ELECTRONIC



## 13. Low voltage/Program Looping Detection Reset Circuit

The Low voltage detection reset circuit is a function that monitors power supply voltage in order to detect when a voltage drops below a given voltage level. When a low voltage condition is detected, an internal reset signal is generated.

The Program Looping detection reset circuit is a count clock with a 20-bit counter that generates an internal reset signal if not cleared within a given time after startup.

### (1) Low voltage detection reset circuit

<b>Detection voltage</b>
4.0 V $\pm$ 0.3 V

When a low voltage condition is detected, the low voltage detection flag (LVRC : LVRF) is set to "1" and an internal reset signal is output.

Because the low voltage detection circuit continues to operate even in stop mode, detection of a low voltage condition generates an internal reset and releases stop mode.

During an internal RAM write cycle, an internal reset is generated after the completion of writing. During the output of this internal reset, the reset output from the low voltage detection circuit is suppressed.

### (2) Program Looping detection reset circuit

The Program Looping detection reset circuit is a counter that prevents program looping. The counter starts automatically after a power-on reset, and must be continually cleared within a given time. If the given time interval elapses and the counter has not been cleared, a cause such as infinite program looping is assumed and an internal reset signal is generated. The internal reset generated from the Program Looping detection circuit has a width of 5 machine cycles.

<b>Interval duration</b>
$2^{20}/F_c$ (Approx. 262 ms *)

\* : This value assumes an oscillation clock waveform of 4 MHz.


During recovery from standby mode the detection period is the maximum interval plus 20  $\mu$ s.

This circuit does not operate in modes where CPU operation is stopped.

The Program Looping detection reset circuit counter is cleared under any of the following conditions.

1. Writing "0" to the LVRC register CL bit
2. Internal reset
3. Main oscillation clock stop
4. Transition to sleep mode
5. Transition to time base timer mode or clock mode

## (3) Block diagram

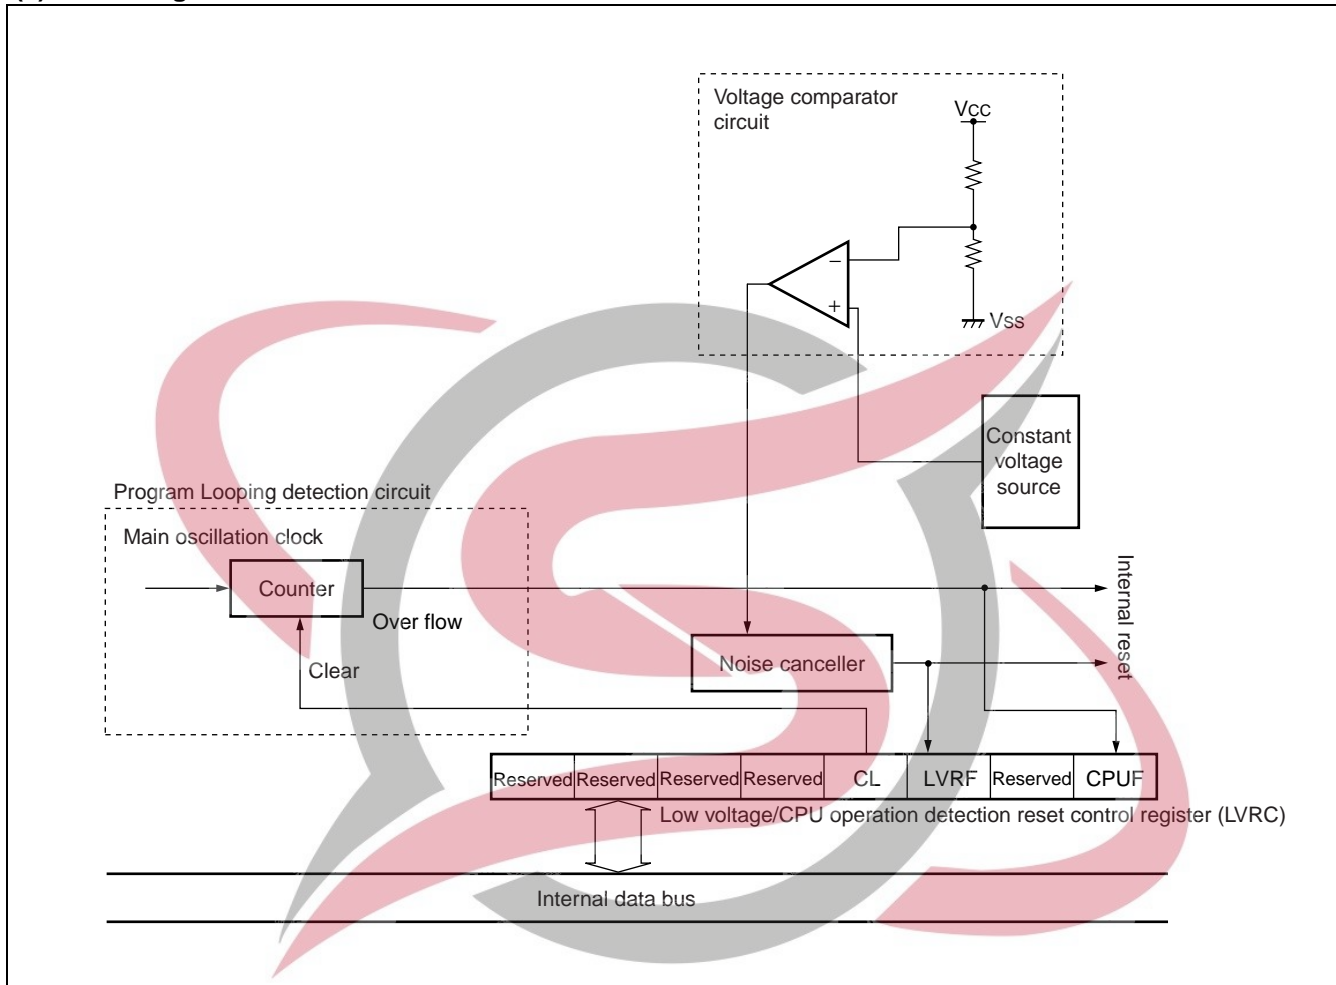

**SKY**TECH  
ELECTRONIC


# MB90420G/425G Series

## 14. Stepping Motor Controller

The stepping motor controller is composed of two PWM pulse generators, four motor drivers and selector logic circuits.

The four motor drivers have a high output drive capacity and can be directly connected to the four ends of two motor coils. They are designed to operate together with the PWM pulse generators and selector logic circuits to control motor rotation. A synchronization mechanism assures synchronization of the two PWM pulse generators.


• Block diagram

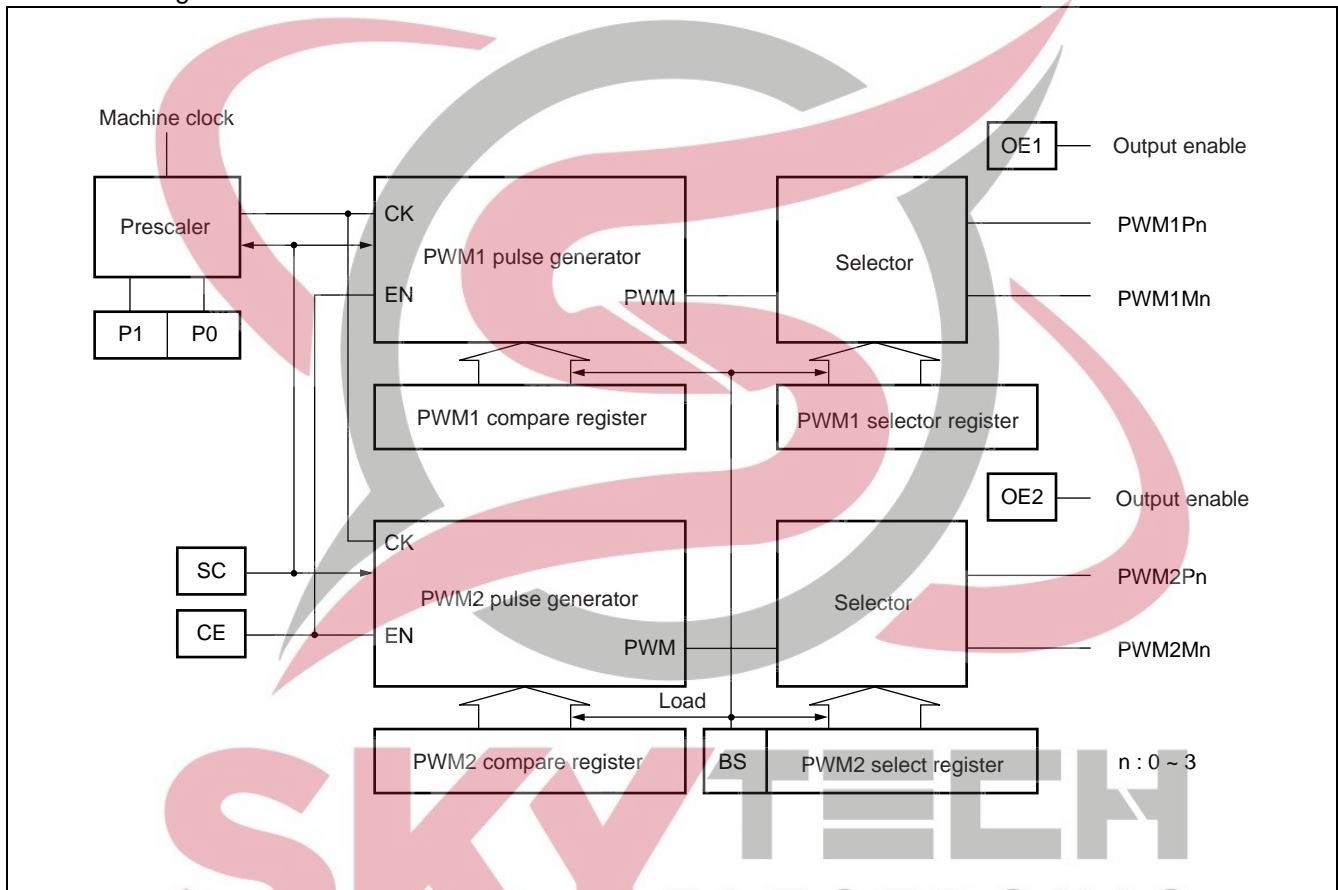

## 15. Sound Generator

The sound generator is composed of a sound control register, frequency data register, amplitude data register, decrement grade register, tone count register, PWM pulse generator, frequency counter, decrement counter, and tone pulse counter.

- Block diagram

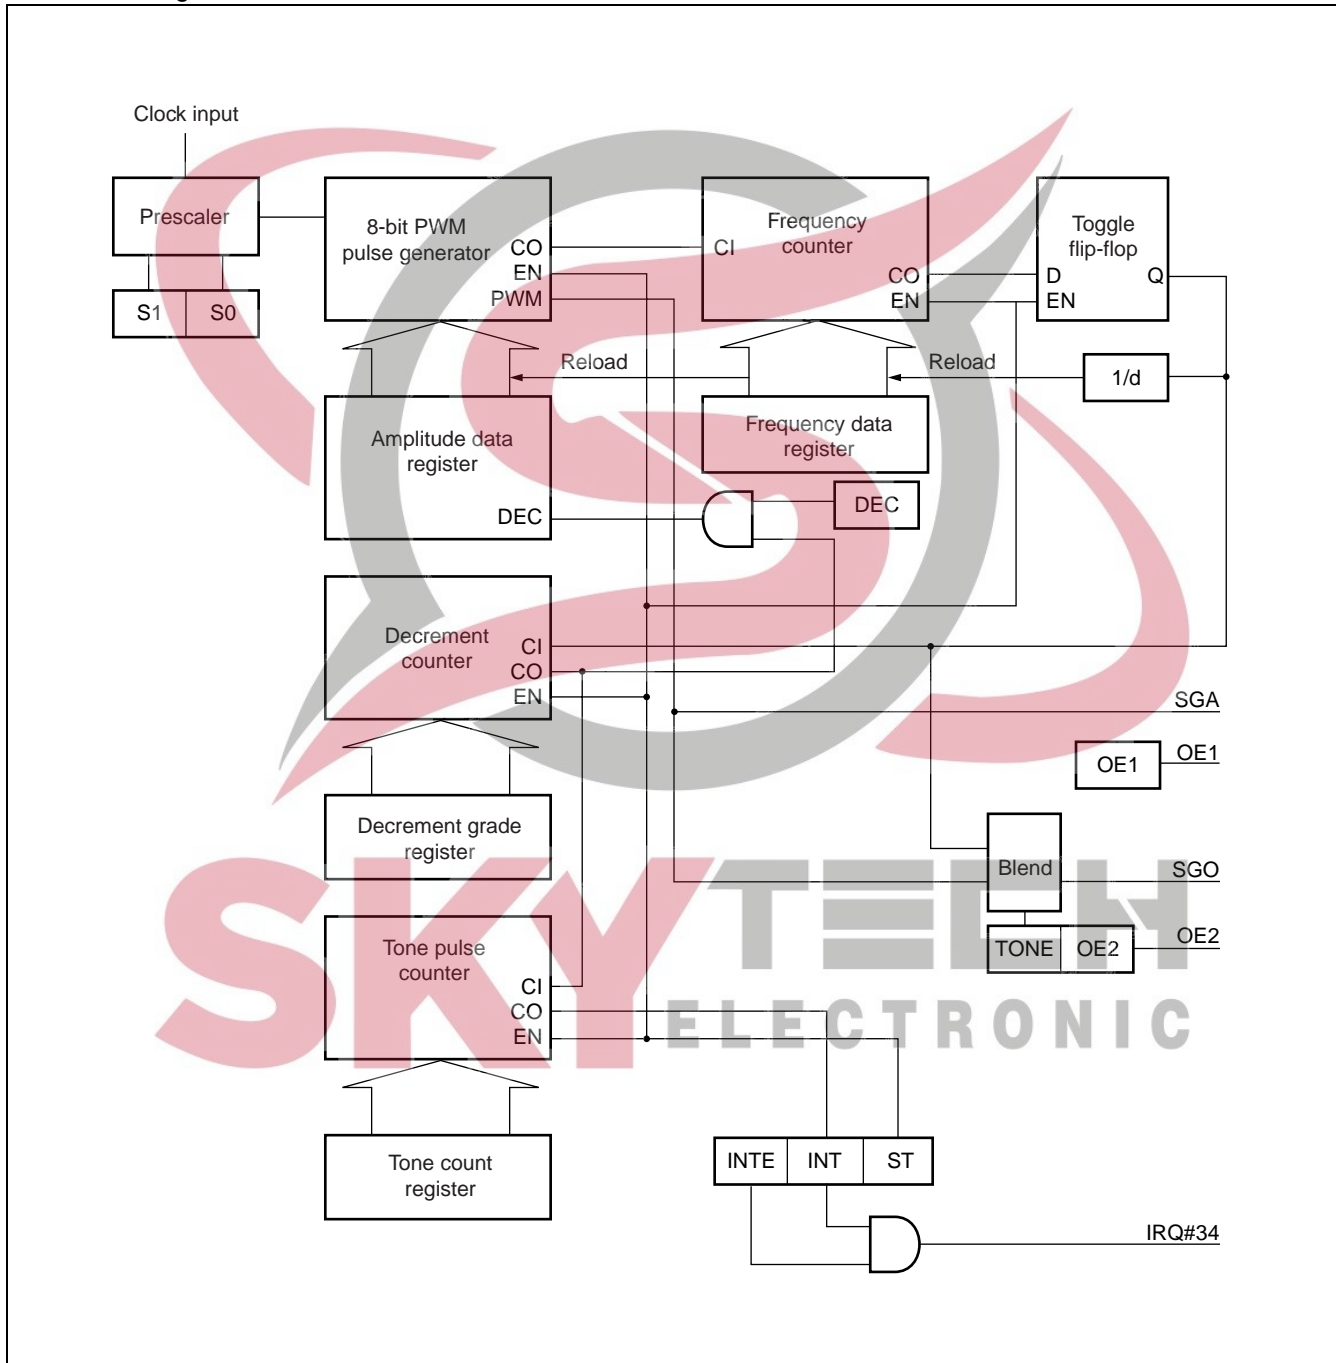


## 16. Address Match Detect Function

If the address setting is the same as the address detection register, an INT9 instruction is executed. The integrated address match detection function can be implemented by processing the INT9 interrupt service routine.

Two address registers are used, each with its own compare enable bit. When there is a match between the address register and program counter, and the compare enable bit is set to "1", the INT9 instruction is forcibly executed by the CPU.


- Block diagram

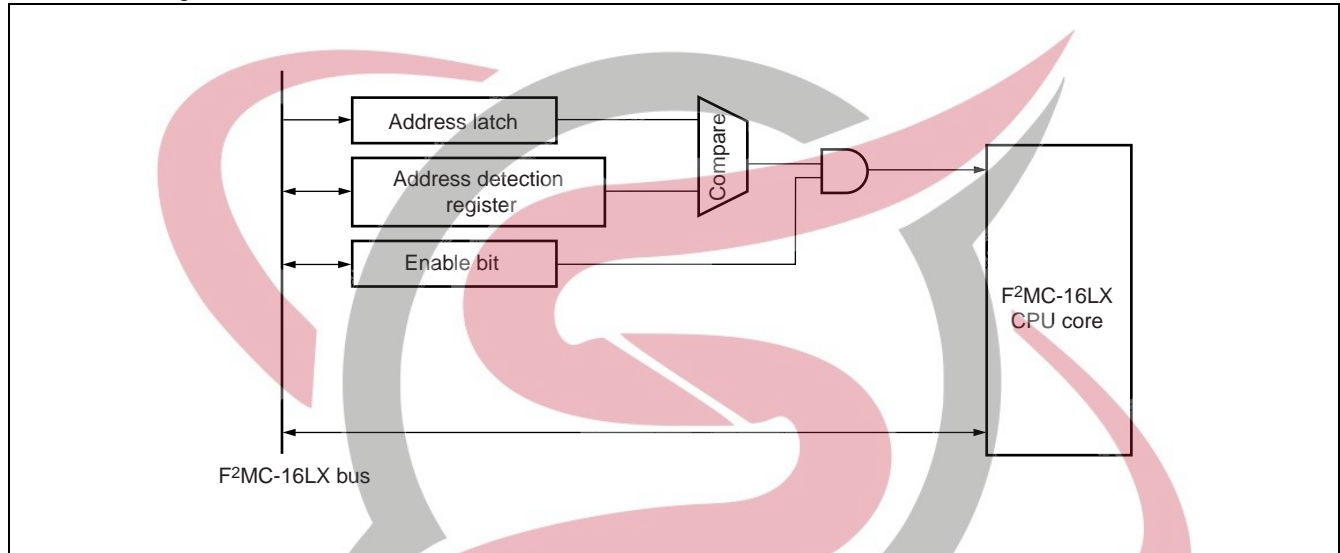

## 17. ROM Mirror Function Select Module

The ROM mirror function select module uses a select register setting to enable the contents of ROM allocated to the FF bank to be viewed in the 00 bank.

- Block diagram

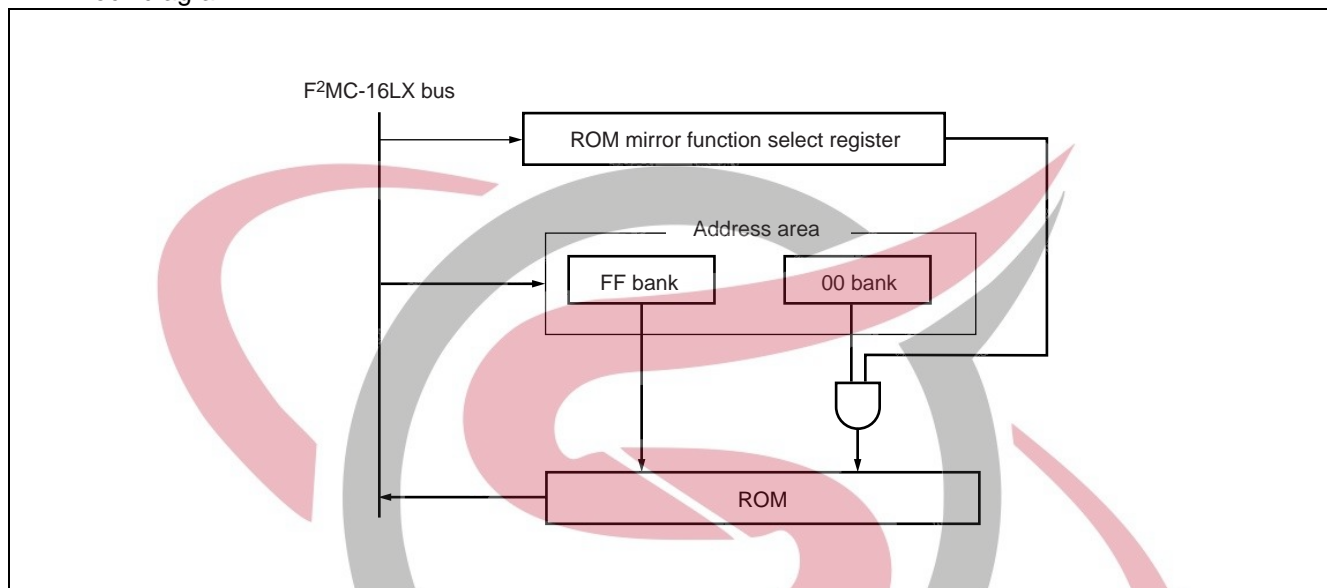

**SKY**TECH  
ELECTRONIC



# MB90420G/425G Series

## ■ ELECTRICAL CHARACTERISTICS

### 1. Absolute Maximum Ratings

(V<sub>SS</sub> = AV<sub>SS</sub> = DV<sub>SS</sub> = 0 V)

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply voltage	V <sub>CC</sub>	V <sub>SS</sub> - 0.3	V <sub>SS</sub> + 6.0	V	
	AV <sub>CC</sub>	V <sub>SS</sub> - 0.3	V <sub>SS</sub> + 6.0	V	AV <sub>CC</sub> = V <sub>CC</sub> *1
	AVRH	V <sub>SS</sub> - 0.3	V <sub>SS</sub> + 6.0	V	AV <sub>CC</sub> ≥ AVRH
	DV <sub>CC</sub>	V <sub>SS</sub> - 0.3	V <sub>SS</sub> + 6.0	V	DV <sub>CC</sub> = V <sub>CC</sub> *1
Input voltage	V <sub>I</sub>	V <sub>SS</sub> - 0.3	V <sub>CC</sub> + 0.3	V	
Output voltage	V <sub>O</sub>	V <sub>SS</sub> - 0.3	V <sub>CC</sub> + 0.3	V	
Maximum clamp current	I <sub>CLAMP</sub>	- 400	+ 400	μA	*5
Total maximum clamp current	Σ  I <sub>CLAMP</sub>	—	4	mA	*5
“L”level maximum output current*2	I <sub>OL1</sub>	—	15	mA	Other than P70-P77, P80-P87
	I <sub>OL2</sub>	—	40	mA	P70-77, P80-87
“L”level average output current*3	I <sub>OLAV1</sub>	—	4	mA	Other than P70-P77, P80-P87
	I <sub>OLAV2</sub>	—	30	mA	P70-77, P80-87
“L”level maximum total output current	ΣI <sub>OL1</sub>	—	100	mA	Other than P70-P77, P80-P87
	ΣI <sub>OL2</sub>	—	330	mA	P70-77, P80-87
“L”level average total output current	ΣI <sub>OLAV1</sub>	—	50	mA	Other than P70-P77, P80-P87
	ΣI <sub>OLAV2</sub>	—	250	mA	P70-77, P80-87
“H”level maximum output current	I <sub>OH1</sub> *2	—	-15	mA	Other than P70-P77, P80-P87
	I <sub>OH2</sub> *2	—	-40	mA	P70-77, P80-87
“H”level average output current	I <sub>OHAV1</sub> *3	—	-4	mA	Other than P70-P77, P80-P87
	I <sub>OHAV2</sub> *3	—	-30	mA	P70-77, P80-87
“H”level maximum total output current	ΣI <sub>OH1</sub>	—	-100	mA	Other than P70-P77, P80-P87
	ΣI <sub>OH2</sub>	—	-330	mA	P70-77, P80-87
“H”level average total output current	ΣI <sub>OHAV1</sub> *4	—	-50	mA	Other than P70-P77, P80-P87
	ΣI <sub>OHAV2</sub> *4	—	-250	mA	P70-77, P80-87
Power consumption	P <sub>D</sub>	—	500	mW	
Operating temperature	T <sub>A</sub>	-40	+105	°C	
Storage temperature	T <sub>STG</sub>	-55	+150	°C	

\*1 : AV<sub>CC</sub>, AVRH and DV<sub>CC</sub> shall never exceed V<sub>CC</sub>.  
Also, AVRH shall never exceed AV<sub>CC</sub>.

\*2 : Maximum output current is defined as the peak value of the current of any one of the corresponding pins.

\*3 : Average output current is defined as the value of the average current flowing over 100 ms at any one of the corresponding pins. The “average value” can be calculated from the formula of “operating current” times “operating factor”.


\*4 : Average total output current is defined as the value of the average current flowing over 100 ms at all of the corresponding pins. The “average value” can be calculated from the formula of “operating current” times “operating factor”.

(Continued)

(Continued)

- \*5 : • Applicable to pins : P00 to P07, P10 to P15, P50 to P57, P70 to P77, P80 to P87
- Use within recommended operating conditions.
  - Use at DC voltage (current) .
  - The +B signal should always be applied with a limiting resistance placed between the +B signal and the microcontroller.
  - The value of the limiting resistance should be set so that when the +B signal is applied the input current to the microcontroller pin does not exceed rated values, either instantaneously or for prolonged periods.
  - Note that when the microcontroller drive current is low, such as in the power saving modes, the +B input potential may pass through the protective diode and increase the potential at the V<sub>CC</sub> pin, and this may affect other devices.
  - Note that if a +B signal is input when the microcontroller current is off (not fixed at 0 V) , the power supply is provided from the pins, so that incomplete operation may result.
  - Note that if the +B input is applied during power-on, the power supply is provided from the pins and the resulting supply voltage may not be sufficient to operate the power-on reset.
  - Care must be taken not to leave the +B input pin open.
  - Note that analog system input/output pins other than the A/D input pins (LCD drive pins, comparator input pins, etc.) cannot accept +B signal input.
  - Sample recommended circuits :

- Input/Output equivalent circuits

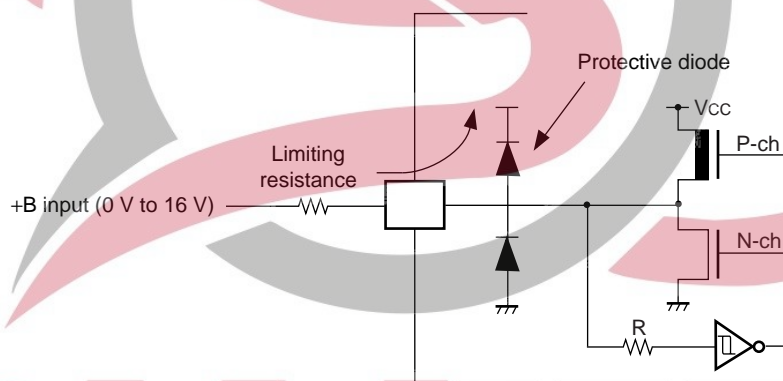

**WARNING:** Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

**SKY** ELECTRONIC


# MB90420G/425G Series

## 2. Recommended Operating Conditions

( $V_{SS} = DV_{SS} = AV_{SS} = 0.0\text{ V}$ )

Parameter	Symbol	Value		Unit	Remarks
		Min	Max		
Power supply voltage	$V_{CC}$ $AV_{CC}$ $DV_{CC}$	3.7	5.5	V	(MB90F428GA/GB, MB90F423GA/GB, MB90428GA/GB, MB90427GA/GB, MB90423GA/GB) Low voltage detection reset starts to work when power supply voltage is $4.0\text{ V} \pm 0.3\text{ V}$ .
		3.0	5.5	V	(MB90F428GC, MB90F423GC, MB90428GC, MB90427GC, MB90423GC)
		4.3	5.5	V	Holding stop operation status (MB90F428GA/GB, MB90F423GA/GB, MB90428GA/GB, MB90427GA/GB, MB90423GA/GB)
		3.0	5.5	V	Holding stop operation status (MB90F428GC, MB90F423GC, MB90428GC, MB90427GC, MB90423GC)
Smoothing capacitor*	$C_S$	0.1	1.0	$\mu\text{F}$	Use a ceramic capacitor or other capacitor of equivalent frequency characteristics. A smoothing capacitor on the $V_{CC}$ pin should have a capacitance greater than $C_S$ .
Operating temperature	$T_A$	-40	+105	$^{\circ}\text{C}$	

\* : For smoothing capacitor  $C_S$  connections, see the illustration below.

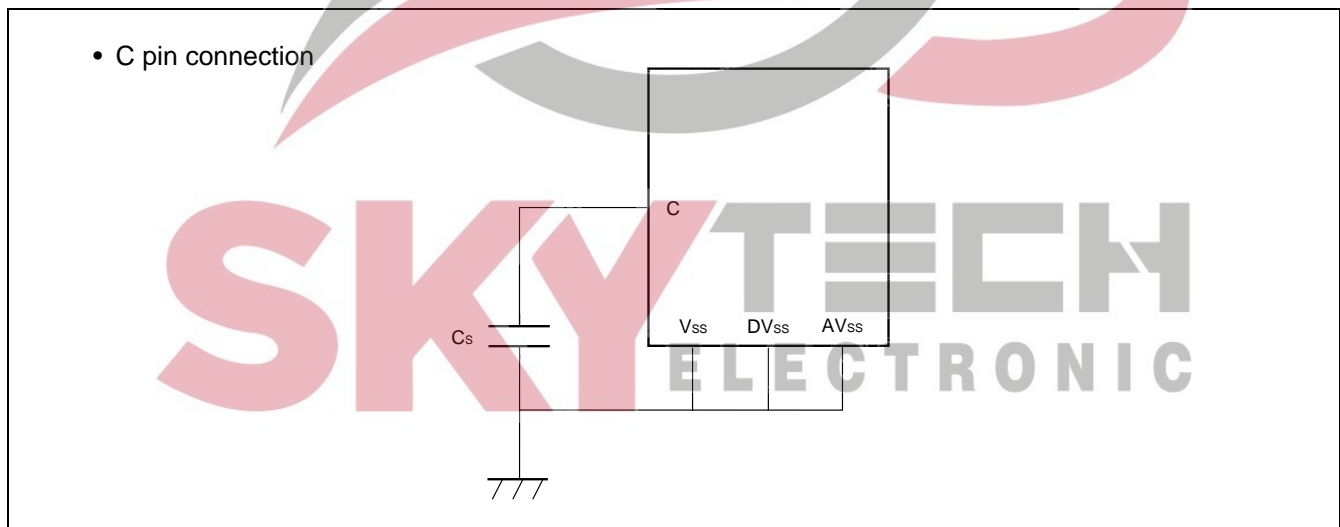

**WARNING:** The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

# MB90420G/425G Series

## 3. DC Characteristics

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = DV_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_A = -40\text{ }^\circ\text{C}$  to  $+105\text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
“H”level input voltage	$V_{IHS}$	—	—	0.8 $V_{CC}$	—	$V_{CC} + 0.3$	V	CMOS hysteresis Automotive level input pin*1
	$V_{IHM}$	—	—	$V_{CC} - 0.3$	—	$V_{CC} + 0.3$	V	MD pin*2
“L”level input voltage	$V_{ILS}$	—	—	$V_{SS} - 0.3$	—	0.5 $V_{CC}$	V	CMOS hysteresis Automotive level input pin*1
	$V_{ILM}$	—	—	$V_{SS} - 0.3$	—	$V_{SS} + 0.3$	V	MD pin*2
Power supply current*3	$I_{CC}$	$V_{CC}$	Operating frequency $F_{CP} = 16\text{ MHz}$ , normal operation	—	45	72	mA	MB90F428GA/GB/GC MB90F423GA/GB/GC
			—	38	61	mA	MB90428GA/GB/GC MB90427GA/GB/GC MB90423GA/GB/GC	
	$I_{CCS}$		Operating frequency $F_{CP} = 16\text{ MHz}$ , sleep mode	—	15	24	mA	MB90F428GA/GB/GC MB90F423GA/GB/GC
			—	13	21	mA	MB90428GA/GB/GC MB90427GA/GB/GC MB90423GA/GB/GC	
	$I_{CTS}$		Operating frequency $F_{CP} = 2\text{ MHz}$ , time base timer mode	—	0.75	1.0	mA	
	$I_{CCL}$		Operating frequency $F_{CP} = 8\text{ kHz}$ , $T_A = 25\text{ }^\circ\text{C}$ , subclock operation	—	0.35	0.7	mA	
	$I_{CCLs}$		Operating frequency $F_{CP} = 8\text{ kHz}$ , $T_A = 25\text{ }^\circ\text{C}$ , sub sleep operation	—	40	100	$\mu\text{A}$	MB90F428GB MB90F423GB MB90428GB MB90427GB MB90423GB
—		10		30	$\mu\text{A}$	MB90F428GC MB90F423GC MB90428GC MB90427GC MB90423GC		
$I_{CCT}$	Operating frequency $F_{CP} = 8\text{ kHz}$ , $T_A = 25\text{ }^\circ\text{C}$ , clock mode	—	40	100	$\mu\text{A}$	MB90F428GA/GB MB90F423GA/GB MB90428GA/GB MB90427GA/GB MB90423GA/GB		

\*1 : All input pins except X0, X0A, MD0, MD1, MD2 pins.

\*2 : MD0, MD1, MD2 pins.

\*3 : Supply current values assume external clock feed from the 1 pin and X1A pin. Users must be aware that supply current levels differ depending on whether an external clock or oscillator is used.

(Continued)

# MB90420G/425G Series

(Continued)

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = DV_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_A = -40\text{ }^\circ\text{C}$  to  $+105\text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Power supply current *3	I <sub>CCH</sub>	V <sub>CC</sub>	T <sub>A</sub> = 25 °C, stop mode	—	5	20	μA	MB90F428G MB90F423G MB90428G MB90427G MB90423G
				—	40	100	μA	MB90F428GA MB90F423GA MB90428GA MB90427GA MB90423GA
Input leakage current	I <sub>IL</sub>	All input pins	V <sub>CC</sub> = DV <sub>CC</sub> = AV <sub>CC</sub> = 5.5 V V <sub>SS</sub> < V <sub>I</sub> < V <sub>CC</sub>	-5	—	5	μA	
Input capacitance 1	C <sub>IN1</sub>	Other than V <sub>CC</sub> , V <sub>SS</sub> , DV <sub>CC</sub> , DV <sub>SS</sub> , AV <sub>CC</sub> , AV <sub>SS</sub> , C, P70 to P77, P80 to P87	—	—	5	15	pF	
Input capacitance 2	C <sub>IN2</sub>	P70 to P77, P80 to P87	—	—	15	45	pF	
Pull-up resistance	R <sub>UP</sub>	R <sub>ST</sub> , MD0, MD1	—	25	50	100	kΩ	
Pull-down resistance	R <sub>DOWN</sub>	MD2	—	25	50	100	kΩ	
Output H voltage 1	V <sub>OH1</sub>	Other than P70 to P77, P80 to P87	V <sub>CC</sub> = 4.5 V I <sub>OH</sub> = -4.0 mA	V <sub>CC</sub> - 0.5	—	—	V	
Output H voltage 2	V <sub>OH2</sub>	P70 to P77, P80 to P87	V <sub>CC</sub> = 4.5 V I <sub>OH</sub> = -30.0 mA	V <sub>CC</sub> - 0.5	—	—	V	
Output L voltage 1	V <sub>OL1</sub>	Other than P70 to P77, P80 to P87	V <sub>CC</sub> = 4.5 V I <sub>OL</sub> = 4.0 mA	—	—	0.4	V	
Output L voltage 2	V <sub>OL2</sub>	P70 to P77, P80 to P87	V <sub>CC</sub> = 4.5 V I <sub>OL</sub> = 30.0 mA	—	—	0.55	V	

\*3: Current values are provisional, and may be changed without prior notice for purposes of characteristic improvement, etc. Supply current values assume external clock feed from the 1 pin and X1A pin. Users must be aware that supply current levels differ depending on whether an external clock or oscillator is used.

(Continued)



# MB90420G/425G Series

(Continued)

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Large current output drive capacity variation 1	$\Delta V_{OH2}$	PWM1Pn, PWM1Mn, PWM2Pn, PWM2Mn, n = 0 to 3	$V_{CC} = 4.5\text{ V}$ $I_{OH} = 30.0\text{ mA}$ $V_{OH2}$ maximum variation	0	—	90	mV	*4
Large current output drive capacity variation 2	$\Delta V_{OL2}$	PWM1Pn, PWM1Mn, PWM2Pn, PWM2Mn, n = 0 to 3	$V_{CC} = 4.5\text{ V}$ $I_{OH} = 30.0\text{ mA}$ $V_{OL2}$ maximum variation	0	—	90	mV	*4
LCD divider resistance	$R_{LCD}$	V0 to V1, V1 to V2, V2 to V3	—	50	100	200	k $\Omega$	
COM0 to COM3 output impedance	$R_{VCOM}$	COMn (n = 0 to 3)	—	—	—	2.5	k $\Omega$	
SEG0 to SEG3 output impedance	$R_{VSEG}$	SEGn (n = 00 to 23)	—	—	—	15	k $\Omega$	
LCD leakage current	$I_{LCDC}$	V0 to V3 COMm (m = 00 to 23) SEGn (n = 00 to 23)	—	-5.0	—	+5.0	$\mu\text{A}$	

\*4 : Defined as maximum variation in  $V_{OH2}/V_{OL2}$  with all channel 0 PWM1P0/PWM1M0/PWM2P0/PWM2M0 simultaneously ON. Similarly for other channels.

**SKY** TECH  
ELECTRONIC



# MB90420G/425G Series


## 4. AC Characteristics

### (1) Clock timing


( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = DV_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_A = -40\text{ }^\circ\text{C to } +105\text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Condi-tions	Value			Unit	Remarks
				Min	Typ	Max		
Base oscillation clock frequency	$F_C$	X0, X1		—	4	—	MHz	
	$F_{LC}$	X0A, X1A		—	32.768	—	kHz	
Base oscillation clock cycle time	$t_{CYL}$	X0, X1		—	250	—	ns	
	$t_{LCYL}$	X0A, X1A		—	30.5	—	$\mu\text{s}$	
Input clock pulse width	$P_{WH}, P_{WL}$	X0		10	—	—	ns	Use duty ratio of 40 to 60% as a guideline
	$P_{WLH}, P_{WLL}$	X0A		—	15.2	—	$\mu\text{s}$	
Input clock rise, fall time	$t_{cr}, t_{cf}$	X0, X0A	—	—	—	5	ns	With external clock signal
Input operating clock frequency	$F_{CP}$	—		2	—	16	MHz	Using main clock, PLL clock
	$F_{LCP}$	—		—	8.192	—	kHz	Using sub clock
Input operating clock cycle time	$t_{CP}$	—		62.5	—	500	ns	Using main clock, PLL clock
	$t_{LCP}$	—		—	122.1	—	$\mu\text{s}$	Using sub clock
Frequency variability ratio* (locked)	$\Delta f$	—		—	—	5	%	


\*: The frequency variability ratio is the maximum proportion of variation from the set central frequency using a multiplier in locked operation.

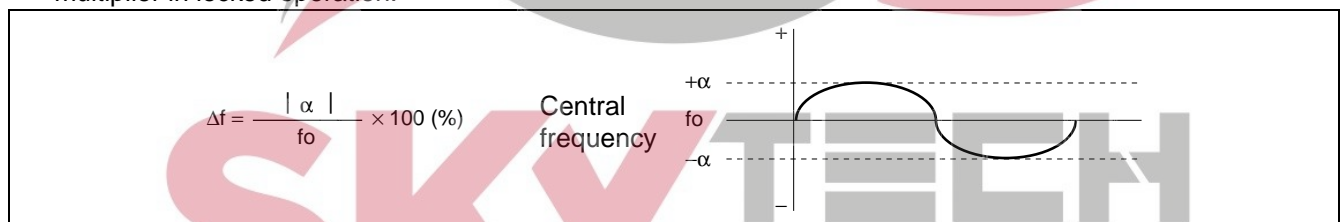

#### • X0 clock timing

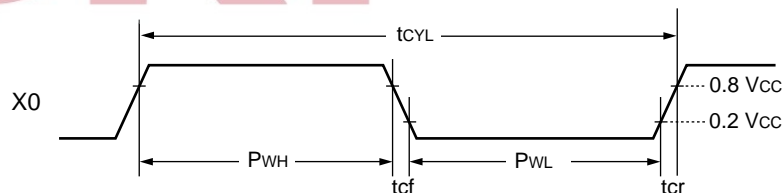


#### • X0A clock timing

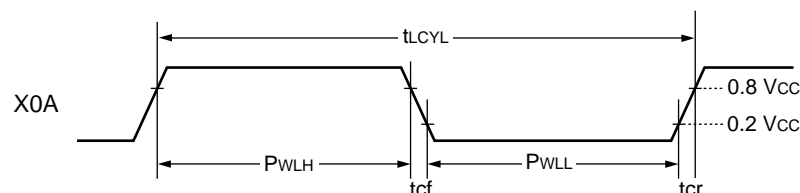

- Range of warranted operation

Relation between internal operating clock frequency and supply voltage

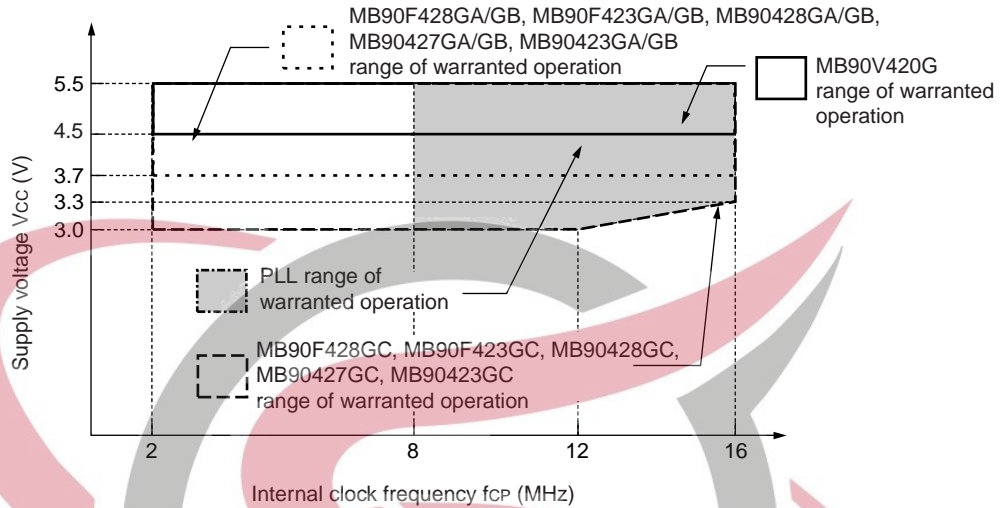


The MB90F428GA/GB, MB90F423GA/GB, MB90428GA/GB, MB90427GA/GB, and MB90423GA/GB enter reset mode at supply voltage below  $4\text{ V} \pm 0.3\text{ V}$ .

Relation between oscillator clock frequency and internal operating clock frequency

		Internal operating clock frequency				
		Main clock	PLL clock			
			Multiplier $\times 1$	Multiplier $\times 2$	Multiplier $\times 3$	Multiplier $\times 4$
Oscillation clock frequency	4 MHz	2 MHz	—	8 MHz	12 MHz	16 MHz


- Sample oscillator circuit

Oscillator element manufacturer	Oscillator	Frequency	C1	C2
Murata Manufacturing Co., Ltd.	CSTCR4M00G15 ( ) A-R0	4 MHz	39 [pF] (Typ)	39 [pF] (Typ)



# MB90420G/425G Series

AC ratings are defined for the following measurement reference voltage values:

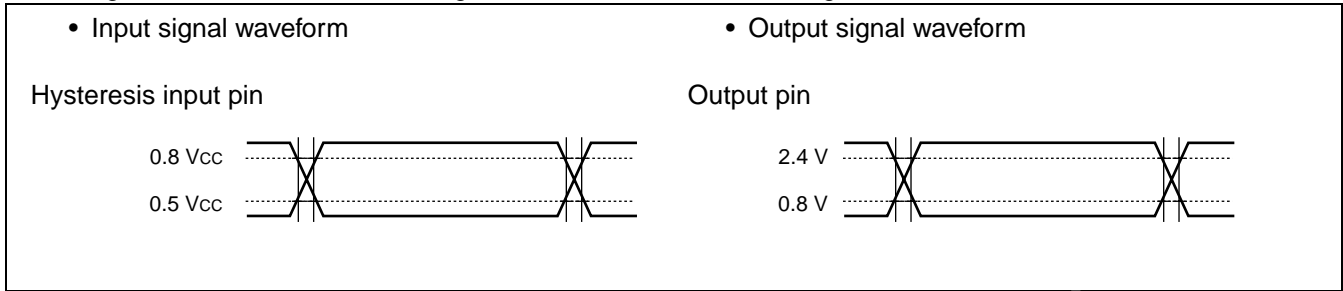


## (2) Reset input

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_A = -40\text{ }^\circ\text{C}$  to  $+105\text{ }^\circ\text{C}$ )


Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Reset input time	$t_{RSTL}$	$\overline{RST}$	—	16 $t_{CP}$	—	ns	In normal operation
				Oscillator oscillation time* + 16 $t_{CP}$	—	ms	In stop mode, sub clock mode, sub sleep mode, watch mode

\*: Oscillator oscillation time is the time to reach 90% amplitude. For a crystal oscillator, this is a few to several hundred ms; for a FAR/ceramic oscillator, this is several hundred ms to a few ms, and for an external clock this is 100  $\mu\text{s}$ .

- Under normal operation

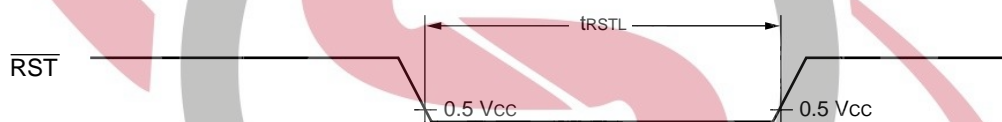

- In stop mode, sub clock mode, sub sleep mode, watch mode

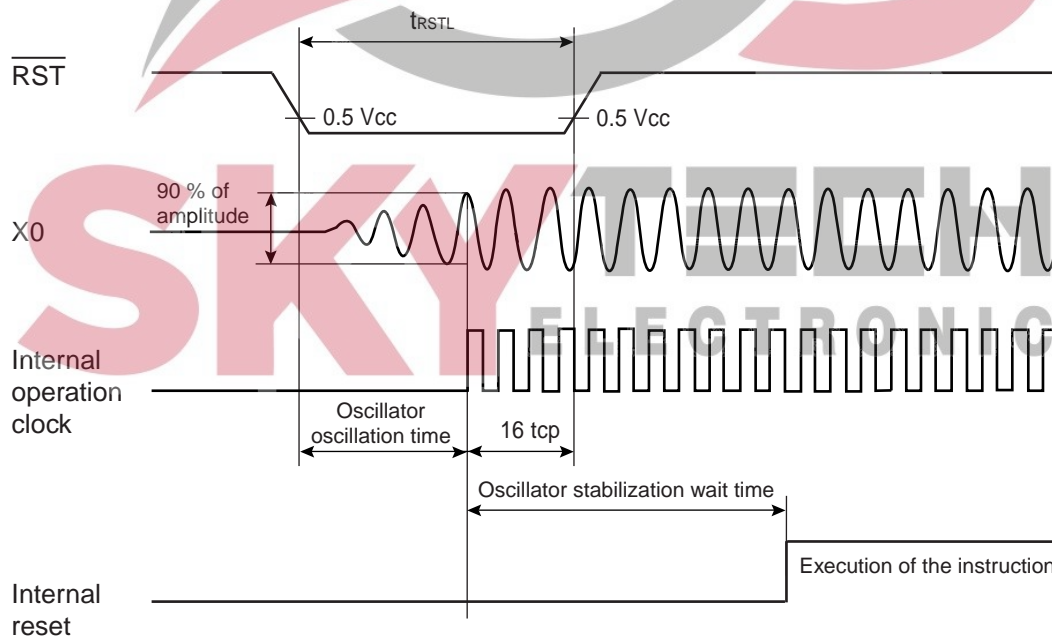


# MB90420G/425G Series

## (3) Power-on reset, power on conditions

( $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40 \text{ }^\circ\text{C}$  to  $+105 \text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Power supply rise time	$t_R$	$V_{CC}$	—	0.05	30	ms	
Power supply start voltage	$V_{OFF}$			—	0.2	V	
Power supply attained voltage	$V_{ON}$			2.7	—	V	
Power supply cutoff time	$t_{OFF}$			50	—	ms	For repeat operation

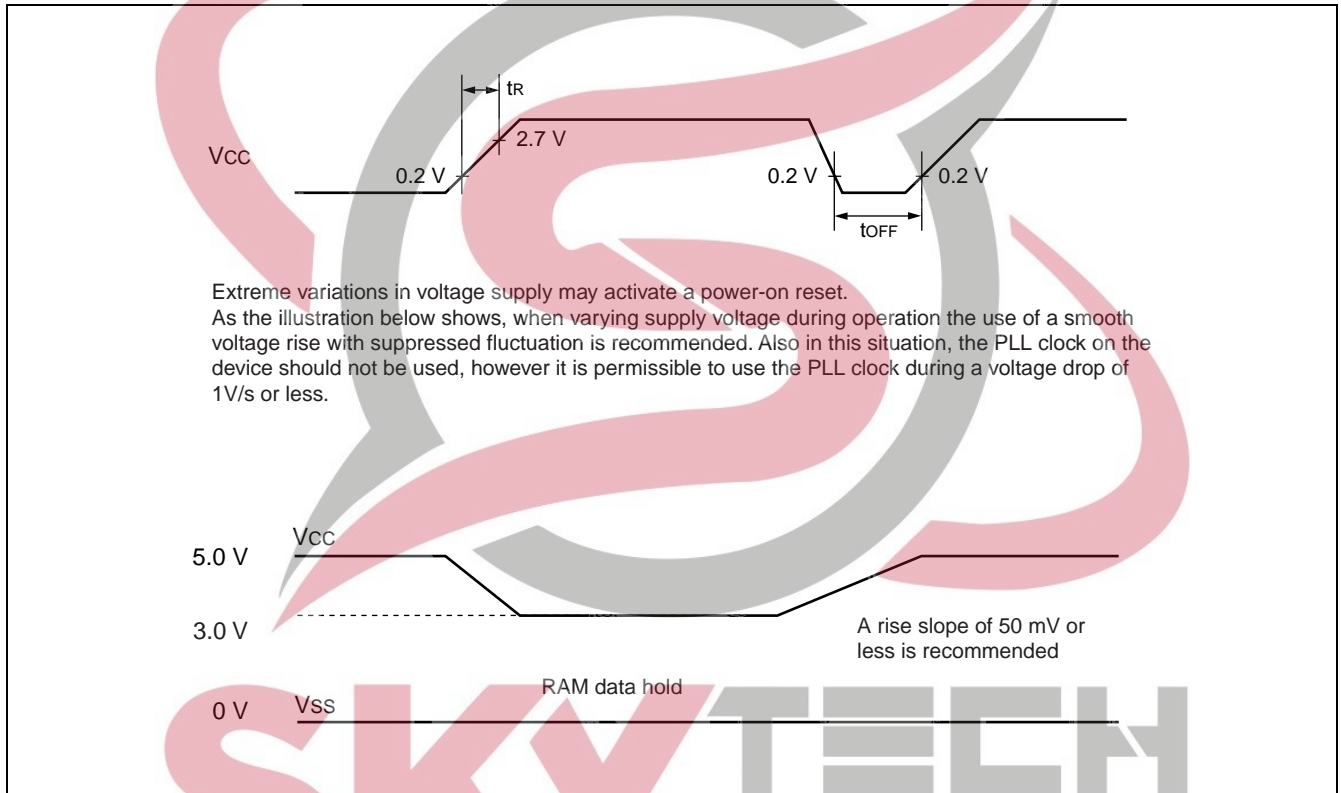

**SKYTECH**  
ELECTRONIC

# MB90420G/425G Series


## (4) UART0, UART1 timing

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_A = -40\text{ }^\circ\text{C}$  to  $+105\text{ }^\circ\text{C}$ )


Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Serial clock cycle time	$t_{SCYC}$	SCK0, SCK1	—	$8 t_{CP}$	—	ns	Internal shift clock mode output pin $C_L = 80\text{ pF} + 1\bullet\text{TTL}$
SCK fall to SOT delay time	$t_{SLOV}$	SCK0, SCK1 SOT0, SOT1		-80	80	ns	
Valid SIN to SCK rise	$t_{VSH}$	SCK0, SCK1		100	—	ns	
SCK rise to valid SIN hold time	$t_{SHIX}$	SIN0, SIN1		60	—	ns	
Serial clock "H" pulse width	$t_{SHSL}$	SCK0, SCK1	—	$4 t_{CP}$	—	ns	External shift clock mode output pin $C_L = 80\text{ pF} + 1\bullet\text{TTL}$
Serial clock "L" pulse width	$t_{SLSH}$			$4 t_{CP}$	—	ns	
SCK fall to SOT delay time	$t_{SLOV}$	SCK0, SCK1 SOT0, SOT1	—	—	150	ns	
Valid SIN to SCK rise	$t_{VSH}$	SCK0, SCK1	60	—	ns		
SCK rise to valid SIN hold time	$t_{SHIX}$	SIN0, SIN1	60	—	ns		

- Notes :
- AC ratings are for CLK synchronous mode.
  - $C_L$  is load capacitance connected to pin during testing.

### • Internal shift clock mode

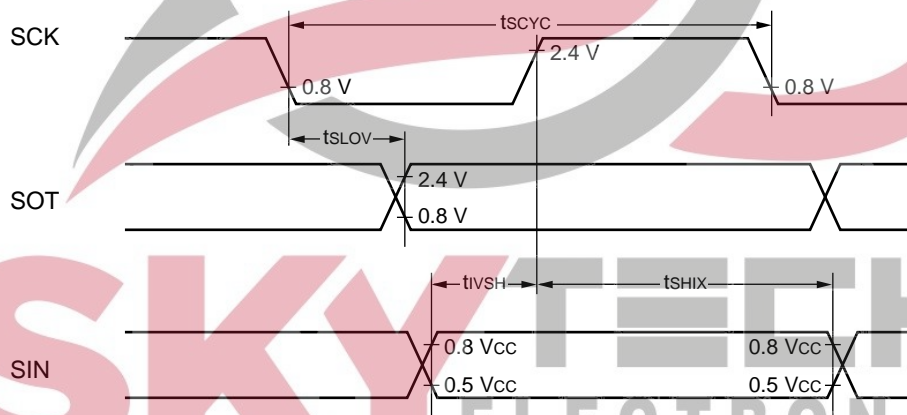

### • External shift clock mode

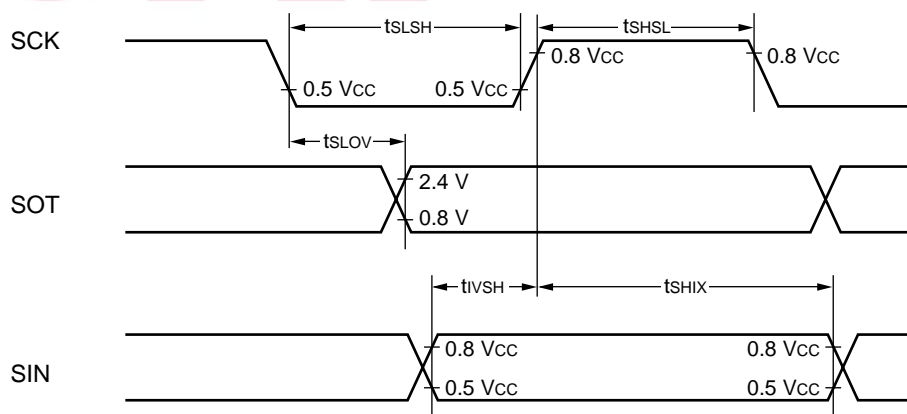




# MB90420G/425G Series

## (5) Timer input timing

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_A = -40\text{ }^\circ\text{C}$  to  $+105\text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Input pulse width	$t_{TIWH}$ $t_{TIWL}$	TIN0, TIN1, INO, IN1, IN2, IN3,	—	4 $t_{CP}$	—	ns	

### • Timer input timing

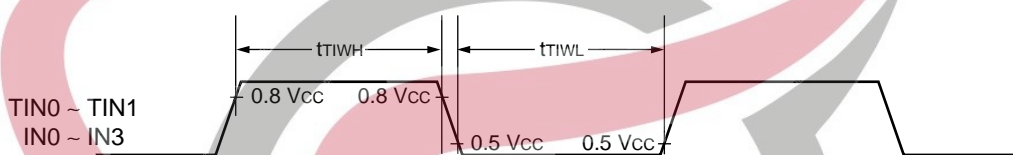

## (6) Trigger input timing

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_A = -40\text{ }^\circ\text{C}$  to  $+105\text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Input pulse width	$t_{TRGH}$ , $t_{TRGL}$	INT0 to INT7	—	5 $t_{CP}$	—	ns	Under normal operation
				1	—	$\mu\text{s}$	In stop mode


### • Trigger input timing



## (7) Low voltage detection

( $V_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_A = -40\text{ }^\circ\text{C}$  to  $+105\text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Detection voltage	$V_{DL}$	$V_{CC}$	—	3.7	4.0	4.3	V	During voltage drop
Hysteresis width	$V_{HYS}$	$V_{CC}$	—	0.1	—	—	V	During voltage rise
Power supply voltage fluctuation ratio	$dV/dt$	$V_{CC}$	—	-0.1	—	0.02	V/ $\mu\text{s}$	
Detection delay time	$t_d$	—	—	—	—	35	$\mu\text{s}$	

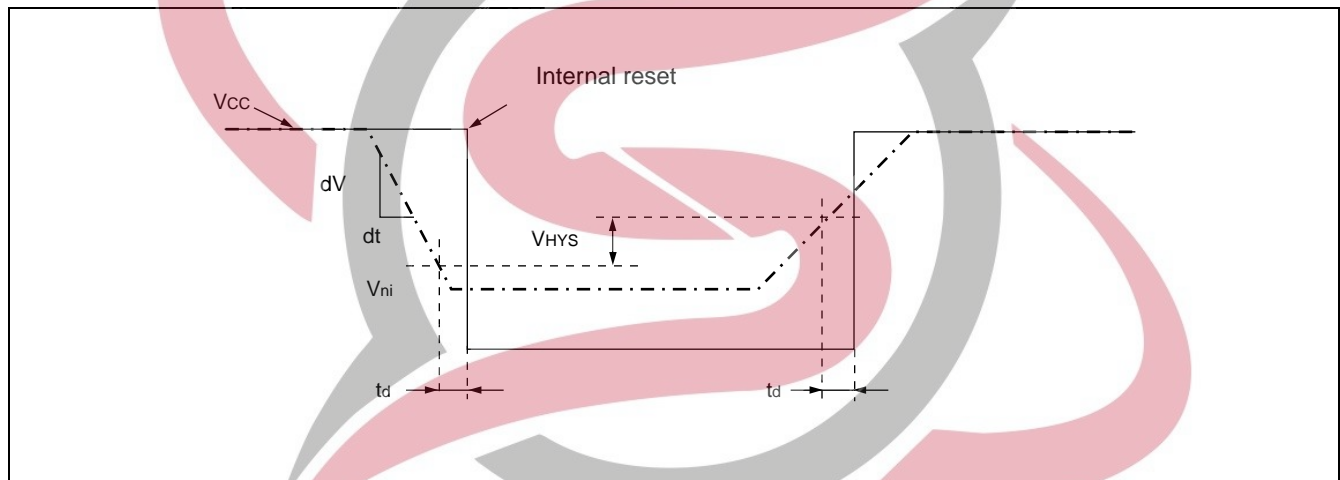

**SKYTECH**  
ELECTRONIC

# MB90420G/425G Series

## 5. A/D Conversion Block

### (1) Electrical Characteristics

( $V_{CC} = AV_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_A = -40\text{ }^\circ\text{C}$  to  $+105\text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Value			Unit	Remarks
			Min	Typ	Max		
Resolution	—	—	—	—	10	bit	
Total error	—	—	—	—	$\pm 5.0$	LSB	
Non-linear error	—	—	—	—	$\pm 2.5$	LSB	
Differential linear error	—	—	—	—	$\pm 1.9$	LSB	
Zero transition voltage	$V_{OT}$	AN0 to AN7	$AV_{SS}$ - 3.5 LSB	$AV_{SS}$ + 0.5 LSB	$AV_{SS}$ + 4.5 LSB	V	1 LSB = (AVRH - AVSS) / 1024
Full scale transition voltage	$V_{FST}$	AN0 to AN7	AVRH - 6.5 LSB	AVRH - 1.5 LSB	AVRH + 1.5 LSB	V	
Sampling time	$t_{SMP}$	—	2.000	—	—	$\mu\text{s}$	*1
Compare time	$t_{CMP}$	—	4.125	—	—	$\mu\text{s}$	*2
A/D conversion time	$t_{CNV}$	—	6.125	—	—	$\mu\text{s}$	*3
Analog port input current	$I_{AIN}$	AN0 to AN7	—	—	10	$\mu\text{A}$	$V_{AVSS} = V_{AIN} = V_{AVCC}$
Analog input current	$V_{AIN}$	AN0 to AN7	0	—	AVRH	V	
Reference voltage	AVR+	AVRH	3.0	—	$AV_{CC}$	V	
Power supply current	$I_A$	$AV_{CC}$	—	2.3	6.0	mA	
	$I_{AH}$		—	—	5	$\mu\text{A}$	*4
Reference voltage feed current	$I_R$	AVRH	200	400	600	$\mu\text{A}$	$V_{AVRH} = 5.0\text{ V}$
	$I_{RH}$	AVRH	—	—	5	$\mu\text{A}$	*4
Inter-channel variation	—	AN0 to AN7	—	—	4	LSB	

\*1 : At  $F_{CP} = 16\text{ MHz}$ ,  $t_{SMP} = 32 \times t_{CP} = 2.000\text{ }(\mu\text{s})$  .

\*2 : At  $F_{CP} = 16\text{ MHz}$ ,  $t_{CMP} = 66 \times t_{CP} = 4.125\text{ }(\mu\text{s})$  .

\*3 : Equivalent to conversion time per channel at  $F_{CP} = 16\text{ MHz}$ , and selection of  $t_{SMP} = 32 \times t_{CP}$  and  $t_{CMP} = 32 \times t_{CP}$ .

\*4 : Defined as supply current (when  $V_{CC} = AV_{CC} = AVRH = 5.0\text{ V}$ ) with A/D converter not operating, and CPU in stop mode.

Notes : •The relative error increases as AVRH is reduced.


•The output impedance ( $r_s$ ) on the external analog input circuit should be used as follows.

External circuit output impedance  $r_s = 5\text{ k}\Omega$  max.

•If the output impedance on the external circuit is too great, the analog voltage sampling time may be insufficient.

•If DC inhibitor capacitance is placed between the external circuit and input pin, then a capacitance value several thousand times the value of the chip internal sampling capacitance (CSH) should be selected in order to suppress the effects of voltage division with CSH.

- Analog input equivalent circuit

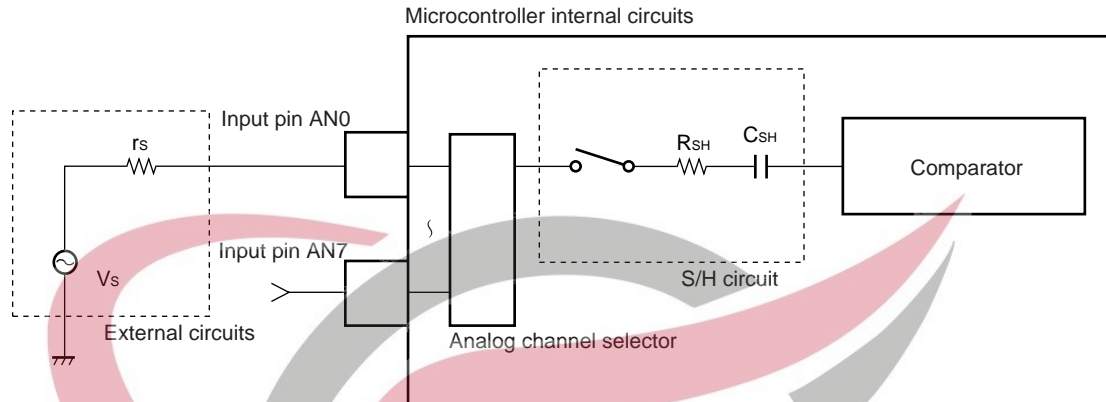

<Recommended and guide values for element parameters>

$r_s = 5 \text{ k}\Omega$  or less  
 $R_{SH} = \text{approx. } 3 \text{ k}\Omega$   
 $C_{SH} = \text{approx. } 25 \text{ pF}$


Note : These element parameters are intended as guidelines for reference, and are not warranted for actual use.

# MB90420G/425G Series

## (2) Definition of terms

- Resolution  
Indicates the ability of the A/D converter to discriminate in analog conversion.  
10-bit resolution indicates that analog voltage can be resolved into  $2^{10} = 1024$  levels.
- Total error  
Expresses the difference between actual and logical values. It is the total value of errors that can come from offset error, gain error, non-linearity error and noise.
- Linearity error  
Expresses the deviation between actual conversion characteristics and a straight line connecting the device's zero transition point (00 0000 0000  $\leftrightarrow$  00 0000 0001) and full scale transition point (11 1111 1110  $\leftrightarrow$  11 1111 1111).
- Differential linearity error  
Expresses the deviation of the logical value of input voltage required to create a variation of 1 SLB in output code.

### • 10-bit A/D converter conversion characteristics

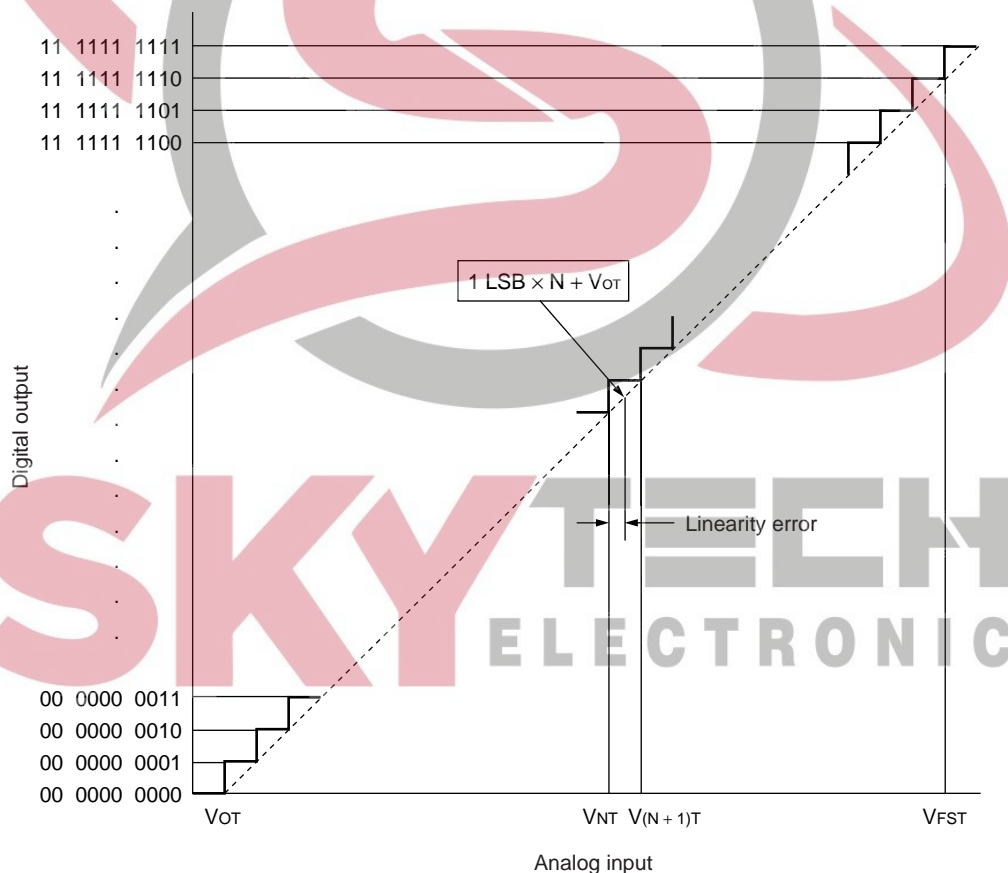

$$1 \text{ LSB} = \frac{V_{FST} - V_{OT}}{1022}$$

$$\text{Linearity error} = \frac{V_{NT} - (1 \text{ LSB} \times N + V_{OT})}{1 \text{ LSB}} \text{ [LSB]}$$

$$\text{Differential linearity error} = \frac{V_{(N+1)T} - V_{NT}}{1 \text{ LSB}} - 1 \text{ [LSB]}$$

## 6. Flash Memory Program and Erase Performances


Parameter	Conditions	Value			Unit	Remarks
		Min	Typ	Max		
Sector erase time	T <sub>A</sub> = + 25 °C V <sub>CC</sub> = 5.0 V	—	1	15	s	Excludes 00H programming prior erasure
Chip erase time		—	5	—	s	Excludes 00H programming prior erasure
Word (16 bit width) programming time		—	16	3,600	μs	Excludes system-level overhead
Erase/Program cycle	—	10,000	—	—	cycle	






# MB90420G/425G Series

## EXAMPLE CHARACTERISTICS

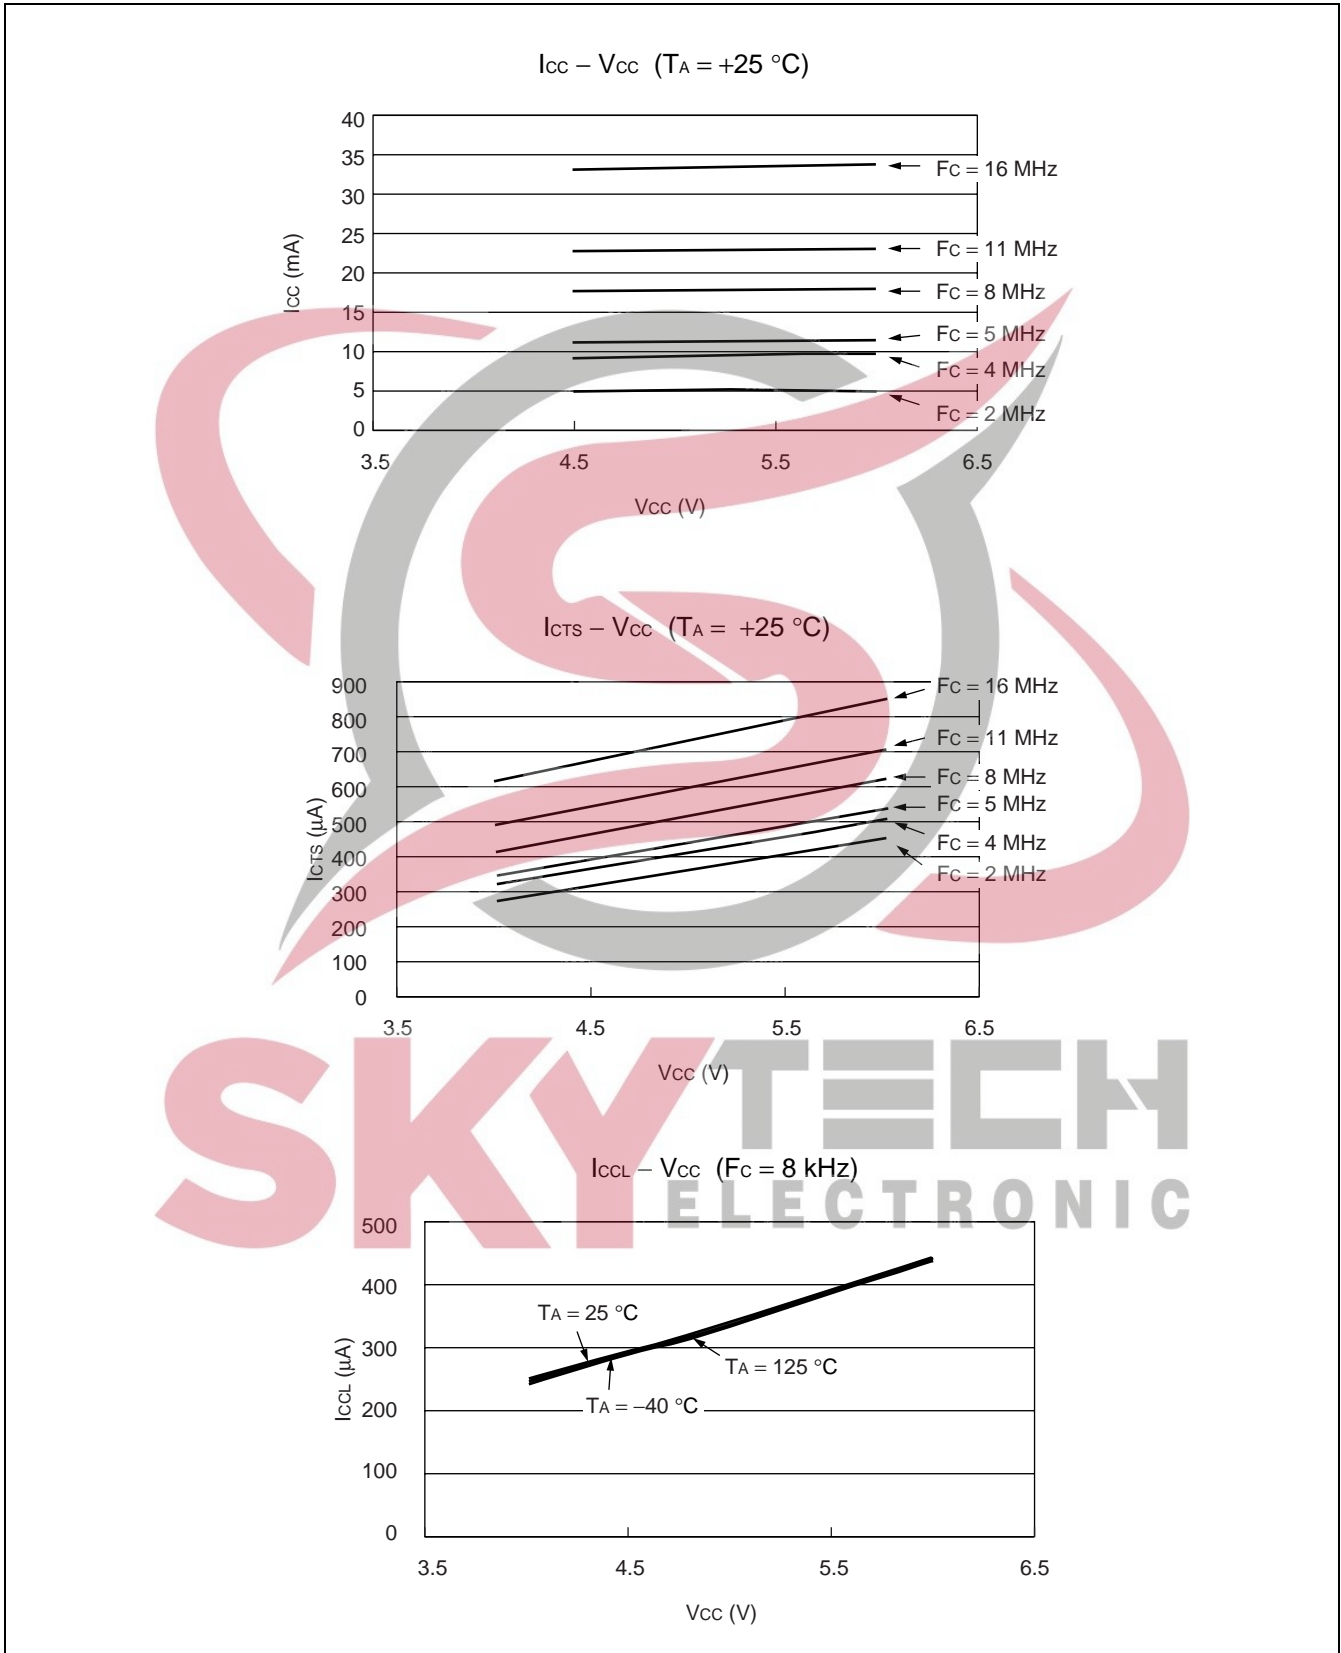

(Continued)

(Continued)

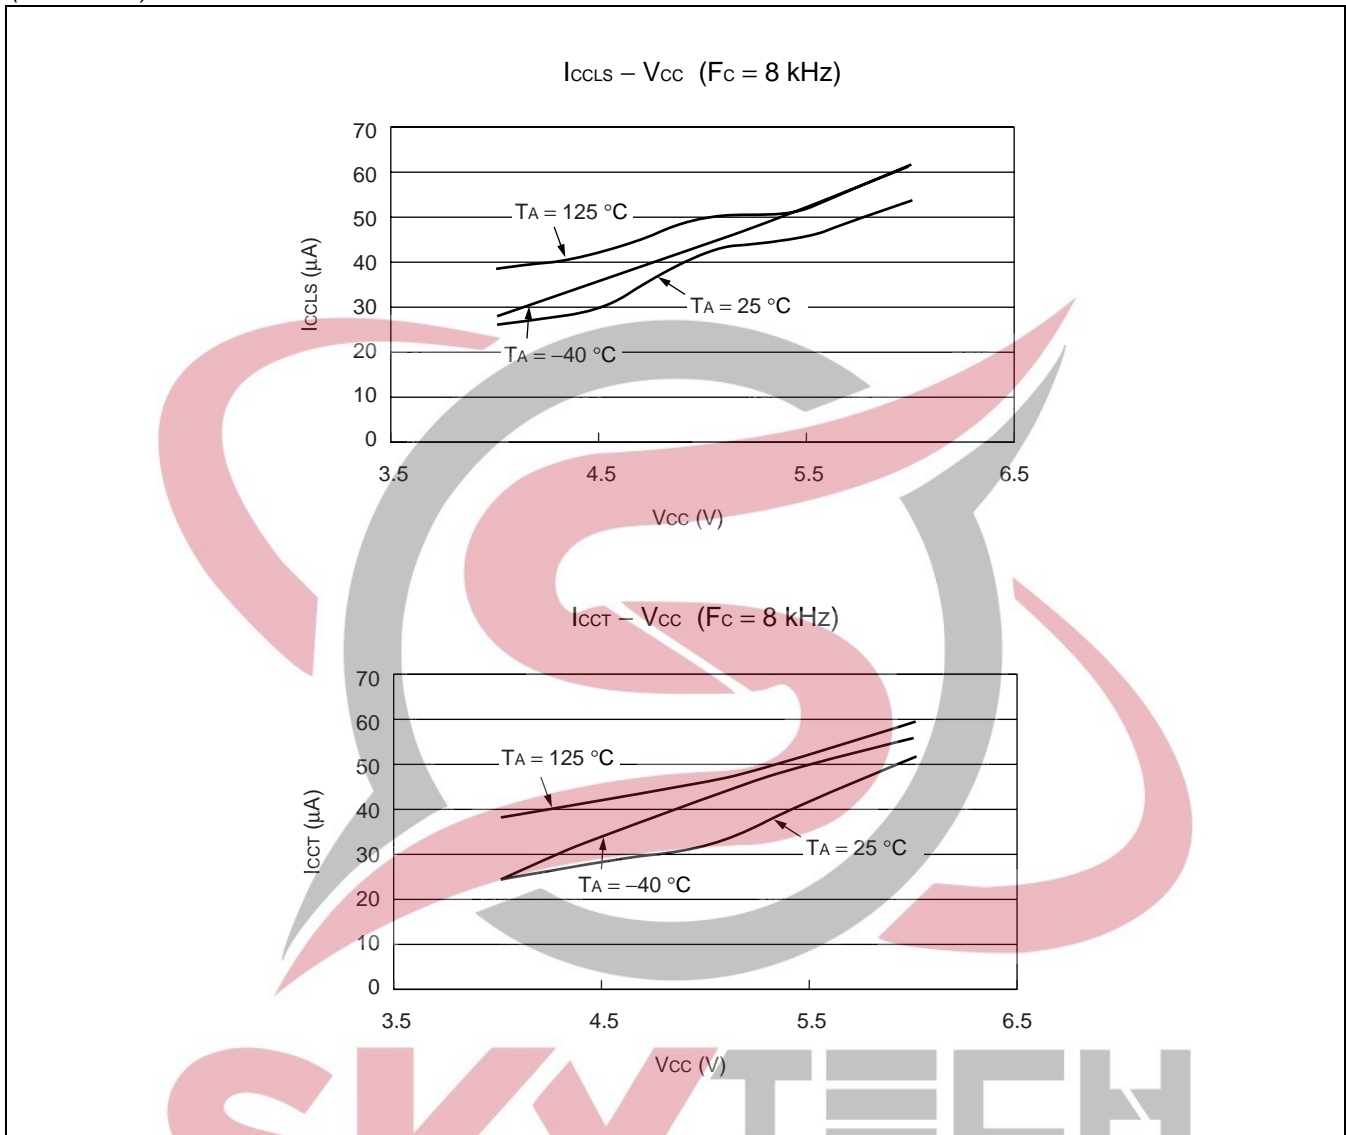


**SKYTECH**  
ELECTRONIC


# MB90420G/425G Series

## ■ ORDERING INFORMATION

Part number	Package	Remarks
MB90F423GAPF MB90F423GBPF MB90F423GCPF MB90F428GAPF MB90F428GBPF MB90F428GBPF MB90F428GCPF MB90423GAPF MB90423GBPF MB90423GCPF MB90427GAPF MB90427GBPF MB90427GCPF MB90428GAPF MB90428GBPF MB90428GCPF	Plastic QFP, 100-pin (FPT-100P-M06)	
MB90F423GAPFV MB90F423GBPFV MB90F423GCPFV MB90F428GAPFV MB90F428GBPFV MB90F428GCPFV MB90423GAPFV MB90423GBPFV MB90423GCPFV MB90427GAPFV MB90427GBPFV MB90427GCPFV MB90428GAPFV MB90428GBPFV MB90428GCPFV	Plastic LQFP, 100-pin (FPT-100P-M05)	

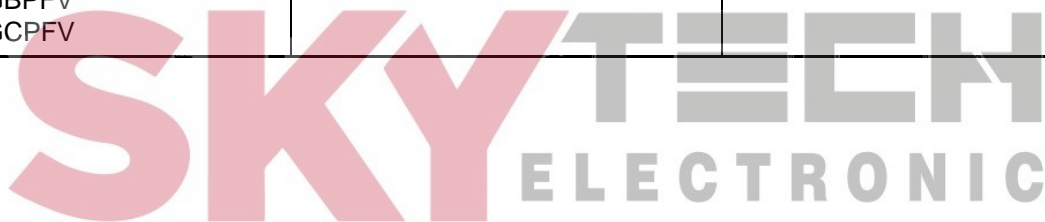

## ■ PACKAGE DIMENSIONS

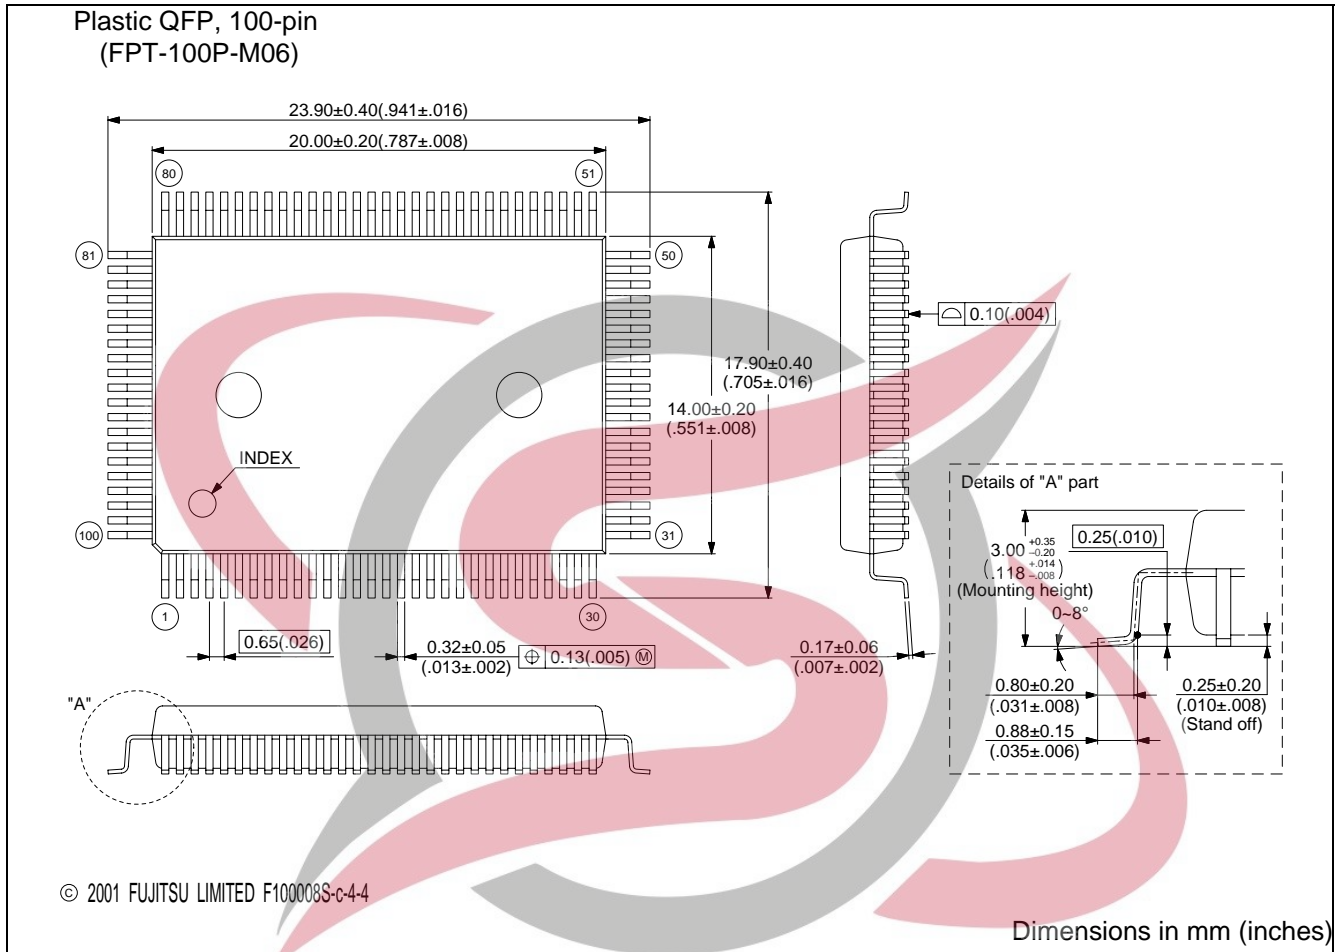

(Continued)


# SKYTECH

## ELECTRONIC

# MB90420G/425G Series

(Continued)

Plastic LQFP, 100-pin  
(FPT-100P-M05)

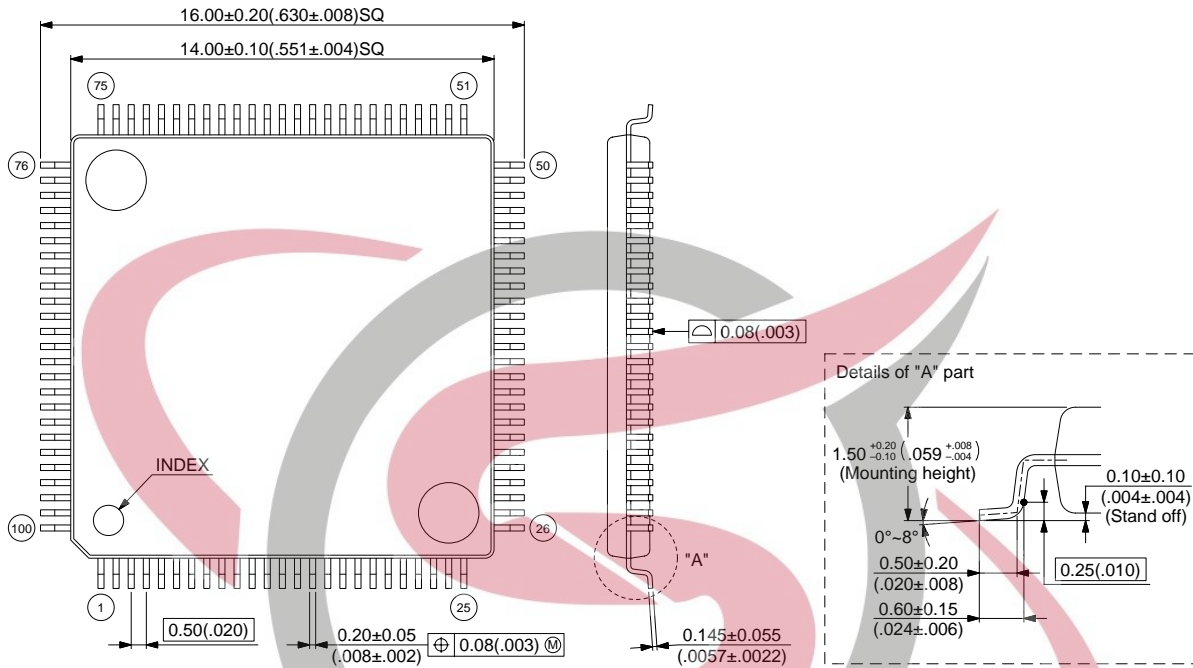

© 2000 FUJITSU LIMITED F100007S-3c-5

Dimensions in mm (inches)

**SKYTECH**  
ELECTRONIC

## FUJITSU LIMITED

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document are presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that Fujitsu will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Law of Japan, the prior authorization by Japanese government will be required for export of those products from Japan.

F0202

© FUJITSU LIMITED Printed in Japan



TECH  
ELECTRONIC