

GENERAL DESCRIPTION

The SGM5532L is a dual, low noise operational amplifier, which operates on a wide supply range from 5V to 36V.

The SGM5532L offers an ultra-low noise of $6\text{nV}/\sqrt{\text{Hz}}$ with low distortion. It features unity-gain bandwidth for maximum output swing condition, high slew rate and high output current. The device also provides ESD diodes to protect the input and has output short-circuit protection. The SGM5532L is unity-gain stable.

The SGM5532L is available in a Green SOIC-8 package. It operates over an ambient temperature range of -40°C to $+85^{\circ}\text{C}$.

FEATURES

- **Ultra-Low Input Voltage Noise:**
 $6\text{nV}/\sqrt{\text{Hz}}$ (TYP) at 1kHz
- **Unity-Gain Bandwidth:** 9.5MHz (TYP)
- **High Slew Rate:** $18\text{V}/\mu\text{s}$ (TYP)
- **CMRR:** 140dB (TYP)
- **High Open-Loop Gain:** 145dB (TYP)
- **-40°C to $+85^{\circ}\text{C}$ Operating Temperature Range**
- **Available in a Green SOIC-8 Package**

APPLICATIONS

High-End A/V Receiving Machines
Professional Audio Mixers
Video Broadcasting
Video Transcoders for Multichannel Applications
Laptops
Embedded Computers


PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM5532L	SOIC-8	-40°C to +85°C	SGM5532LYS8G/TR	SGM 5532LYS8 XXXXXX	Tape and Reel, 4000

MARKING INFORMATION

NOTE: XXXXX = Date Code and Vendor Code.

XXXXX



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, $+V_S$ to $-V_S$	40V
Input Common Mode Voltage Range	$(-V_S) - 0.3V$ to $(+V_S) + 0.3V$
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility	
HBM	5000V
CDM	1000V

RECOMMENDED OPERATING CONDITIONS

Supply Voltage, $+V_S$ to $-V_S$	5V to 36V
Operating Temperature Range	-40°C to +85°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION


This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures

can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

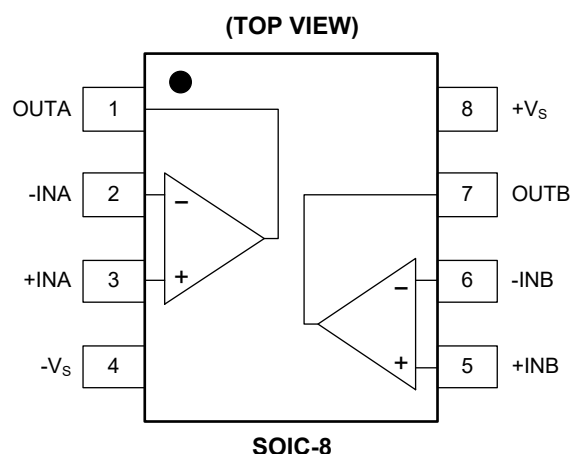

ELECTRICAL CHARACTERISTICS


(V_S = ±15V, R_L = 2kΩ connected to 0V, Full = -40°C to +85°C, typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Input Characteristics							
Input Offset Voltage	V _{OS}	V _{CM} = 0V	+25°C		3	550	μV
			Full			650	
Input Offset Voltage Drift	ΔV _{OS} /ΔT		Full		0.6		μV/°C
Input Bias Current	I _B	V _{CM} = 0V	+25°C		510	650	nA
			Full			750	
Input Offset Current	I _{OS}	V _{CM} = 0V	+25°C		1.3	70	nA
			Full			100	
Input Common Mode Voltage Range	V _{CM}		Full	-13		13	V
Common Mode Rejection Ratio	CMRR	V _S = ±15V, -13V < V _{CM} < 13V	+25°C	128	140		dB
			Full	124			
Open-Loop Voltage Gain	A _{OL}	V _S = ±15V, V _{OUT} = ±10V, R _L = 2kΩ	+25°C	128	145		dB
			Full	124			
		V _S = ±15V, V _{OUT} = ±10V, R _L = 600Ω	+25°C	110	128		
			Full	105			
Output Characteristics							
Output Voltage Swing from Rail	V _{OUT}	V _S = ±15V, R _L = 2kΩ	+25°C		150	220	mV
			Full			300	
		V _S = ±15V, R _L = 600Ω	+25°C		550	800	
			Full			1100	
Output Short-Circuit Current	I _{SC}	V _S = ±15V	+25°C	±26	±36		mA
Power Supply							
Operating Voltage Range	V _S		Full	5		36	V
Quiescent Current	I _Q	I _{OUT} = 0A	+25°C		5.5	8	mA
			Full			9	
Power Supply Rejection Ratio	PSRR	V _S = 5V to 36V	+25°C	115	135		dB
			Full	112			
Dynamic Performance							
Gain-Bandwidth Product	GBP		+25°C		16		MHz
Slew Rate	SR		+25°C		18		V/μs
Overload Recovery Time	ORT	V _{IN} × G = V _S	+25°C		1.2		μs
Maximum Output-Swing Bandwidth	B _{OM}	V _S = ±15V, V _{OUT} = ±10V, R _L = 600Ω	+25°C		280		kHz
Unity-Gain Bandwidth	B ₁	V _{IN} = 1mV _{P-P} , R _L = 600Ω, G = +100	+25°C		9.5		MHz
Total Harmonic Distortion + Noise	THD+N	V _S = ±15V, V _{OUT} = 10V _{P-P} , f = 1kHz, G = +1, R _L = 600Ω	+25°C		0.00005		%
Noise							
Input Voltage Noise		f = 0.1Hz to 10Hz	+25°C		0.3		μV _{P-P}
Input Voltage Noise Density	e _n	f = 30Hz	+25°C		15		nV/√Hz
		f = 1kHz	+25°C		6		
Input Current Noise Density	i _n	f = 30Hz	+25°C		3		pA/√Hz
		f = 1kHz	+25°C		1		


TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_S = \pm 15\text{V}$ and $R_L = 2\text{k}\Omega$, unless otherwise noted.


Large-Signal Step Response

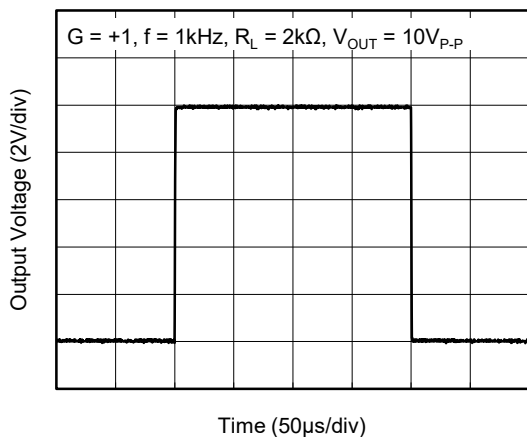


Small-Signal Step Response

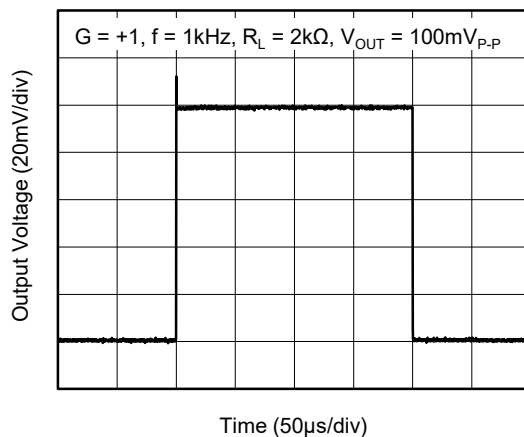


Positive Overload Recovery

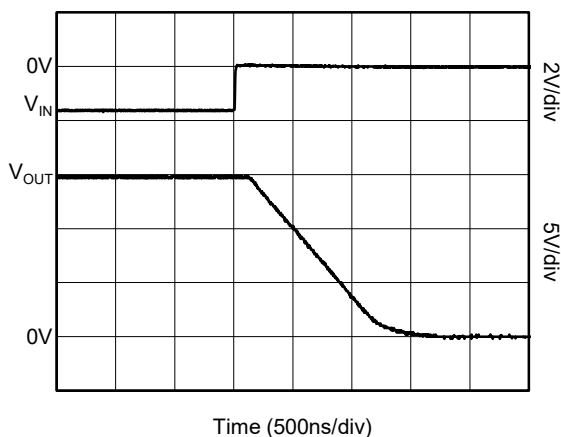


Negative Overload Recovery

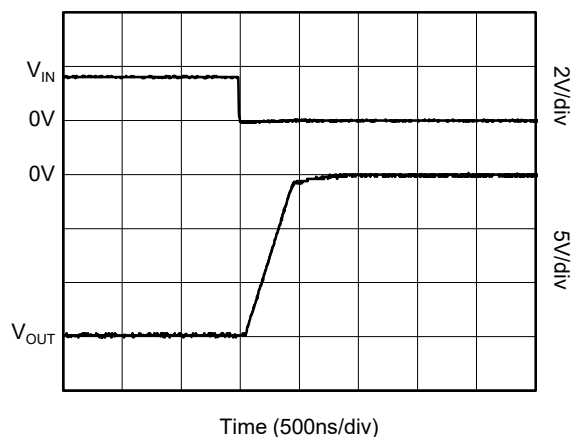

Input Offset Voltage vs. Input Common Mode Voltage






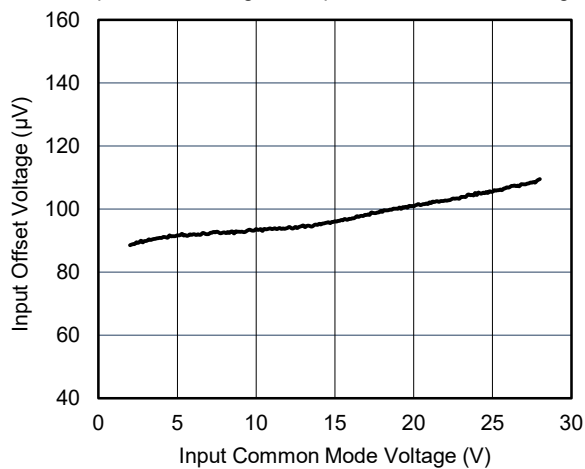


Output Voltage vs. Output Current

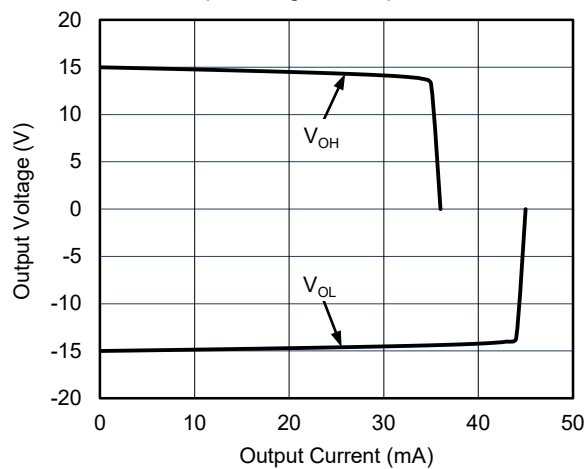







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = \pm 15\text{V}$ and $R_L = 2\text{k}\Omega$, unless otherwise noted.

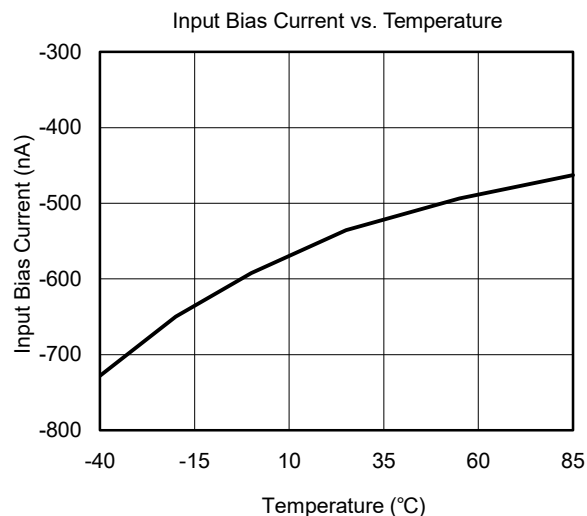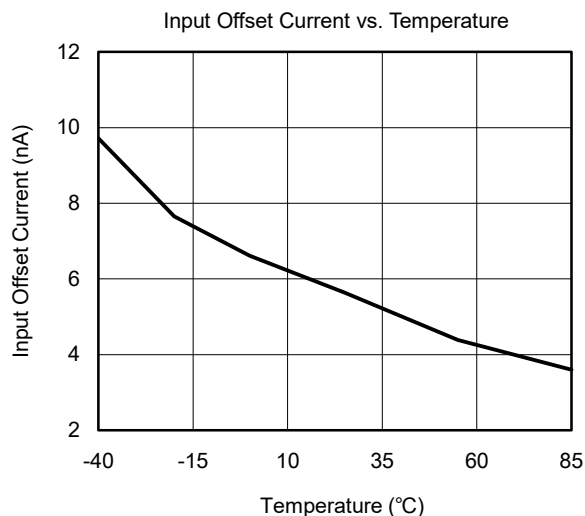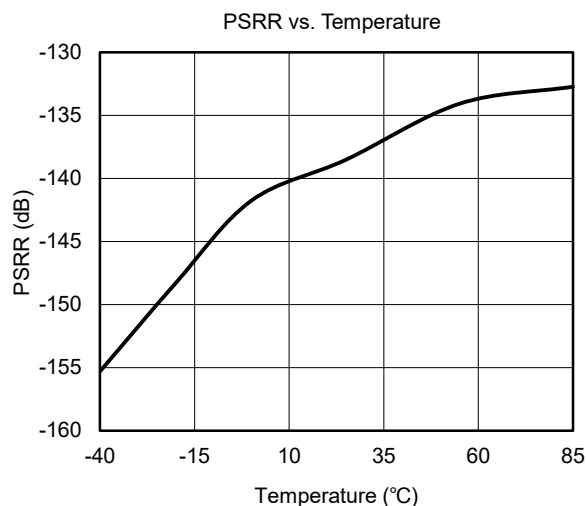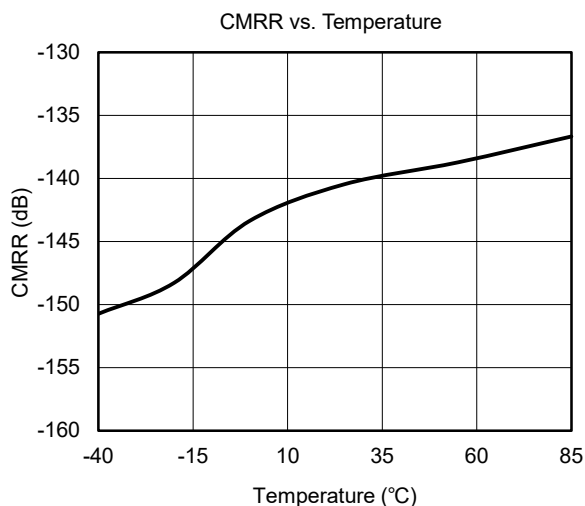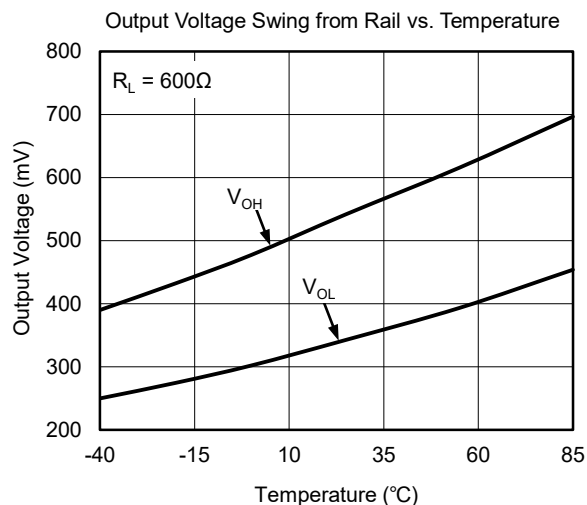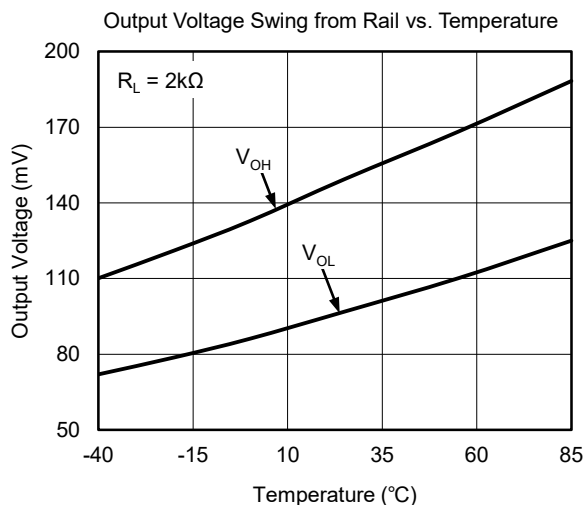





TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = \pm 15\text{V}$ and $R_L = 2\text{k}\Omega$, unless otherwise noted.

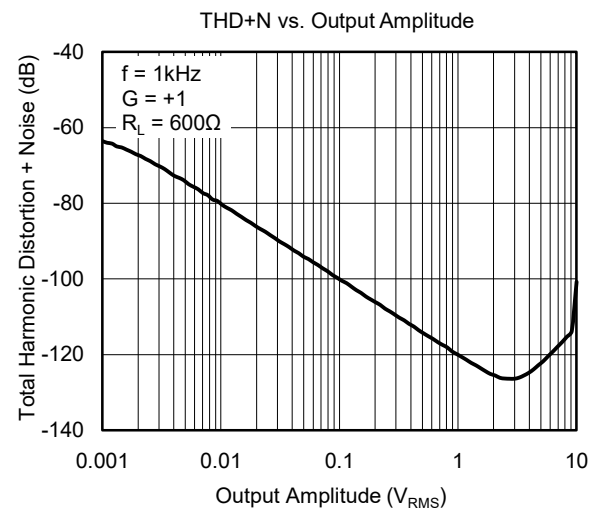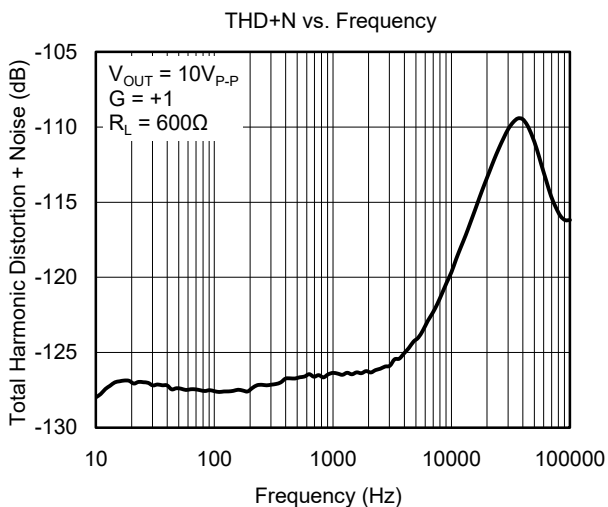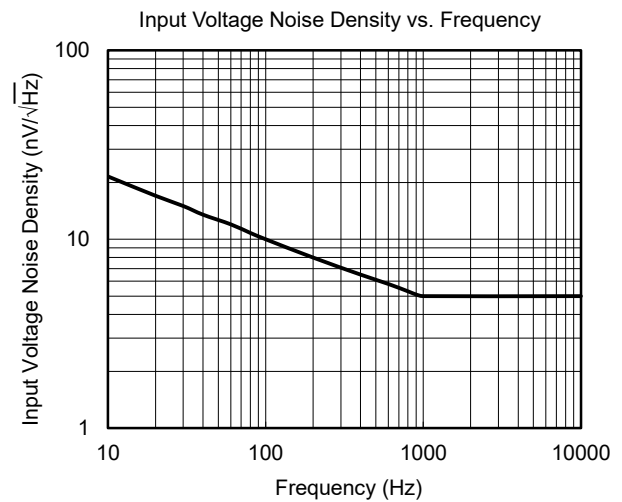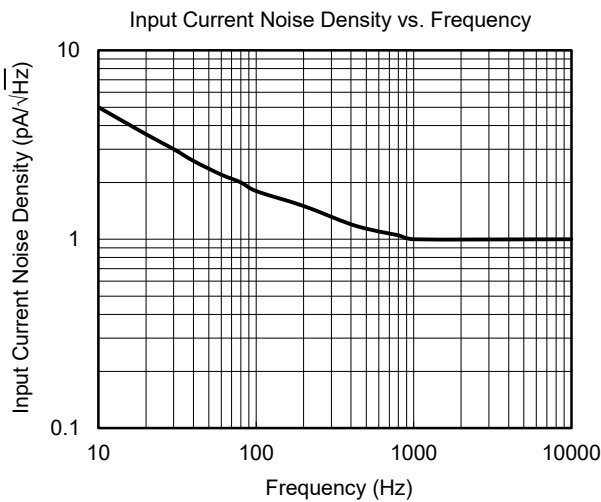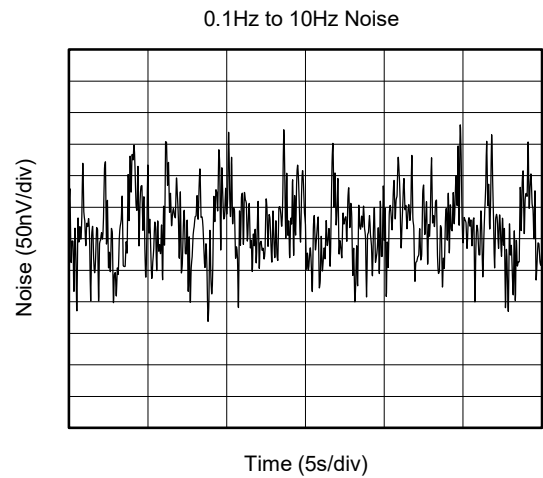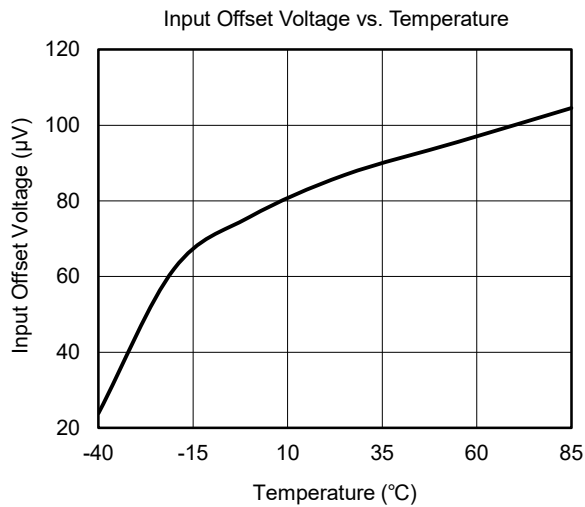

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = \pm 15\text{V}$ and $R_L = 2\text{k}\Omega$, unless otherwise noted.

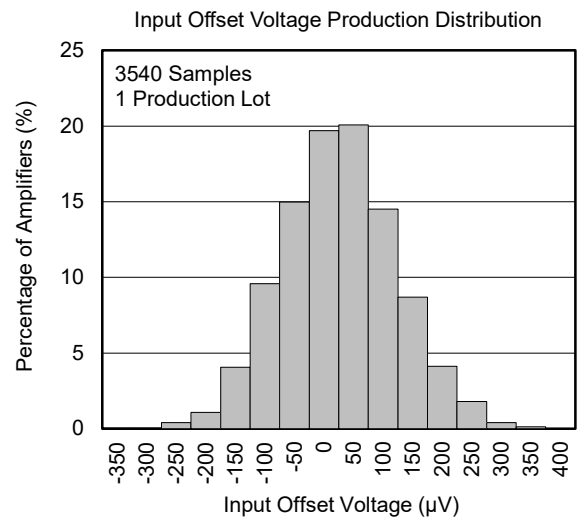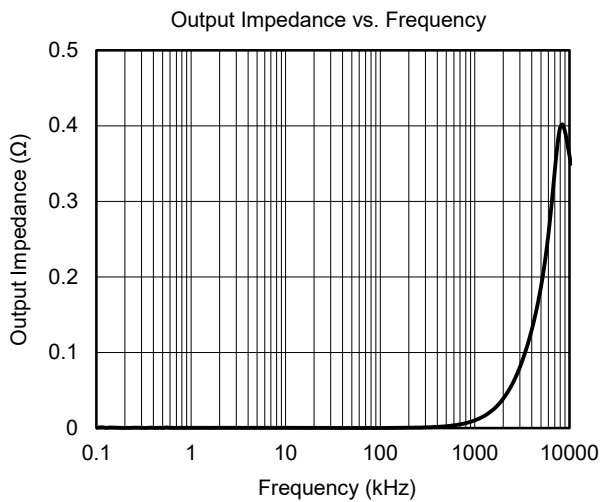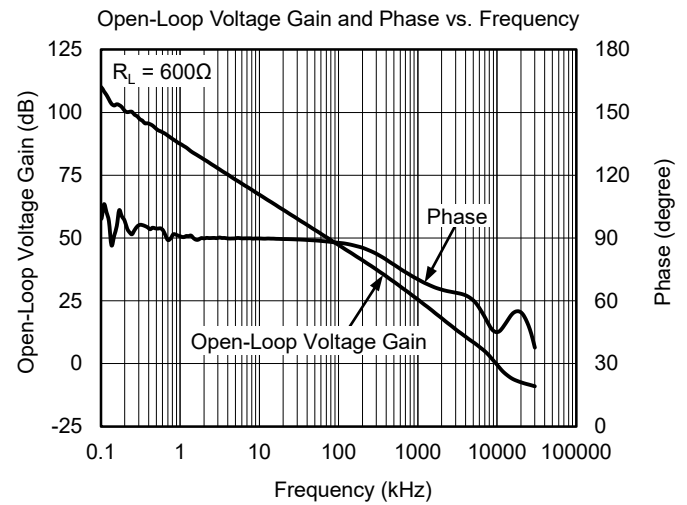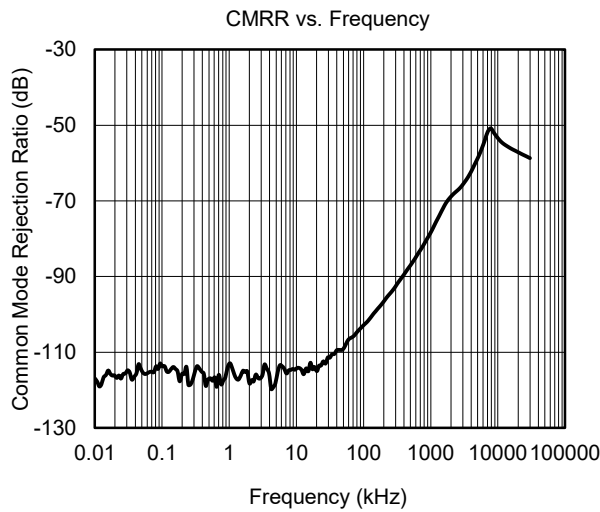

DETAILED DESCRIPTION

The AC and DC characteristics of SGM5532L are excellent since it is a high-performance amplifier. There are a lot of advantages for the device: high output current, high slew rate, high bandwidth for maximum output swing condition, low output noise and distortion. The device also provides ESD diodes to protect the input and has output short-circuit protection. The SGM5532L is unity-gain stable.

Unity-Gain Bandwidth

The definition of unity-gain bandwidth is the maximum supported frequency which can be amplified by an amplifier without distortion. The unity-gain bandwidth of SGM5532L is 9.5MHz.

Common Mode Rejection Ratio

The common mode rejection ratio illustrates the ability of an amplifier to reject the unwanted input common

mode signal. It is defined by the ratio between the change of the input common mode voltage and the change of the input offset voltage in decibels. The CMRR of SGM5532L is 140dB.

Slew Rate

The slew rate is the time period for the output change when input signal is changed. The slew rate of SGM5532L is 18V/ μ s.

Device Functional Modes

The SGM5532L can be operated as it is powered by a DC power supply. The amplifier can be operated in single-supply or dual-supply mode.

APPLICATION INFORMATION

The differential output is required in some specific applications. The following circuit in Figure 1 can convert the 2V to 10V single-ended input signal to $\pm 8V$ output. In order to maximize the linearity of the circuit, the output is limited intentionally. There are two amplifiers in the circuit: the Amplifier A is a buffer and provides V_{OUT+} , the Amplifier B provides V_{OUT-} from an inverting input and a reference voltage. The range of V_{OUT+} and V_{OUT-} is from 2V to 10V so that the V_{DIFF} ($V_{OUT+} - V_{OUT-}$) is ranged from $\pm 8V$.

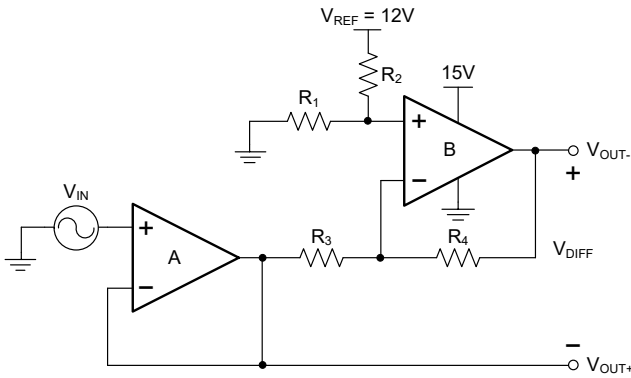


Figure 1. Schematic for Single-Ended Input to Differential Output Conversion

Detailed Design Procedure

The V_{OUT+} and V_{OUT-} of the circuit are generated by the amplified V_{IN} and V_{REF} . V_{OUT+} is connected directly to the buffered V_{IN} so that the relationship is shown in Equation 1. V_{OUT-} is the output of the Amplifier B, which is obtained by adding a reference and amplified the buffered V_{IN} . The relationship among V_{OUT-} , V_{IN} and V_{REF} are shown in Equation 2.

$$V_{OUT+} = V_{IN} \quad (1)$$

$$V_{OUT-} = V_{REF} \times \left(\frac{R_1}{R_1 + R_2} \right) \times \left(1 + \frac{R_4}{R_3} \right) - V_{IN} \times \frac{R_4}{R_3} \quad (2)$$

The V_{DIFF} is the difference between two single-ended outputs, V_{OUT+} and V_{OUT-} . The transfer function between the V_{DIFF} and V_{IN} is shown in Equation 3. For simplification, if $R_1 = R_2$ and $R_3 = R_4$, the signal gain of the Amplifier B is one and the corresponding equation is shown in Equation 6. On the conditions of $R_1 = R_2$ and $R_3 = R_4$, the transfer function can be simply given by Equation 6. For normal operation, the maximum

value of V_{IN} and each output of the amplifier are equal to V_{REF} , which means that the maximum value of the V_{DIFF} is equal to $2V_{REF}$. Moreover, the common mode output voltage is equal to $V_{REF}/2$, as shown in Equation 7.

$$V_{DIFF} = V_{OUT+} - V_{OUT-} = V_{IN} \times \left(1 + \frac{R_4}{R_3} \right) - V_{REF} \times \left(\frac{R_1}{R_1 + R_2} \right) \times \left(1 + \frac{R_4}{R_3} \right) \quad (3)$$

$$V_{OUT+} = V_{IN} \quad (4)$$

$$V_{OUT-} = V_{REF} - V_{IN} \quad (5)$$

$$V_{DIFF} = 2 \times V_{IN} - V_{REF} \quad (6)$$

$$V_{CM} = \left(\frac{V_{OUT+} + V_{OUT-}}{2} \right) = \frac{1}{2} V_{REF} \quad (7)$$

Amplifier Selection

For DC accuracy, the linearity of the amplifier should be taken into consideration. Also, the maximum output swing and the input common mode range are the determination of the linearity, which means that a rail-to-rail amplifier is necessary for the application. On the other hand, the bandwidth should be also taken into account. Because the unity-gain bandwidth of the SGM5532L is 9.5MHz, the circuit can work only for an input signal less than 9.5MHz.

Passive Component Selection

The transfer function of V_{OUT-} is related to the tolerance of the selected resistors, which means that the selected resistors should be kept as less tolerance as possible. For the following design, the selected resistors are 36k Ω with less than 2% tolerance. For those users who care about the noise of the system, the smaller resistance can be taken into account to make sure that the resistor noise is smaller than that of the amplifier.

Power Supply Recommendations

The power supply range for SGM5532L is from $\pm 2.5V$ to $\pm 18V$. Once the power supply voltage exceeds the $\pm 18V$ range, the device will be permanently damaged. For noisy power supply conditions, a 100nF bypass capacitor should be placed close to the power supply pin to reduce any error coupling. Furthermore, the Layout Guidelines section provides more information about the bypass capacitor.

APPLICATION INFORMATION (continued)

Layout

Layout Guidelines

The following layout suggestions should be considered for good performance:

- Noise from the power supply is propagated through the amplifier and degrades the performance of the corresponding circuit. A bypass capacitor is necessary for reducing the influence of the noise and providing a low-impedance path for the noise component.
- A 100nF low ESR, ceramic bypass capacitor should be placed as close as possible to the power supply pin of SGM5532L. For the single-supply applications, the bypass capacitor should be placed between $+V_S$ and GND.
- For decreasing the influence of the noise, the analog and digital ground should be separated. The GND planes are usually used in the application of multi-layer layout, which can reduce the EMI and noise pickup. The analog and digital ground should be separated physically, and the direction of the ground current should be also taken into consideration.
- The distance between the input traces and the power supply traces should be maximized to reduce the parasitic coupling. However, if the sensitive traces are impossible to be kept away from the noisy trace, place them perpendicular to the noisy traces.

- The external devices (resistors or capacitors) should be kept as close as possible to the SGM5532L. To minimize the impact of parasitic capacitance, the R_F and R_G should be placed as close as possible to the inverting input pin, as shown in Figure 2 and Figure 3.
- For PCB layout, the input traces should be designed as short as possible to avoid any parasitic capacitor as the input trace is the most sensitive part.
- The low-impedance guard ring could be taken into account around the critical traces of the circuit, which can decrease the leakage currents from the nearby traces.

Layout Example

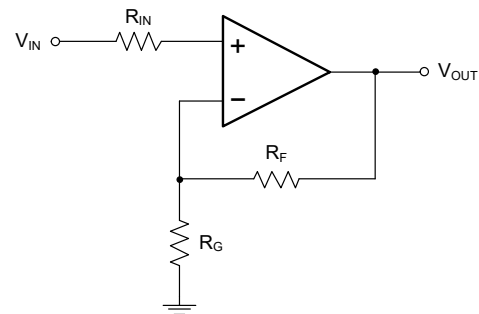


Figure 2. Non-Inverting Operational Amplifier Schematic

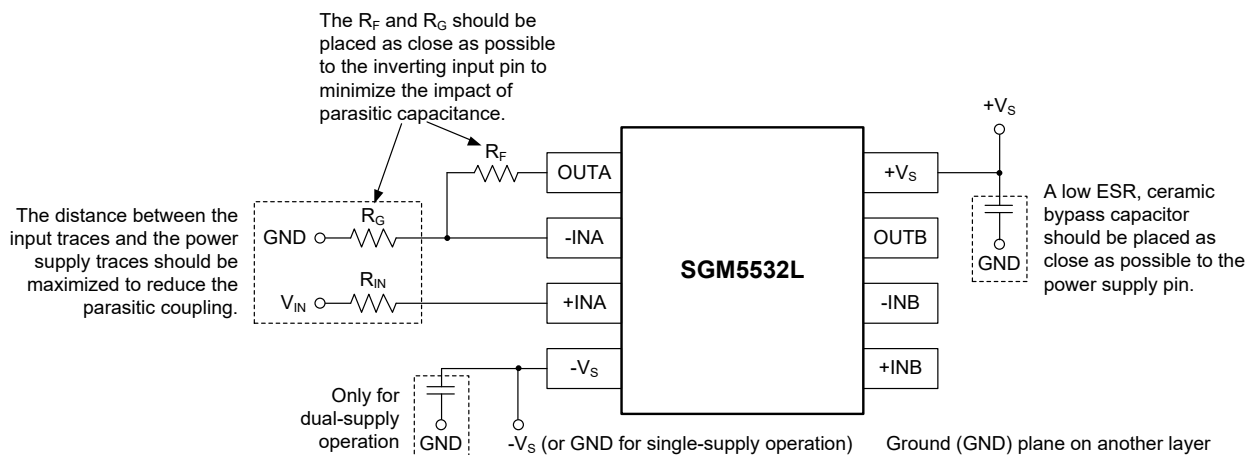


Figure 3. Non-Inverting Operational Amplifier Board Layout


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (NOVEMBER 2022) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS

SOIC-8

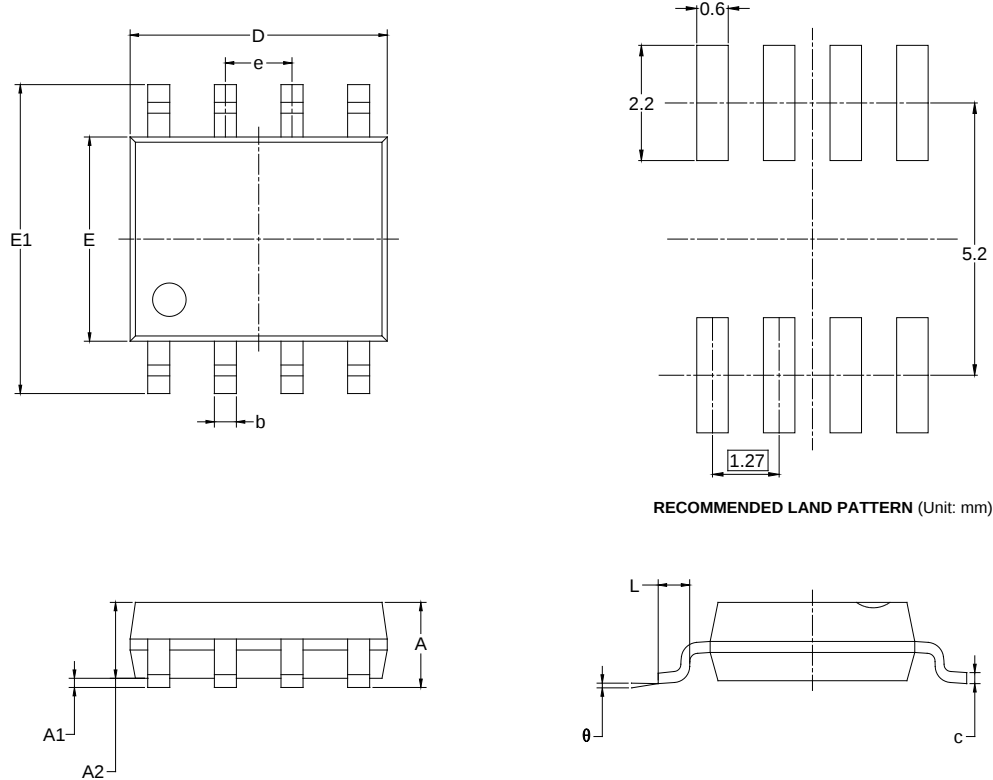

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°


NOTES:

1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

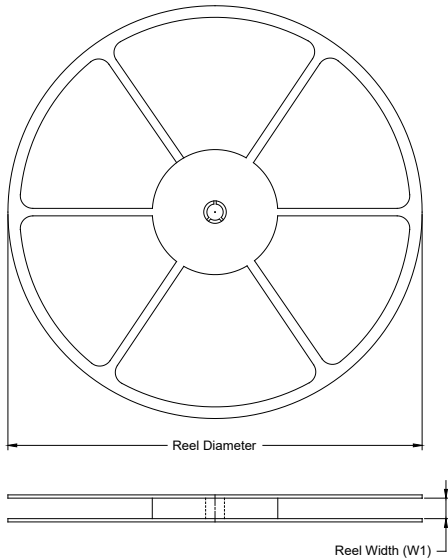

TAPE DIMENSIONS

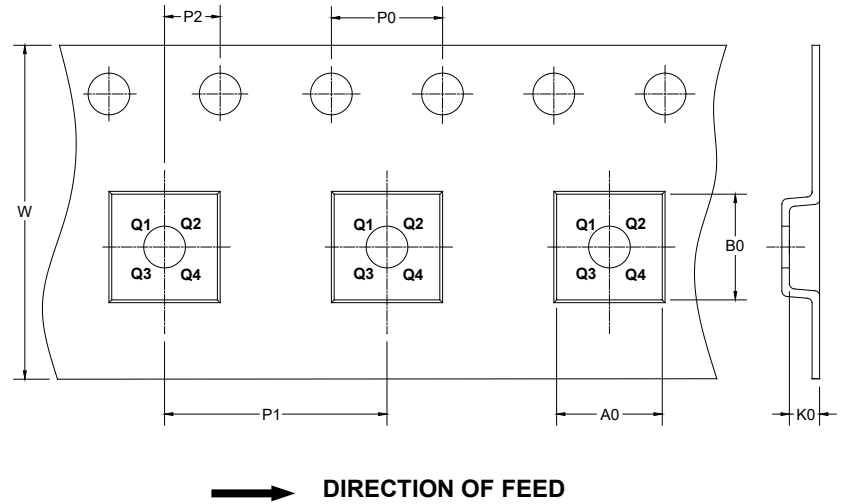

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOIC-8	13"	12.4	6.40	5.40	2.10	4.0	8.0	2.0	12.0	Q1

DD00001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

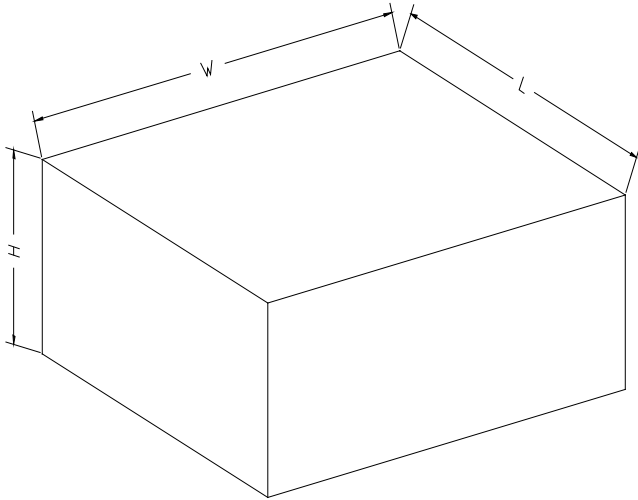

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002