

## Arduino Uno R3

## ARDUINO UNO-R3 PHYSICAL COMPONENTS

### ATMEGA328P-PU microcontroller

The most important element in Arduino Uno R3 is ATMEGA328P-PU is an 8-bit Microcontroller with flash memory reach to 32k bytes. It's features as follow:

- High Performance, Low Power AVR
- Advanced RISC Architecture
  - 131 Powerful Instructions – Most Single Clock Cycle Execution
  - 32 x 8 General Purpose Working Registers
  - Up to 20 MIPS Throughput at 20 MHz
  - On-chip 2-cycle Multiplier
- High Endurance Non-volatile Memory Segments
  - 4/8/16/32K Bytes of In-System Self-Programmable Flash program memory
  - 256/512/512/1K Bytes EEPROM
  - 512/1K/1K/2K Bytes Internal SRAM
  - Write/Erase Cycles: 10,000 Flash/100,000 EEPROM
  - Data retention: 20 years at 85°C/100 years at 25°C
  - Optional Boot Code Section with Independent Lock Bits
  - In-System Programming by On-chip Boot Program
  - True Read-While-Write Operation
  - Programming Lock for Software Security
- Peripheral Features
  - Two 8-bit Timer/Counters with Separate Prescaler and Compare Mode
  - One 16-bit Timer/Counter with Separate Prescaler, Compare Mode, and Capture Mode
  - Real Time Counter with Separate Oscillator
  - Six PWM Channels
  - 8-channel 10-bit ADC in TQFP and QFN/MLF package
  - Temperature Measurement
  - 6-channel 10-bit ADC in PDIP Package
  - Temperature Measurement
  - Programmable Serial USART

- Master/Slave SPI Serial Interface
- Byte-oriented 2-wire Serial Interface (Philips I2 C compatible)
- Programmable Watchdog Timer with Separate On-chip Oscillator
- On-chip Analog Comparator
- Interrupt and Wake-up on Pin Change

- **Special Microcontroller Features**

- Power-on Reset and Programmable Brown-out Detection
- Internal Calibrated Oscillator
- External and Internal Interrupt Sources
- Six Sleep Modes: Idle, ADC Noise Reduction, Power-save, Power-down, Standby, and Extended Standby

- **I/O and Packages**

- 23 Programmable I/O Lines
- 28-pin PDIP, 32-lead TQFP, 28-pad QFN/MLF and 32-pad QFN/MLF

- **Operating Voltage:**

- 1.8 - 5.5V

- **Temperature Range:**

- -40°C to 85°C

- **Speed Grade:**

- 0 - 4 MHz@1.8 - 5.5V, 0 - 10 MHz@2.7 - 5.5V, 0 - 20 MHz @ 4.5 - 5.5V

- **Power Consumption at 1 MHz, 1.8V, 25°C**

- Active Mode: 0.2 mA
- Power-down Mode: 0.1  $\mu$ A
- Power-save Mode: 0.75  $\mu$ A (Including 32 kHz RTC)

تهیه و توزیع قطعات الکترونیک

- Pin configuration

(PCINT14/RESET) PC6	1	28	PC5 (ADC5/SCL/PCINT13)
(PCINT16/RXD) PD0	2	27	PC4 (ADC4/SDA/PCINT12)
(PCINT17/TXD) PD1	3	26	PC3 (ADC3/PCINT11)
(PCINT18/INT0) PD2	4	25	PC2 (ADC2/PCINT10)
(PCINT19/OC2B/INT1) PD3	5	24	PC1 (ADC1/PCINT9)
(PCINT20/XCK/T0) PD4	6	23	PC0 (ADC0/PCINT8)
VCC	7	22	GND
GND	8	21	AREF
(PCINT6/XTAL1/TOSC1) PB6	9	20	AVCC
(PCINT7/XTAL2/TOSC2) PB7	10	19	PB5 (SCK/PCINT5)
(PCINT21/OC0B/T1) PD5	11	18	PB4 (MISO/PCINT4)
(PCINT22/OC0A/AIN0) PD6	12	17	PB3 (MOSI/OC2A/PCINT3)
(PCINT23/AIN1) PD7	13	16	PB2 ( $\overline{SS}$ /OC1B/PCINT2)
(PCINT0/CLKO/ICP1) PB0	14	15	PB1 (OC1A/PCINT1)

### ATMEGA16u2- mu microcontroller

Is a 8-bit microcontroller used as USB driver in Arduino uno R3 it's features as follow:

- High Performance, Low Power AVR
- Advanced RISC Architecture
  - 125 Powerful Instructions – Most Single Clock Cycle Execution
  - 32 x 8 General Purpose Working Registers
  - Fully Static Operation
  - Up to 16 MIPS Throughput at 16 MHz

- Non-volatile Program and Data Memories

- 8K/16K/32K Bytes of In-System Self-Programmable Flash
- 512/512/1024 EEPROM
- 512/512/1024 Internal SRAM
- Write/Erase Cycles: 10,000 Flash/ 100,000 EEPROM
- Data retention: 20 years at 85°C/ 100 years at 25°C



- Optional Boot Code Section with Independent Lock Bits
- In-System Programming by on-chip Boot Program hardware-activated after reset
- Programming Lock for Software Security

- **USB 2.0 Full-speed Device Module with Interrupt on Transfer Completion**

- Complies fully with Universal Serial Bus Specification REV 2.0
- 48 MHz PLL for Full-speed Bus Operation: data transfer rates at 12 Mbit/s
- Fully independent 176 bytes USB DPRAM for endpoint memory allocation
- Endpoint 0 for Control Transfers: from 8 up to 64-bytes
- 4 Programmable Endpoints:
  - IN or Out Directions
  - Bulk, Interrupt and Isochronous Transfers
  - Programmable maximum packet size from 8 to 64 bytes
  - Programmable single or double buffer
- Suspend/Resume Interrupts
- Microcontroller reset on USB Bus Reset without detach
- USB Bus Disconnection on Microcontroller Request

- **Peripheral Features**

- One 8-bit Timer/Counters with Separate Prescaler and Compare Mode (two 8-bit PWM channels)
- One 16-bit Timer/Counter with Separate Prescaler, Compare and Capture Mode (three 8-bit PWM channels)
- USART with SPI master only mode and hardware flow control (RTS/CTS)
- Master/Slave SPI Serial Interface
- Programmable Watchdog Timer with Separate On-chip Oscillator
- On-chip Analog Comparator
- Interrupt and Wake-up on Pin Change

- **On Chip Debug Interface (debug WIRE)**

- **Special Microcontroller Features**

- Power-On Reset and Programmable Brown-out Detection
- Internal Calibrated Oscillator
- External and Internal Interrupt Sources
- Five Sleep Modes: Idle, Power-save, Power-down, Standby, and Extended Standby

- **I/O and Packages**

- 22 Programmable I/O Lines
- QFN32 (5x5mm) / TQFP32 packages

- Operating Voltages

- 2.7 - 5.5V


- Operating temperature

- Industrial (-40°C to +85°C)

- Maximum Frequency

- 8 MHz at 2.7V - Industrial range
- 16 MHz at 4.5V - Industrial range

- Pin configuration

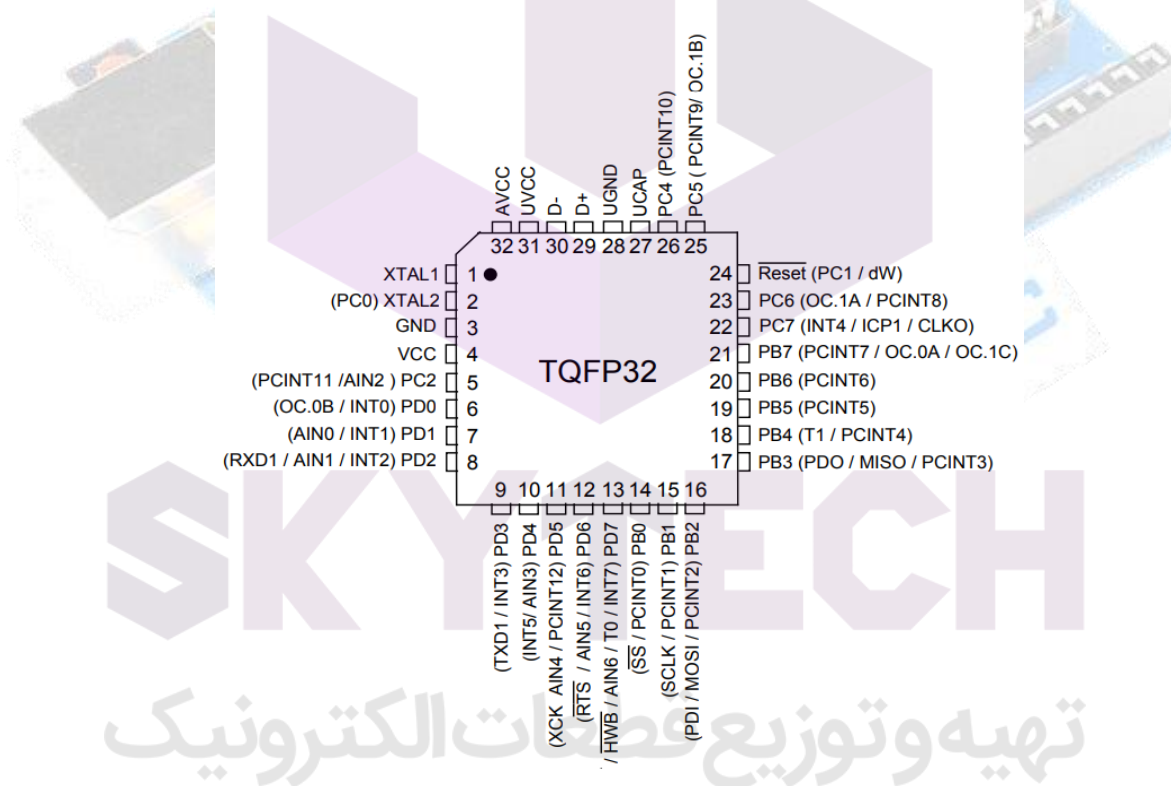

## OTHER ARDUINO UNO R3 PARTS

### Input and Output

Each of the 14 digital pins on the Uno can be used as an input or output, using `pinMode()`, `digitalWrite()`, and `digitalRead()` functions. They operate at 5 volts. Each pin can provide or receive a maximum of 40 mA and has an internal pull-up resistor (disconnected by default) of 20-50 k Ohms. In addition, some pins have specialized functions:

- Serial: 0 (RX) and 1 (TX). Used to receive (RX) and transmit (TX) TTL serial data. These pins are connected to the corresponding pins of the ATmega8U2 USB-to-TTL Serial chip.
- External Interrupts: 2 and 3. These pins can be configured to trigger an interrupt on a low value, a rising or falling edge, or a change in value.
- PWM: 3, 5, 6, 9, 10, and 11. Provide 8-bit PWM output with the `analogWrite()` function.
- SPI: 10 (SS), 11 (MOSI), 12 (MISO), 13 (SCK). These pins support SPI communication using the SPI library.
- LED: 13. There is a built-in LED connected to digital pin 13. When the pin is HIGH value, the LED is on, when the pin is LOW, it's off.


The Uno has 6 analog inputs, labeled A0 through A5, each of which provide 10 bits of resolution (i.e. 1024 different values). By default they measure from ground to 5 volts, though it is possible to change the upper end of their range using the AREF pin and the `analogReference()` function. Additionally, some pins have specialized functionality:

- TWI: A4 or SDA pin and A5 or SCL pin. Support TWI communication using the Wire library.


There are a couple of other pins on the board:

- AREF: Reference voltage for the analog inputs. Used with `analogReference()`.
- Reset: Bring this line LOW to reset the microcontroller. Typically used to add a reset button to shields which block the one on the board.

# ARDUINO UNO R3 SCHEMATIC DIAGRAM

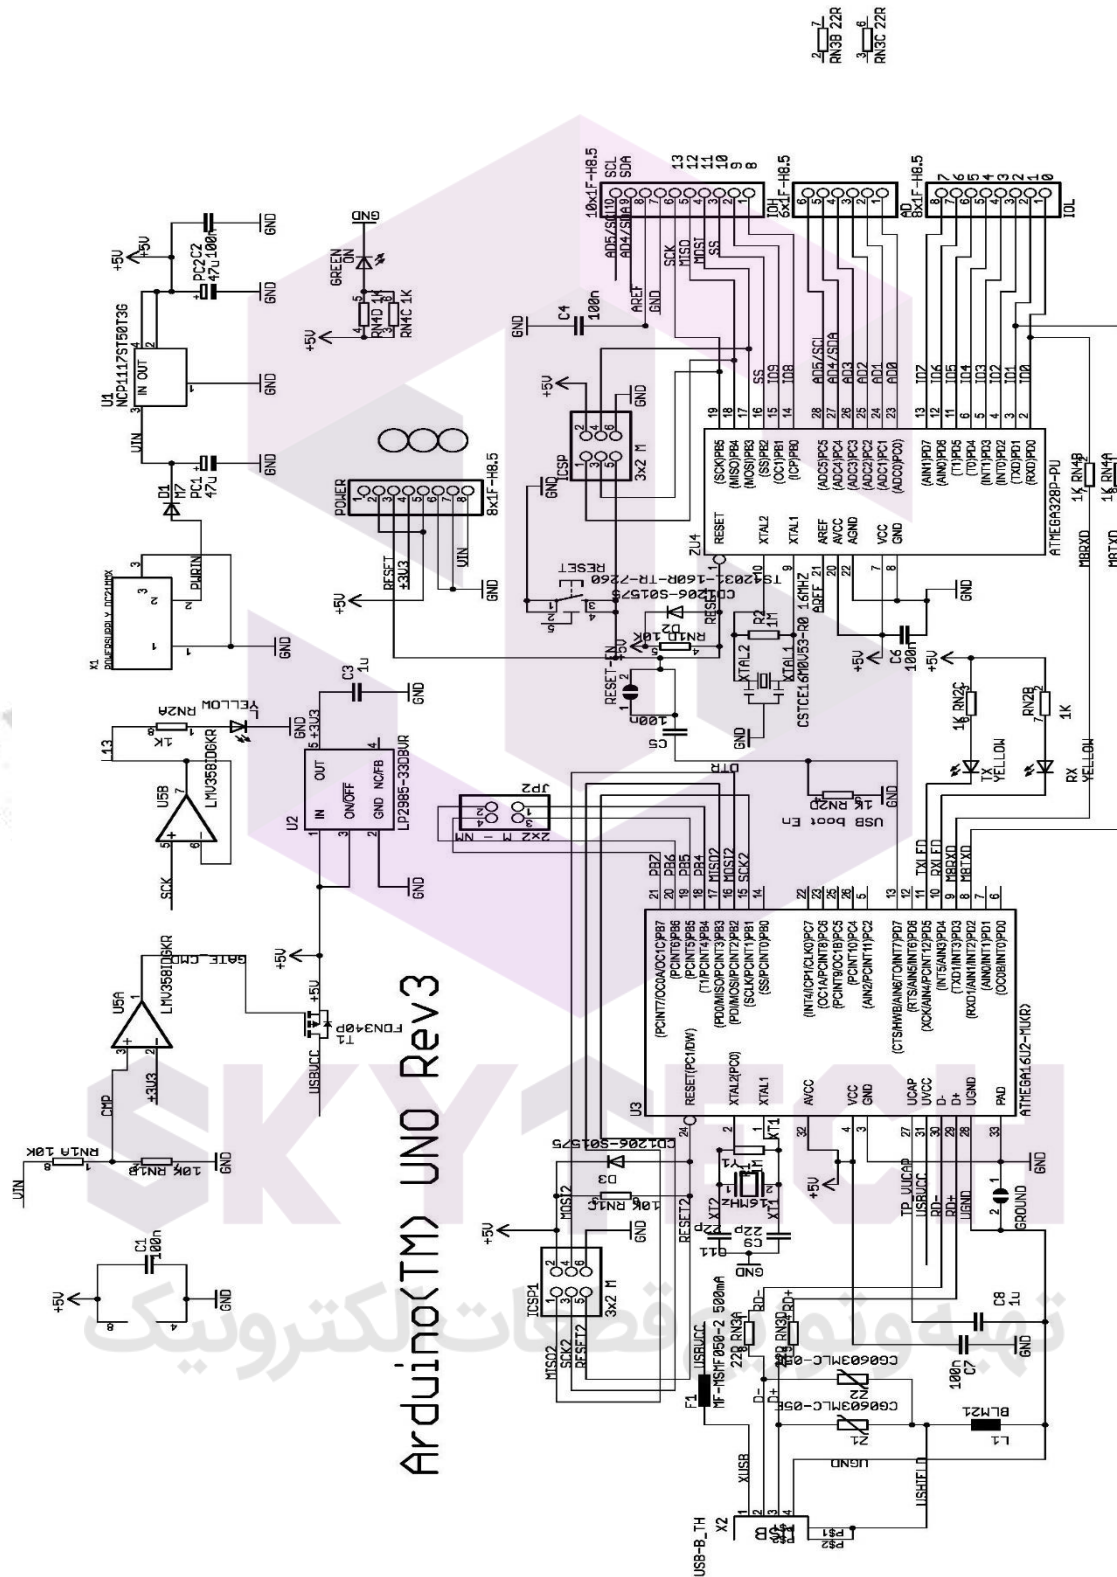



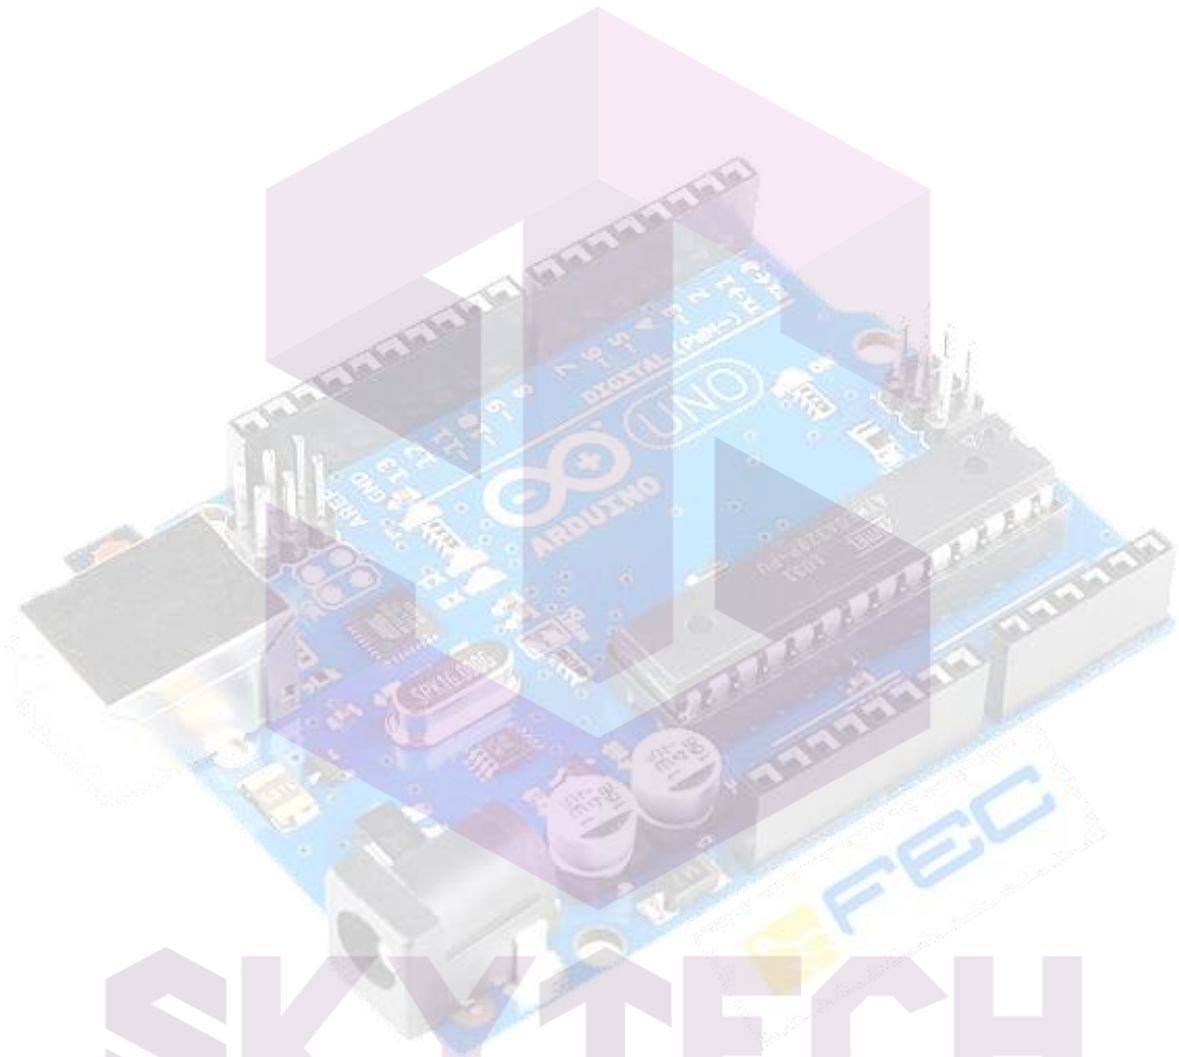

# SKYTECH

تهیه و توزیع قطعات الکترونیک