

# SIDAC

(95 - 330 Volts)

## General Description

The Sidac is a silicon bilateral voltage triggered switch with greater power-handling capabilities than standard diacs. Upon application of a voltage exceeding the Sidac breakover voltage point, the Sidac switches on through a negative resistance region to a low on-state voltage. Conduction will continue until the current is interrupted or drops below the minimum holding current of the device.

Teccor offers the complete voltage range (95-330) over three different packages:

- TO-92 (95-280 volts)
- Axial lead DO-15X (95-280 volts)
- Surface Mount DO-214AA (95-280 volts)
- TO-202AB (190-330 volts)

Teccor's Sidacs feature glass passivated junctions to ensure a rugged and dependable device capable of withstanding harsh environments.

Variations of devices covered in this data sheet are available for custom design applications. Please consult the factory for more information.





## Applications

- High voltage lamp ignitors
- Natural gas ignitors
- Gas oil ignitors
- High voltage power supplies
- Xenon ignitors
- Over voltage protector
- Pulse generators
- Fluorescent lighting ignitors
- HID lighting ignitors

## Features

- AC circuit oriented
- Glass-passivated junctions
- High surge current capability

# Electrical Specifications

| Type | Part No.  |  |  |  | $I_{T(RMS)}$   | $V_{DRM}$                                  | $V_{BO}$                                      |     | $I_{DRM}$   | $I_{BO}$                                     |
|------|---|--|--|--|--|--|---|-----|---|--|
|      | <br>TO-92<br>E Package | <br>DO-15X<br>G Package | <br>TO-202AB<br>F Package | <br>DO-214AA<br>S Package | On-State<br>RMS Current<br>$T_J \leq 125^\circ\text{C}$<br>50/60Hz<br>Sine Wave<br>(7) (8) | Repetitive<br>Peak<br>Off-State<br>Voltage | Breakover Voltage<br>50/60Hz Sine Wave<br>(1) |     | Repetitive<br>Peak<br>Off-State<br>Current<br>50/60Hz<br>Sine Wave<br>$V = V_{DRM}$ | Breakover<br>Current<br>50/60Hz<br>Sine Wave |
|      |   |  |  |  | Amps   | Volts                                      | Volts   |     | $\mu\text{Amps}$  | $\mu\text{Amps}$                             |
|      | See "Package Dimensions" section for variations.  |  |  |  | MAX  | MIN  | MIN   | MAX | MAX   | MAX  |
|      | K1050E70  | K1050G   |  | K1050S   | 1.0  | $\pm 90$                                   | 95  | 113 | 5   | 10   |
|      | K1100E70  | K1100G   |  | K1100S   | 1.0  | $\pm 90$                                   | 104   | 118 | 5   | 10   |
|      | K1200E70  | K1200G   |  | K1200S   | 1.0  | $\pm 90$                                   | 110   | 125 | 5   | 10   |
|      | K1300E70  | K1300G   |  | K1300S   | 1.0  | $\pm 90$                                   | 120   | 138 | 5   | 10   |
|      | K1400E70  | K1400G   |  | K1400S   | 1.0  | $\pm 90$                                   | 130   | 146 | 5   | 10   |
|      | K1500E70  | K1500G   |  | K1500S   | 1.0  | $\pm 90$                                   | 140   | 170 | 5   | 10   |
|      | K2000E70  | K2000G   | K2000F1  | K2000S   | 1.0  | $\pm 180$                                  | 190   | 215 | 5   | 10   |
|      | K2200E70  | K2200G   | K2200F1  | K2200S   | 1.0  | $\pm 180$                                  | 205   | 230 | 5   | 10   |
|      | K2400E70  | K2400G   | K2400F1  | K2400S   | 1.0  | $\pm 190$                                  | 220   | 250 | 5   | 10   |
|      |   |  | K2401F1  |  | 1.0 (10)   | $\pm 190$                                  | 220   | 250 | 5   | 10   |
|      | K2500E70  | K2500G   | K2500F1  | K2500S   | 1.0  | $\pm 190$                                  | 240   | 280 | 5   | 10   |
|      |   |  | K3000F1  |  | 1.0  | $\pm 190$                                  | 270   | 330 | 5   | 10   |


## General Notes

- All measurements are made at 60Hz with a resistive load at an ambient temperature of  $+25^\circ\text{C}$  unless otherwise specified.
- Storage temperature range ( $T_S$ ) is  $-65^\circ\text{C}$  to  $+150^\circ\text{C}$ .
- The case ( $T_C$ ) or lead ( $T_L$ ) temperature is measured as shown on the dimensional outline drawings. See "Package Dimensions" section of this catalog.
- Junction temperature range ( $T_J$ ) is  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ .
- Lead solder temperature is a maximum of  $+230^\circ\text{C}$  for 10 seconds maximum;  $\geq 1/16"$  (1.59mm) from case.

## Electrical Specification Notes

- See Figure 9.6 for  $V_{BO}$  change vs junction temperature.
- See Figure 9.7 for  $I_{BO}$  vs junction temperature.
- See Figure 9.2 for  $I_H$  vs case temperature.
- See Figure 9.14 for test circuit.
- See Figure 9.1 for more than one full cycle rating.
- $R_{\theta JA}$  for TO-202 Type 23 and Type 41 is  $70^\circ\text{C}/\text{watt}$ .
- $T_C \leq 90^\circ\text{C}$  for TO-92 Sidac and  $T_C \leq 105^\circ\text{C}$  for TO-202 Sidacs.  $T_L \leq 100^\circ\text{C}$  for DO-15X and  $T_L \leq 90^\circ\text{C}$  for DO-214AA.
- See Figure 9.15 for clarification of Sidac operation.
- For best Sidac operation, the load impedance should be near or less than switching resistance.
- Teccor's new, improved series of sidacs is designed to ensure good commutation at higher switching frequencies as required in ignitor circuits for high intensity discharge (HID) lighting. A typical circuit for a metal halide lamp ignitor is shown in the schematic, Figure 9.3. With proper component selection this circuit will produce three pulses for ignition of Osram lamp types such as HQI-T70W, HQI-T150W, and HQI-T250W which require a minimum of three pulses at 4kV magnitude and  $>1\mu\text{s}$  duration each at a minimum repetition rate of 3.3kHz.

| $I_H$   |     | $V_{TM}$  |     |     |     | $I_{TSM}$   |      | $R_S$  | $dV_Q/dt$   | $dv/dt$   | $di/dt$  |
|---|-----|---|-----|-----|-----|---|------|--|---|---|--|
| Dynamic Holding Current<br>50/60Hz Sine Wave<br>$R = 100\Omega$<br>(3) (4)<br><br>mAmps |     | Peak On-State Voltage<br>$I_T = 1$ Amp<br><br>Volts Max |     |     |     | Peak One Cycle Surge Current<br>50/60Hz Sine Wave (Non-Repetitive)<br>(5)<br><br>Amps |      | Switching Resistance<br><br>$R_S = \frac{(V_{BO} - V_S)}{(I_S - I_{BO})}$<br><br>50/60Hz Sine Wave (9)<br><br>k $\Omega$ | Critical Rate-of-Rise of Turn-off Voltage at 8kHz<br><br>Volts/ $\mu$ Sec | Critical Rate-of-Rise of Off-State Voltage at Rated $V_{DRM}$<br>$T_J \leq 100^\circ C$<br><br>Volts/ $\mu$ Sec | Critical Rate-of-Rise of On-State Current<br><br>Amps/ $\mu$ Sec |
|   |     | Package   |     |     |     | 60Hz  | 50Hz |  |   |   |  |
| TYP   | MAX | E   | G   | F   | S   |   |      | MIN  | MIN   | MIN   | TYP  |
| 60  | 150 | 1.5   | 1.5 |     | 1.5 | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |
| 60  | 150 | 1.5   | 1.5 |     | 1.5 | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |
| 60  | 150 | 1.5   | 1.5 |     | 1.5 | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |
| 60  | 150 | 1.5   | 1.5 |     | 1.5 | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |
| 60  | 150 | 1.5   | 1.5 |     | 1.5 | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |
| 60  | 150 | 1.5   | 1.5 |     | 1.5 | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |
| 60  | 150 | 1.5   | 1.5 | 3.0 | 1.5 | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |
| 60  | 150 | 1.5   | 1.5 | 3.0 | 1.5 | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |
| 60  | 150 | 1.5   | 1.5 | 3.0 | 1.5 | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |
| 60  | 150 | 1.5   | 1.5 | 3.0 |     | 20  | 16.7 | 2.0  | 42  | 1500  | 150  |
| 60  | 150 | 1.5   | 1.5 | 3.0 | 1.5 | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |
| 60  | 150 |   |     | 3.0 |     | 20  | 16.7 | 0.1  | 20  | 1500  | 150  |

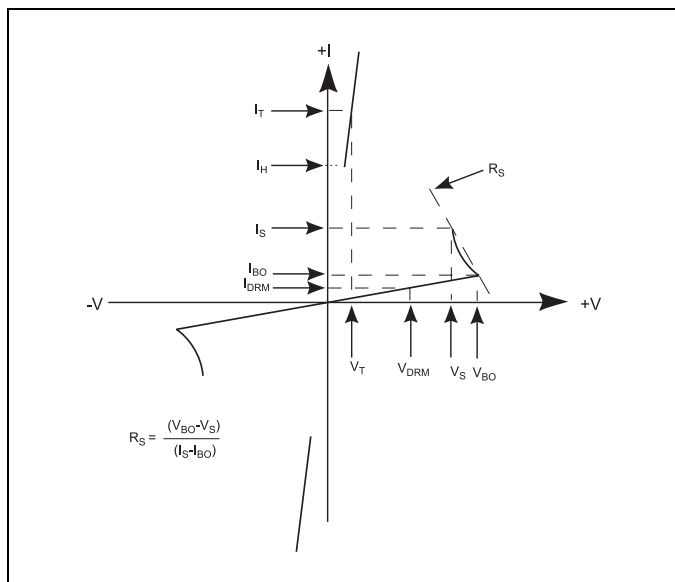

V-I Characteristics

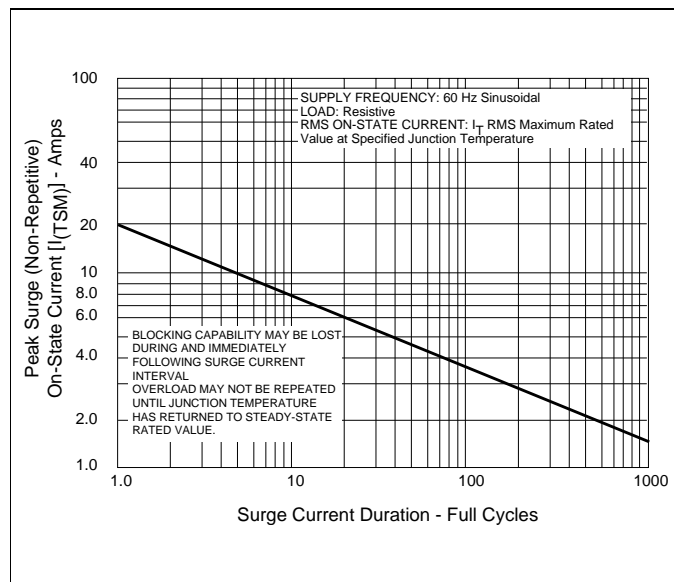


Figure 9.1 Peak Surge Current vs Surge Current Duration

| THERMAL RESISTANCE (STEADY STATE)<br>$R_{\theta JC}$ [ $R_{\theta JA}$ ] $^\circ C/W$ (TYPICAL) |         |        |         |
|---|---------|--------|---------|
|   |         |        |         |
| 35 [95]   | 18 [75] | 7 [45] | 30 [85] |

# Electrical Specifications

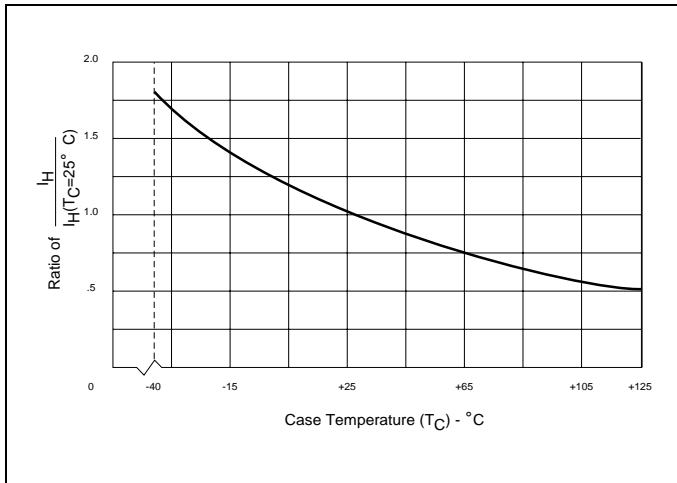


Figure 9.2 Normalized DC Holding Current vs Case/Lead Temperature

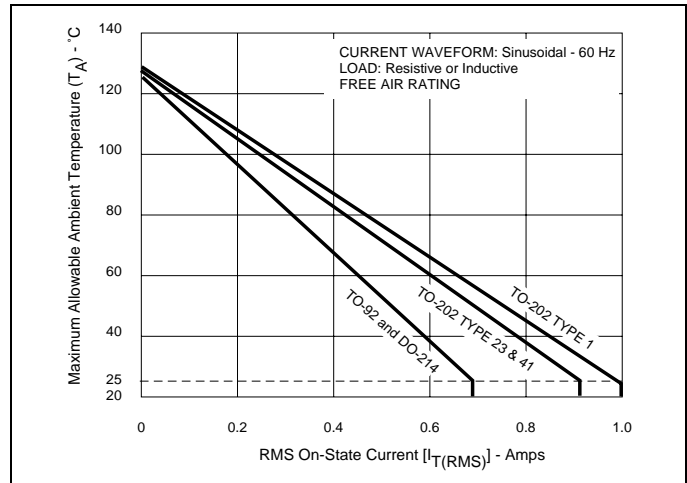


Figure 9.5 Maximum Allowable Ambient Temperature vs On-State Current

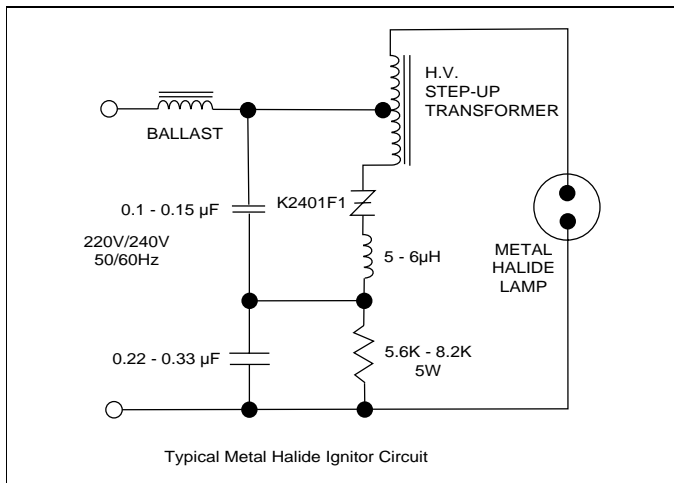


Figure 9.3 Typical Metal Halide Ignitor Circuit

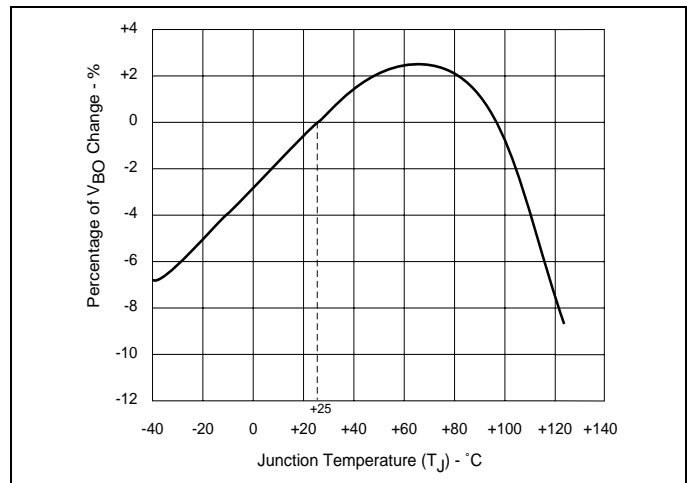


Figure 9.6 Normalized  $V_{BO}$  Change vs Junction Temperature

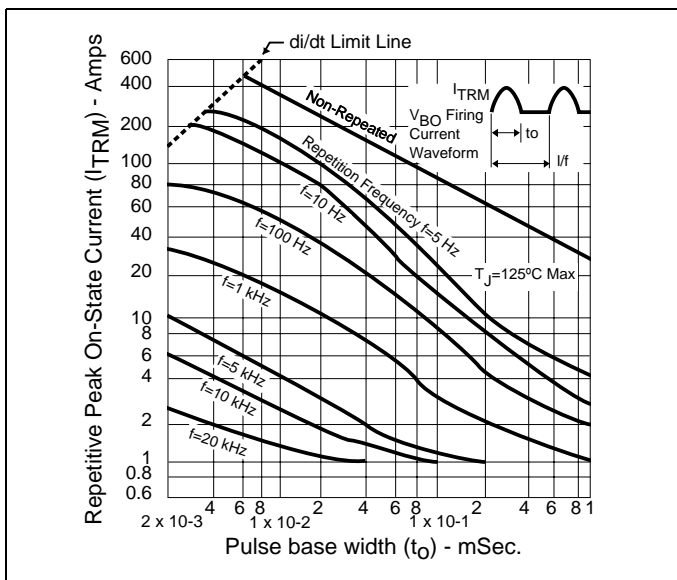


Figure 9.4 Repetitive Peak On-State Current ( $I_{TRM}$ ) vs Pulse Width at Various Frequencies

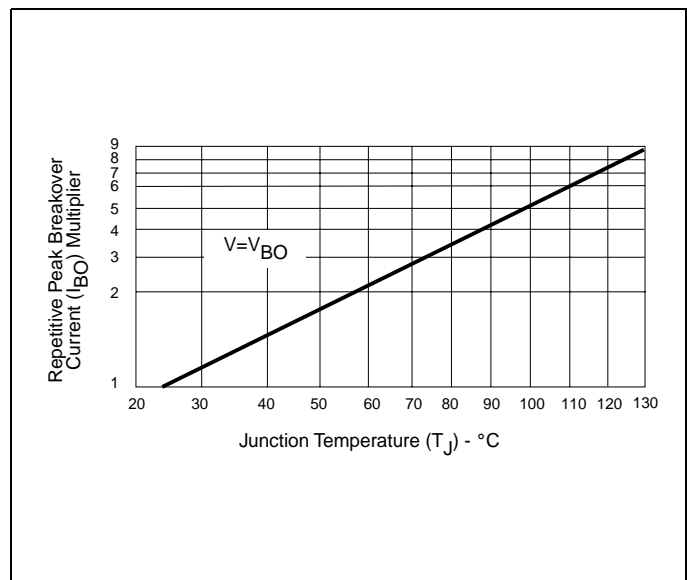


Figure 9.7 Normalized Repetitive Peak Breakover Current vs Junction Temperature

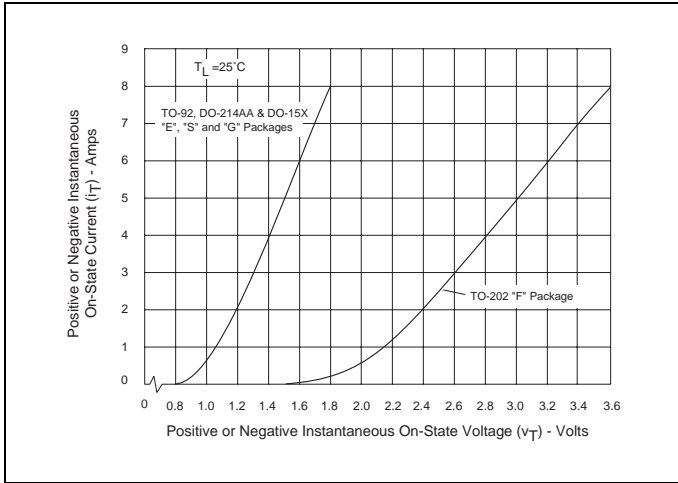


Figure 9.8 On-State Current vs On-State Voltage (Typical)

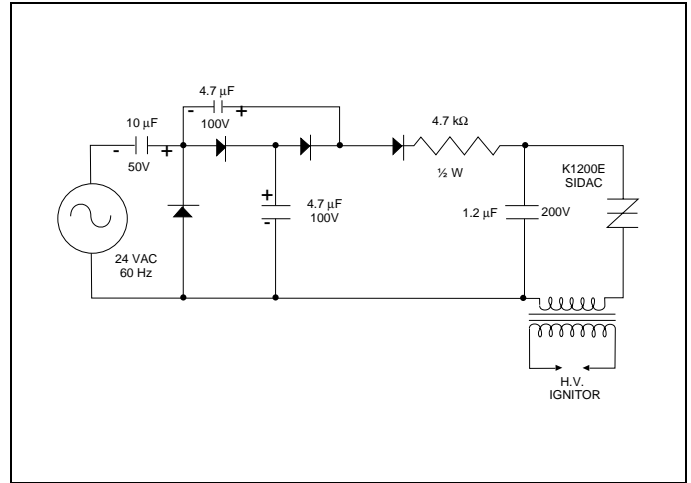


Figure 9.11 Ignitor Circuit (Low Voltage Input)

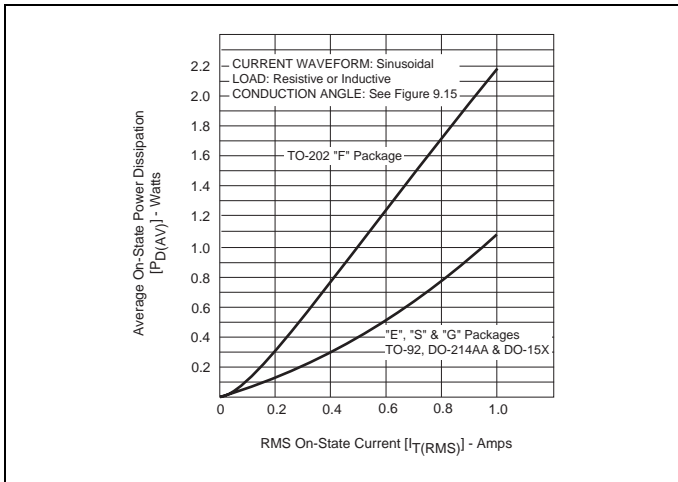


Figure 9.9 Power Dissipation (Typical) vs On-State Current

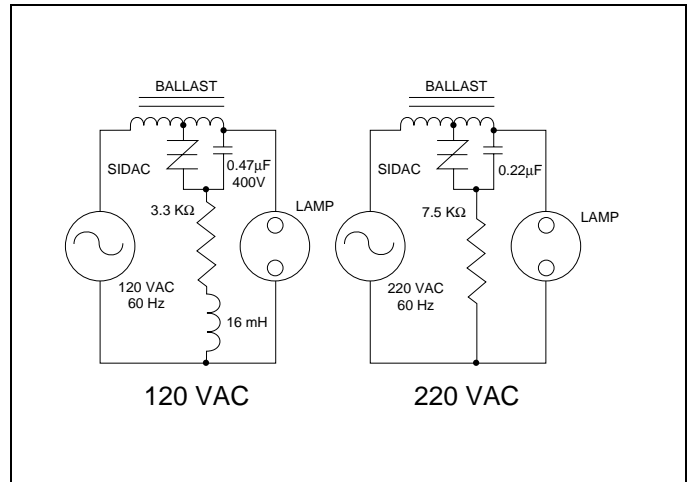


Figure 9.12 Typical High Pressure Sodium Lamp Firing Circuit

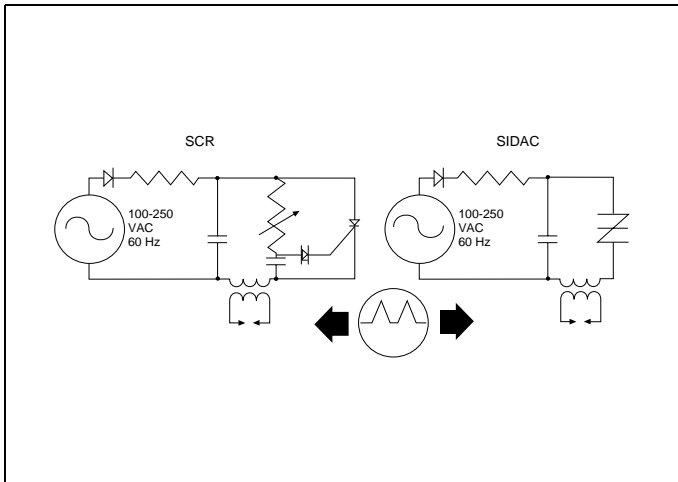


Figure 9.10 Comparison of Sidac vs SCR

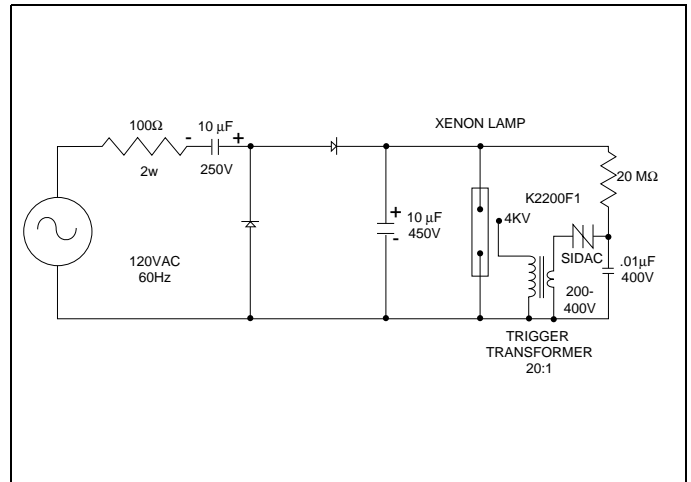


Figure 9.13 Xenon Lamp Flashing Circuit

# Electrical Specifications

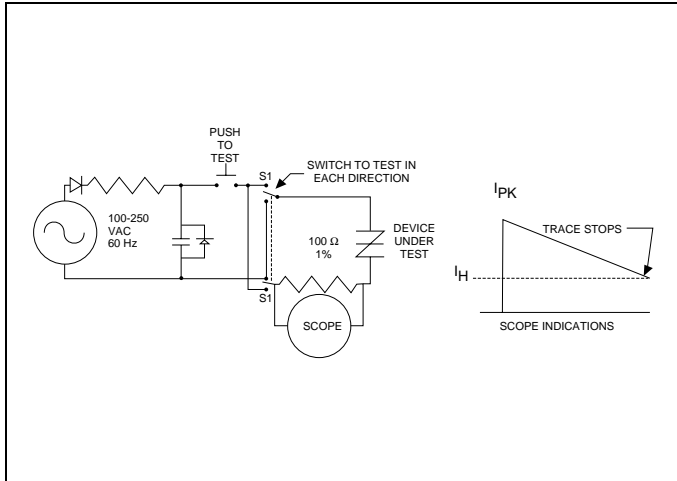


Figure 9.14 Dynamic Holding Current Test Circuit for Sidacs

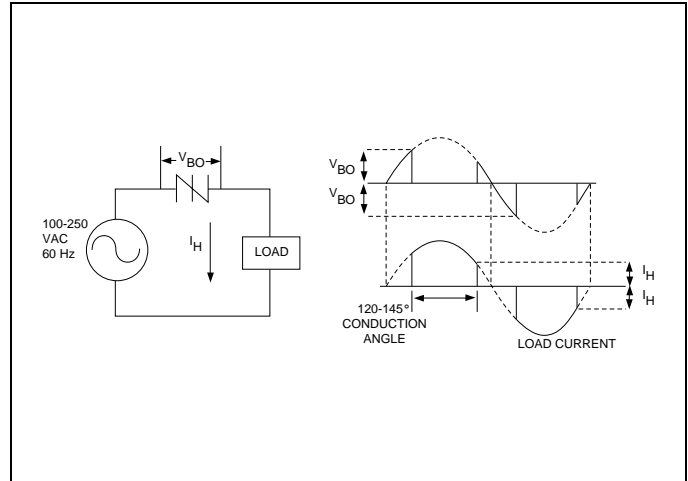


Figure 9.15 Basic Sidac Circuit

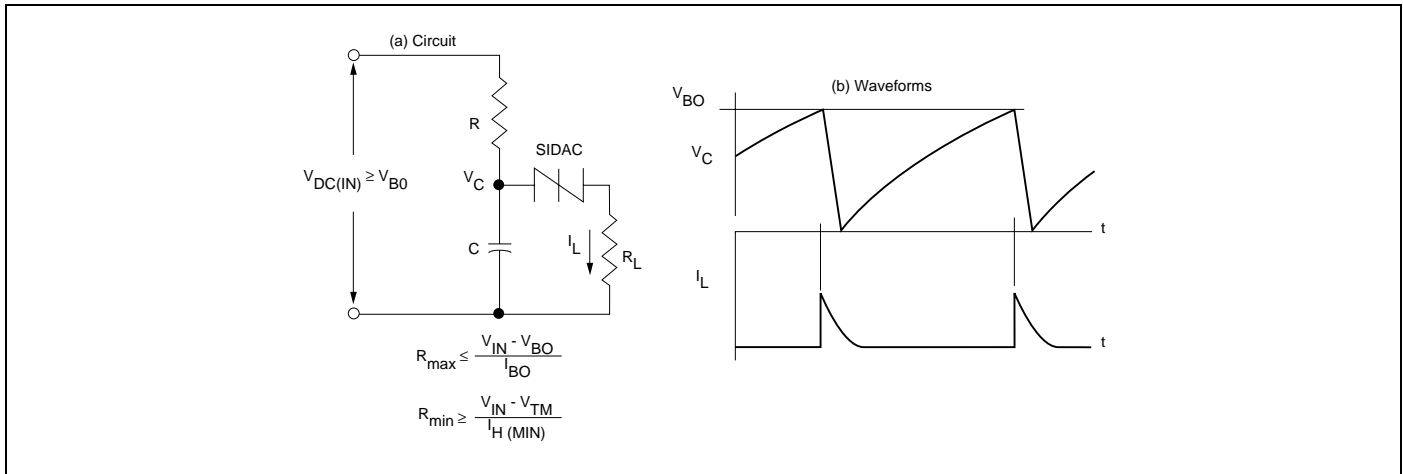


Figure 9.16 Relaxation oscillator Using a Sidac

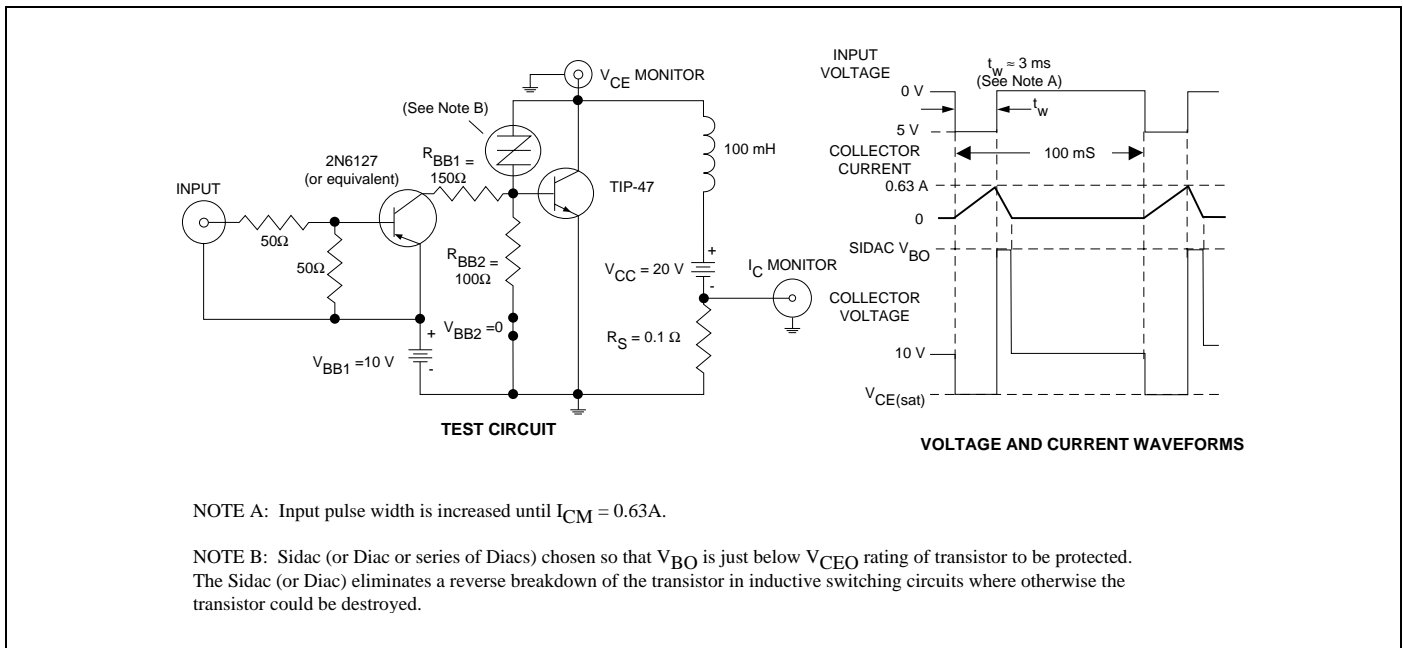


Figure 9.17 Sidac Added to Protect Transistor for Typical Transistor Inductive Load Switching Requirements

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.