

International **IR** Rectifier

Ultrafast Rectifier

MURD620CT

Features

- Ultrafast Recovery Time
- Low Forward Voltage Drop
- Low Leakage Current
- 175°C Operating Junction Temperature

$t_{rr} = 25\text{ns}$

$I_{F(AV)} = 6\text{Amp}$

$V_R = 200\text{V}$


Description/ Applications

International Rectifier's MUR.. series are the state of the art Ultra fast recovery rectifiers specifically designed with optimized performance of forward voltage drop and ultra fast recovery time. The planar structure and the platinum doped life time control, guarantee the best overall performance, ruggedness and reliability characteristics.

These devices are intended for use in the output rectification stage of SMPS, UPS, DC-DC converters as well as free-wheeling diode in low voltage inverters and chopper motor drives.

Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

Package Outline

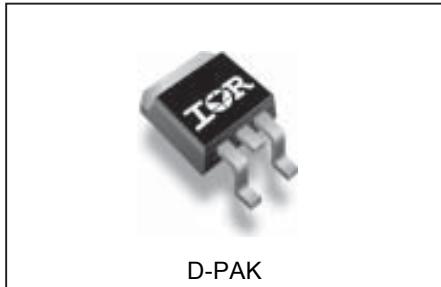

Absolute Maximum Ratings

Parameters		Max	Units
V_{RRM}	Peak Repetitive Peak Reverse Voltage	200	V
$I_{F(AV)}$	Average Rectified Forward Current Per Device	6	A
I_{FSM}	Total Device, (Rated V_R), $T_C = 146^\circ\text{C}$		
I_{FM}	Non Repetitive Peak Surge Current Per Diode	50	
$I_{J,T_{STG}}$	Peak Repetitive Forward Current (Rated V_R , Square wave, 20 KHz), $T_C = 146^\circ\text{C}$	6	
T_J, T_{STG}	Operating Junction and Storage Temperatures	- 65 to 175	$^\circ\text{C}$

MURD620CT

Bulletin PD-20737 rev. C 12/03

International
 Rectifier

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameters		Min	Typ	Max	Units	Test Conditions
V_{BR} , V_r	Breakdown Voltage, Blocking Voltage	200	-	-	V	$I_R = 100\mu\text{A}$
V_F	Forward Voltage	-	-	1.0	V	$I_F = 3\text{A}$
		-	-	0.96	V	$I_F = 3\text{A}, T_J = 125^\circ\text{C}$
		-	-	1.2	V	$I_F = 6\text{A}$
		-	-	1.13	V	$I_F = 6\text{A}, T_J = 125^\circ\text{C}$
I_R	Reverse Leakage Current	-	-	5	μA	$V_R = V_R$ Rated
		-	-	250	μA	$T_J = 125^\circ\text{C}, V_R = V_R$ Rated
C_T	Junction Capacitance	-	12	-	pF	$V_R = 200\text{V}$
L_S	Series Inductance	-	8.0	-	nH	Measured lead to lead 5mm from package body

Dynamic Recovery Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameters		Min	Typ	Max	Units	Test Conditions
t_{rr}	Reverse Recovery Time	-	-	35	ns	$I_F = 1.0\text{A}, dI_F/dt = 50\text{A}/\mu\text{s}, V_R = 30\text{V}$
		-	-	25		$I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{REC} = 0.25\text{A}$
		-	19	-		$T_J = 25^\circ\text{C}$
		-	26	-		$T_J = 125^\circ\text{C}$
I_{RRM}	Peak Recovery Current	-	3.1	-	A	$T_J = 25^\circ\text{C}$
		-	4.6	-		$T_J = 125^\circ\text{C}$
Q_{rr}	Reverse Recovery Charge	-	30	-	nC	$T_J = 25^\circ\text{C}$
		-	60	-		$T_J = 125^\circ\text{C}$

Thermal - Mechanical Characteristics

Parameters			Min	Typ	Max	Units		
T_J	Max. Junction Temperature Range		-	-	- 65 to 175	°C		
T_{Stg}	Max. Storage Temperature Range		-	-	- 65 to 175			
R_{thJC}	Thermal Resistance, Junction to Case	Per Leg	-	-	9.0	°C / W		
R_{thJA}	Thermal Resistance, Junction to Ambient	Per Leg	-	-	80			
R_{thCS}^{\circledcirc}	Thermal Resistance, Case to Heatsink		-	-	-			
Wt	Weight		-	0.3	-	g		
			-	0.01	-	(oz)		
Mounting Torque			6.0	-	12	Kg-cm		
			5.0	-	10	lbf.in		

^① Mounting Surface, Flat, Smooth and Greased

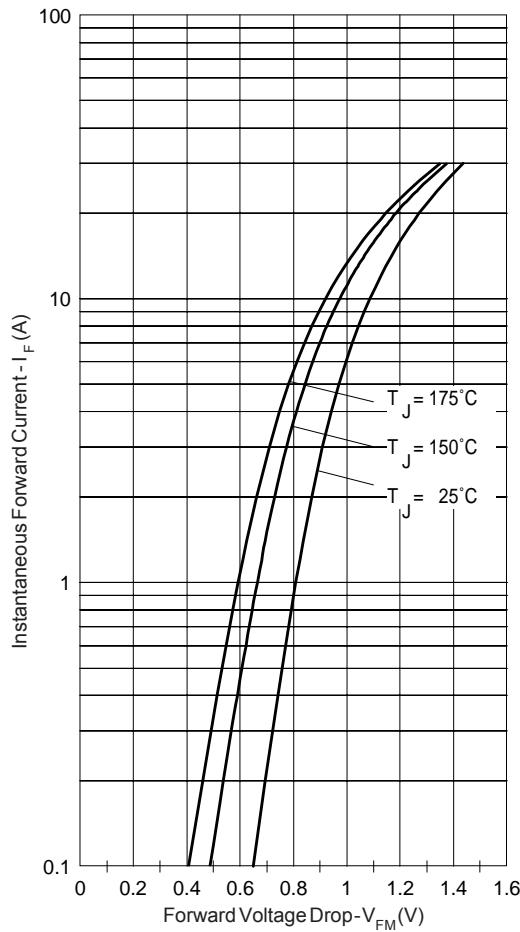


Fig.1-Typical Forward Voltage Drop Characteristics

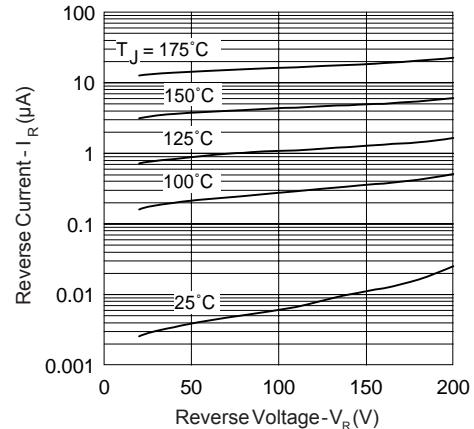


Fig.2-Typical Values Of Reverse Current Vs. Reverse Voltage

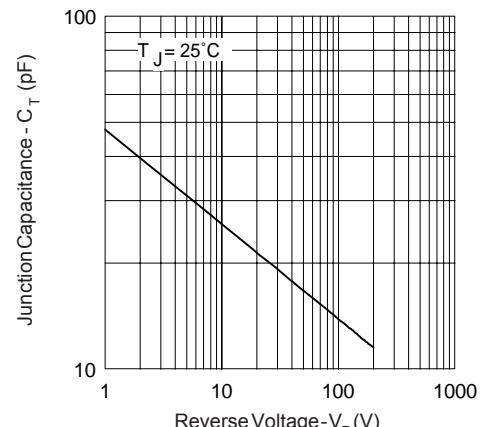


Fig.3-Typical Junction Capacitance Vs. Reverse Voltage

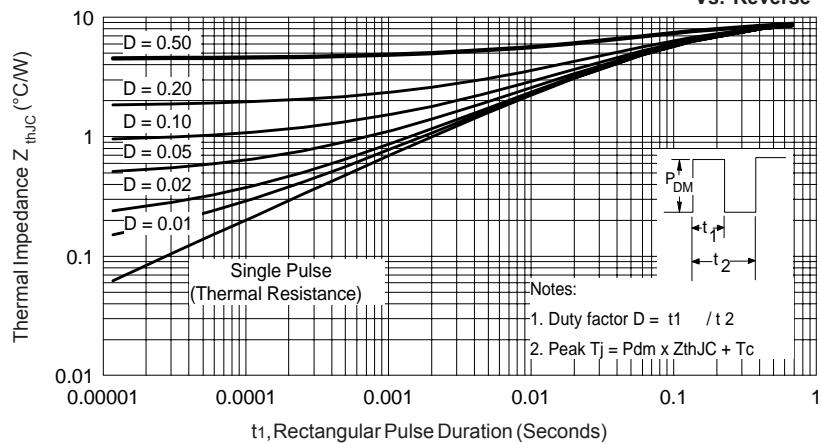


Fig.4 - Max. Thermal Impedance Z_{thJC} Characteristics

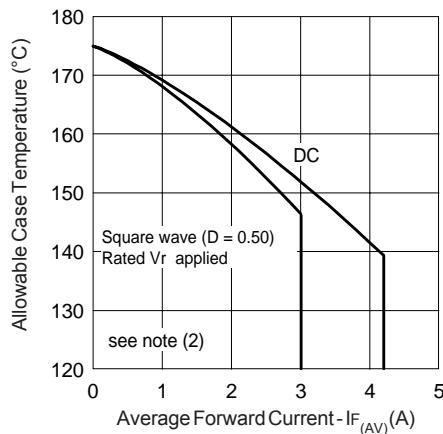


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

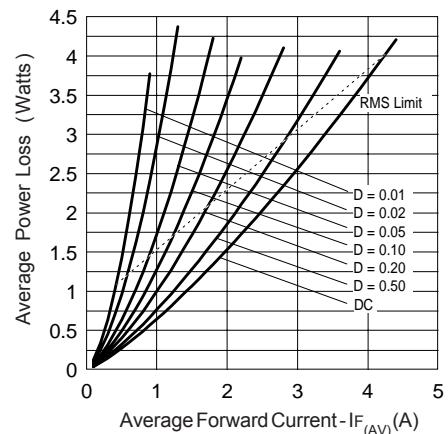


Fig. 6 - Forward Power Loss Characteristics

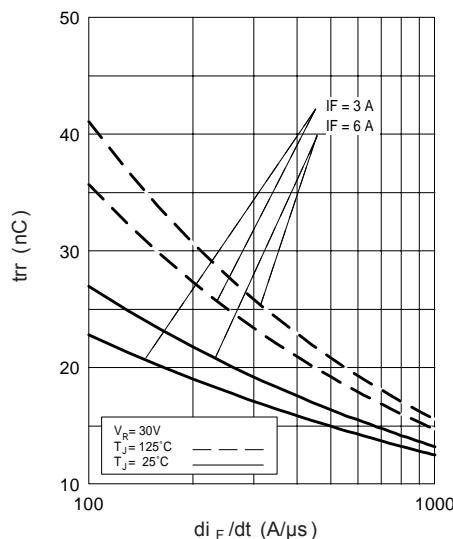


Fig. 7 - Typical Reverse Recovery vs. di_F/dt

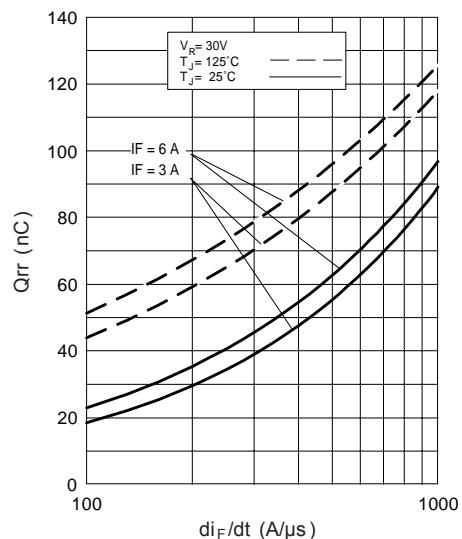


Fig. 8 - Typical Stored Charge vs. di_F/dt

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;
 $P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = \text{rated } V_R$

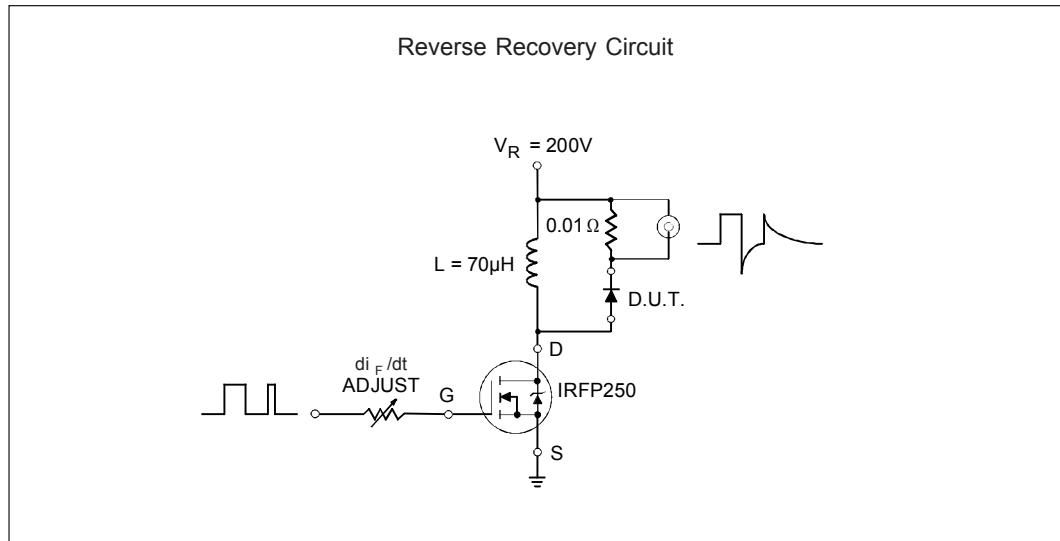


Fig. 9- Reverse Recovery Parameter Test Circuit



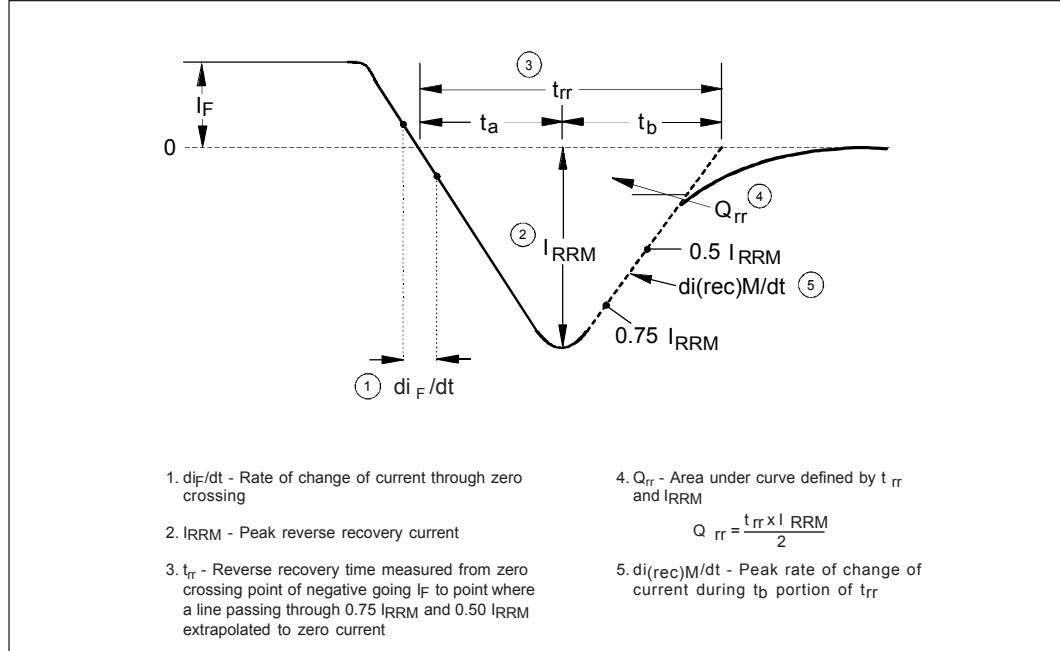


Fig. 10 - Reverse Recovery Waveform and Definitions

Outline Table

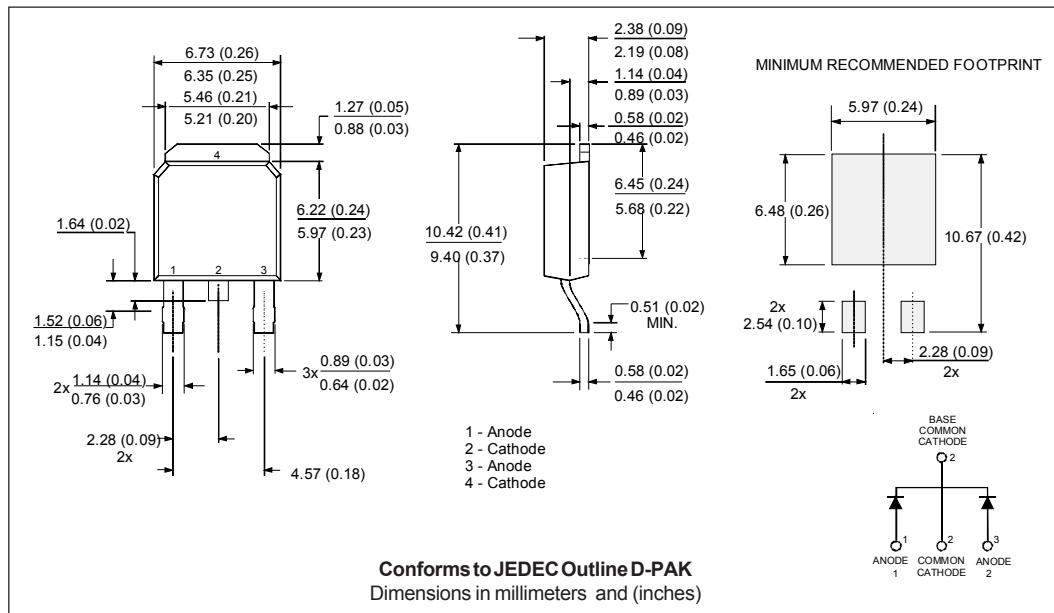

Tape & Reel Information

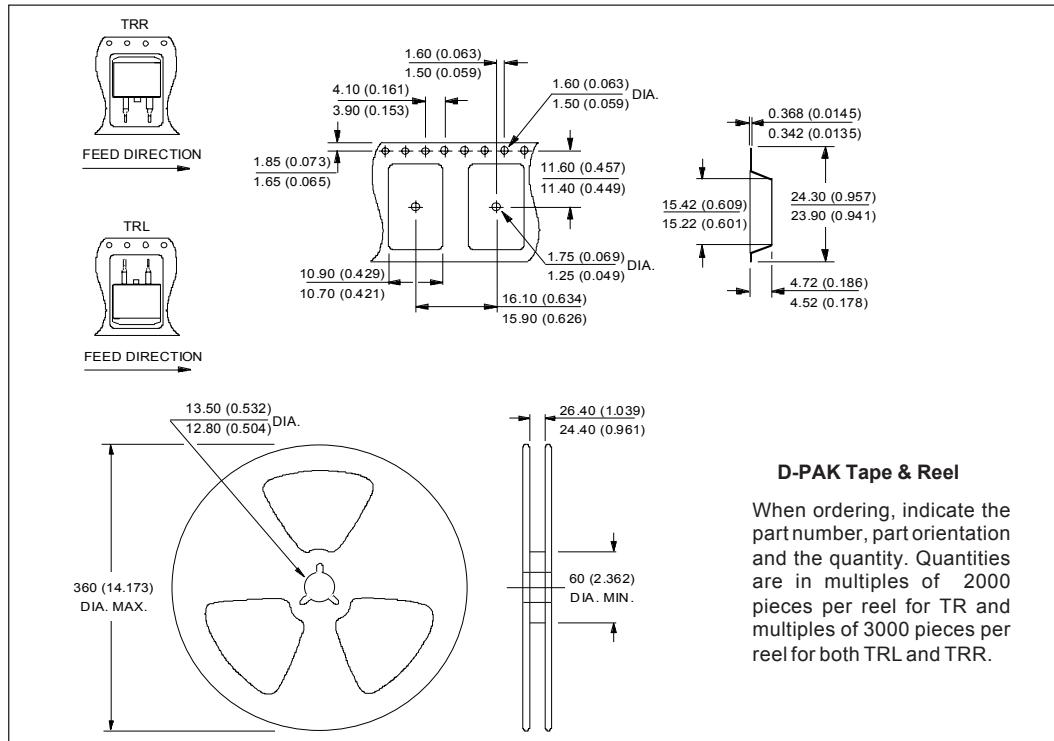

Ordering Information Table

Device Code	MUR	D	6	20	CT	TRL
1	(1)					
2		(2)				
3			(3)			
4				(4)		
5					(5)	
6						(6)

1 - Ultrafast MUR Series
2 - D = D-Pak
3 - Current Rating (6 = 6A)
4 - Voltage Rating (20 = 200V)
5 - CT = Center Tap (Dual)
6 - Tape & Reel Suffix

TR = Tape & Reel
TRL = Tape & Reel (Left Oriented)
TRR = Tape & Reel (Right Oriented)

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 12/03

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.