

## Positive LDO regulator IC 正出力低飽和レギュレータIC

# TK111xxCS-G, TK11100CS-G, TK121xxCS-G

### DESCRIPTION

The TK111xxCS-G, TK11100CS-G and TK121xxCS-G are low dropout linear regulators with on/off control, which can supply 200mA load current.

The output voltage, trimmed with high accuracy, is available from 1.5 to 10.0V in 0.1V steps.

The on/off control of the TK121xxCS-G is low threshold type of the TK111xxCS-G. And the TK11100CS-G output voltage, adjustable by external resistors, is available from 1.3 to 13.0V.

TK111xxCS-G, TK11100CS-G, TK121xxCS-Gは、出力電流200mAを安定に供給できるon/offコントロール付低飽和レギュレータICです。

出力電圧は内部固定で高精度にトリミングされ、1.5V~10.0Vの間で0.1Vステップで設定できます。

TK121xxCS-GはTK111xxCS-Gのon/offコントロール低閾値タイプです。またTK11100CS-Gは外部抵抗により出力電圧を1.3V~13.0V間で自由に設定できます。

### FEATURES

- High Precision Output Voltage of  $\pm 1.5\%$  or  $\pm 50mV$
- Adjustable Output Voltage by External Resistors (TK11100CS)
- Superior Phase Compensation to Previous Model
- Very Good Stability: Ceramic capacitor can be used.
- Very Low Dropout Voltage:  $V_{DROP}=80mV$  at  $I_{OUT}=50mA$
- Active High On/off Control
- Excellent Ripple Rejection Ratio: -80dB at 1kHz
- Very Low Noise with Noise Pass Pin
- Short Circuit Protection (Over Current Protection)
- Thermal Shutdown (Over Heat Protection)
- Reverse Bias Protection
- 高精度出力電圧:  $\pm 1.5\%$  or  $\pm 50mV$
- 外部抵抗により設定可能な出力電圧(TK11100CS)
- 位相補正をより高度化
- 高い安定性: セラミックコンデンサ使用可能
- 少ない入出力間電圧降下:  $V_{DROP}=80mV$  at  $I_{OUT}=50mA$
- 出力on/offコントロール: High-On
- 優れたリップルリジェクション: -80dB at 1kHz
- ノイズパス端子で低ノイズアプリケーション可
- 短絡保護機能(過電流保護)
- サーマルシャットダウン機能(過熱保護)
- 逆バイアス過電流阻止機能

### APPLICATIONS

- Battery Powered Systems
- Mobile Communication Systems:  
Cordless Phone, GSM, PHS, PDC, CDMA,  
Base Station of Mobile Phones etc.
- Industrial Equipment:  
Personal Computer, Barcode Reader etc.
- Measurement System etc.
- バッテリー駆動機器
- 移動体通信機器用:  
コードレスホン、GSM、PHS、PDC、CDMA、  
携帯電話基地局 etc.
- 産業機器用:  
パソコン、バーコードリーダ etc.
- 計測器 etc

### PACKAGE OUTLINE

### ORDERING INFORMATION

Part name	Package	Marking	Pin configuration	Ordering information																																																																																				
TK111xxCS		Rxx	See next page	<table border="1"> <tr><td>T</td><td>K</td><td>1</td><td>1</td><td>x</td><td>x</td><td>C</td><td>S</td><td>C</td><td>L</td><td>-</td><td>G</td></tr> <tr><td colspan="11">Number _____</td><td>Environment code</td></tr> <tr><td colspan="11">1, 2</td><td>G: Lead free</td></tr> <tr><td colspan="11">Voltage code _____</td><td>Storage direction</td></tr> <tr><td colspan="11">Ex. 2.5V:25, 5.0V:50</td><td>L: Left type</td></tr> <tr><td colspan="11">Package code _____</td><td>Temperature range</td></tr> <tr><td colspan="11">S: SOT23-5</td><td>C: <math>T_A=25^\circ C</math>, I: Full</td></tr> </table>	T	K	1	1	x	x	C	S	C	L	-	G	Number _____											Environment code	1, 2											G: Lead free	Voltage code _____											Storage direction	Ex. 2.5V:25, 5.0V:50											L: Left type	Package code _____											Temperature range	S: SOT23-5											C: $T_A=25^\circ C$ , I: Full
T	K	1	1	x	x	C	S	C	L	-	G																																																																													
Number _____											Environment code																																																																													
1, 2											G: Lead free																																																																													
Voltage code _____											Storage direction																																																																													
Ex. 2.5V:25, 5.0V:50											L: Left type																																																																													
Package code _____											Temperature range																																																																													
S: SOT23-5											C: $T_A=25^\circ C$ , I: Full																																																																													
TK121xxCS	xxR																																																																																							
TK11100CS		R00	See next page	<table border="1"> <tr><td>T</td><td>K</td><td>1</td><td>1</td><td>0</td><td>0</td><td>C</td><td>S</td><td>C</td><td>B</td><td>-</td><td>G</td></tr> <tr><td colspan="11">Package code _____</td><td>Environment code</td></tr> <tr><td colspan="11">S: SOT23-5</td><td>G: Lead free</td></tr> <tr><td colspan="11">Temperature range _____</td><td>Storage direction</td></tr> <tr><td colspan="11">C: <math>T_A=25^\circ C</math></td><td>B: Back type</td></tr> </table>	T	K	1	1	0	0	C	S	C	B	-	G	Package code _____											Environment code	S: SOT23-5											G: Lead free	Temperature range _____											Storage direction	C: $T_A=25^\circ C$											B: Back type																								
T	K	1	1	0	0	C	S	C	B	-	G																																																																													
Package code _____											Environment code																																																																													
S: SOT23-5											G: Lead free																																																																													
Temperature range _____											Storage direction																																																																													
C: $T_A=25^\circ C$											B: Back type																																																																													

\* "xx" means voltage code. "xx"は電圧コードを示しています。

## ABSOLUTE MAXIMUM RATINGS

Parameter	項目	Symbol 記号	Rating 定格	Unit 単位	Remarks 備考
Operating Voltage Range	動作電圧範囲	$V_{OP}$	2.1 to 14.0	V	TK111xxCS/11100CS
			2.1 to 12.0		TK121xxCS
Operating Temperature Range	動作温度範囲	$T_{OP}$	-40 to +85	°C	
Power Dissipation	許容消費電力	$P_D$	600	mW	Board mount 基板実装時

## ELECTRICAL CHARACTERISTICS

TK11100CS:  $V_{IN}=4.0V$ ,  $V_{OUT}=3.0V$  TK111xxCS, TK121xxCS:  $V_{IN}=V_{OUT,TYP}+1.0V$ ,  $V_{CONT}=1.8V$ ,  $T_A=T_J=25^\circ C$ 


Parameter 項目	Symbol 記号	Value			Units 単位	Conditions 条件
		MIN	TYP	MAX		
Dropout Voltage 入出力間電圧降下 *1	$V_{DROP}$	80	140	mV	$I_{OUT}=50mA$	
Maximum Output Current 最大出力電流 *2	$I_{OUT,MAX}$	240	320	mA	$V_{OUT}=V_{OUT,TYP}\times 0.9$	
Quiescent Current 電源電流	$I_Q$	63	100		TK111xxCS	
		78	125	$\mu A$	TK11100CS( $R_1=51k\Omega$ )	$I_{OUT}=0mA$
		92	146		TK121xxCS	
Standby Current スタンバイ電流	$I_{STB}$	0.0	0.1	$\mu A$	$V_{CONT}=0V$	
Ground Pin Current 無効電流	$I_{GND}$	1.0	1.8	mA	$I_{OUT}=50mA$	
Control Voltage コントロール電圧	$V_{CONT}$	1.8			TK111xxCS	$V_{OUT}$ ON state
			0.35		TK11100CS	$V_{OUT}$ OFF state
		0.9			TK121xxCS	$V_{OUT}$ ON state
			0.2		TK121xxCS	$V_{OUT}$ OFF state

\*1 For  $V_{OUT} \leq 2.0V$ , no regulations 出力電圧2.0V以下の製品は入出力電圧降下項目の規格はありません。


\*2 The maximum output current is limited by power dissipation. 最大電流値は許容消費電力に制限されます。

## BLOCK DIAGRAM


## ■ TK111xxCS

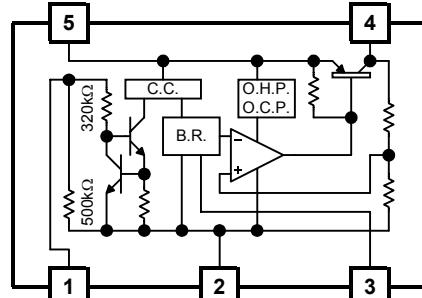


TK111xxCS/TK121xxCS

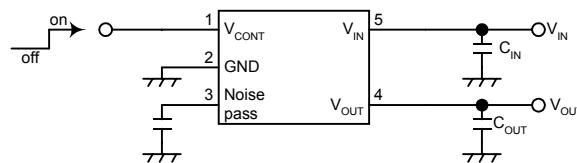


## ■ TK11100CS

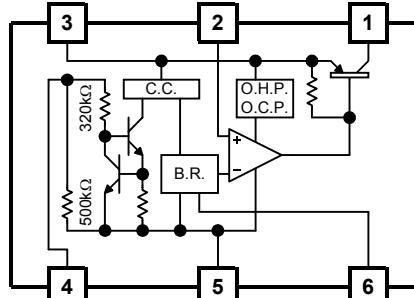

TK11100CS

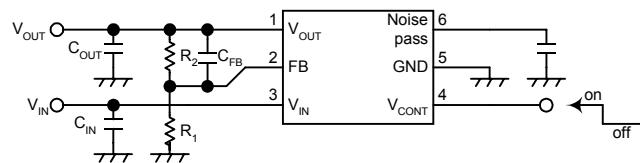

## ■ TK121xxCS

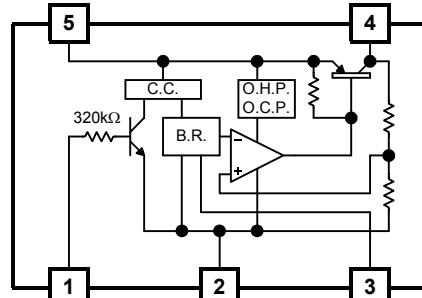

$$V_{OUT}=V_{FB}\times\{(R_1+R_2)/R_1\}$$

$$V_{FB,TYP}=1.27V$$

\* C.C....Control Circuit, O.H.P...Over Heat Protection, O.C.P...Over Current Protection, B.G...Band gap Reference