


6W isolated DC-DC converter in DIP package
Ultra-wide input voltage and regulated dual/single output

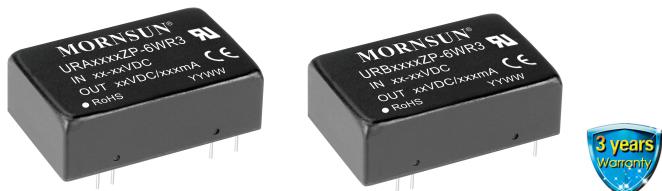

Patent Protection

URA_ZP-6WR3 & URB_ZP-6WR3 series of isolated 6W DC-DC converter products with an ultra-wide range of voltage input of 9-36VDC, 18-75VDC, Input to output isolation is tested with 1500VDC, output over-voltage protection and output short circuit protection. They meet CLASS A of CISPR32/EN55032 EMI standards without external components and they are widely used in fields such as industrial control, electric power, instruments and communication.

FEATURES

- Ultra-wide 4:1 range input voltage
- High efficiency up to 88%
- No-load power consumption as low as 0.12W
- I/O test isolation voltage :1.5k VDC
- Operating ambient temperature range: -40°C ~ +85°C
- Input under-voltage protection, output over-voltage, short circuit, over-current protection
- Meet CISPR32/EN55032 CLASS A, without extra components
- Industry standard pin-out
- UL60950, EN60950, IEC60950 approved

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency ⁽²⁾ (%) Min./Typ.	Max. Capacitive Load ⁽³⁾ (μF)
		Nominal (Range)	Max. ⁽¹⁾	Voltage VDC	Current (mA) Max./Min.		
UL/CE/CB	URA2405ZP-6WR3	24 (9-36)	40	±5	±600/0	81/83	680
	URA2409ZP-6WR3			±9	±333/0	84/86	220
	URA2412ZP-6WR3			±12	±250/0	85/87	330
	URA2415ZP-6WR3			±15	±200/0	86/88	220
	URA2424ZP-6WR3			±24	±125/0	85/87	100
	URB2403ZP-6WR3			3.3	1500/0	77/79	1800
	URB2405ZP-6WR3			5	1200/0	81/83	1000
	URB2409ZP-6WR3			9	667/0	82/84	1000
	URB2412ZP-6WR3			12	500/0	85/87	470
	URB2415ZP-6WR3			15	400/0	86/88	220
	URB2424ZP-6WR3			24	250/0	85/87	100
	URA4805ZP-6WR3	48 (18-75)	80	±5	±600/0	81/83	680
	URA4812ZP-6WR3			±12	±250/0	85/87	330
	URA4815ZP-6WR3			±15	±200/0	86/88	220
	URB4803ZP-6WR3			3.3	1500/0	78/80	1800
	URB4805ZP-6WR3			5	1200/0	82/84	1000
--	URB4809ZP-6WR3			9	667/0	83/85	680
UL/CE/CB	URB4812ZP-6WR3			12	500/0	85/87	470
	URB4815ZP-6WR3			15	400/0	86/88	220
	URB4824ZP-6WR3			24	250/0	85/87	100

Notes:

- ① Exceeding the maximum input voltage may cause permanent damage;
- ② Efficiency is measured at nominal input voltage and rated output load;
- ③ The specified maximum capacitive load value for Vo1 and Vo2 output is identical.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	24VDC input	--	301/5	309/12	mA
	48VDC input	--	148/4	154/8	
Reflected Ripple Current		--	20	--	

Surge Voltage (1sec. max.)	24VDC input 48VDC input	-0.7 -0.7	-- --	50 100	VDC
Start-up Voltage	24VDC input 48VDC input	-- --	-- --	9 18	
Under-voltage turn-off	24VDC input	5.5	6.5	--	VDC
	48VDC input	12	15.5	--	
Input Filter			Pi filter		
Hot Plug			Unavailable		

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy ^①	Vo1		--	± 1	± 3	
	Vo2					
Balance of Output Voltage	Dual output, balanced load		--	± 0.5	± 1.5	
Linear Regulation	Input voltage variation from low to high at full load	Vo1	--	± 0.2	± 0.5	%
		Vo2	--	± 0.5	± 1	
Load Regulation ^②	5%-100% load	Vo1	--	± 0.5	± 1	
		Vo2	--	± 0.5	± 1.5	
Cross Regulation	Dual outputs, Vo1 load at 50%, Vo2 load at range of 10%-100%		--	--	± 5	
Transient Recovery Time	25% load step change		--	300	500	μs
Transient Response Deviation		3.3V, 5V, $\pm 5V$ output	--	± 5	± 8	%
		Others	--	± 3	± 5	
Temperature Coefficient	Full load		--	--	± 0.03	$^{\circ}C$
Ripple&Noise ^③	20MHz bandwidth		--	--	85	mV_{p-p}
Over-voltage Protection	Input voltage range		110	--	160	$\%_{Vo}$
Over-current Protection			110	140	190	$\%_{Io}$
Short-circuit Protection			Continuous, self-recovery			

Note: ①Output voltage accuracy of $\pm 5VDC/\pm 9VDC$ output converter for 0%-5% load is $\pm 5\%$ max;

②Load regulation for 0%-100% load is $\pm 5\%$;

③The "parallel cable" method is used for ripple and noise test, please refer to *DC-DC Converter Application Notes* for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	$M\Omega$
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V	--	1000	--	pF
Operating Temperature	Derating if the temperature is $\geq 71^{\circ}C$ (see Fig. 1)	-40	--	85	$^{\circ}C$
Storage Temperature		-55	--	125	
Storage Humidity	Non-condensing	5	--	95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	300	
Vibration		10-55Hz, 2G, 30 Min. along X, Y and Z			
Switching Frequency *	PWM mode	--	300	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours

Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Mechanical Specifications

Case Material	Aluminum alloy
Dimensions	32.00 x 20.00 x 10.80mm
Weight	12g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS A (without extra components)/ CLASS B (see Fig.3-② for recommended circuit)		
	RE	CISPR32/EN55032 CLASS A (without extra components)/ CLASS B (see Fig.3-② for recommended circuit)		
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 4\text{KV}$	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	$\pm 2\text{KV}$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A
	Immunities of voltage dip, drop and short interruption	IEC/EN61000-4-29	0-70%	perf. Criteria B

Product Characteristic Curve





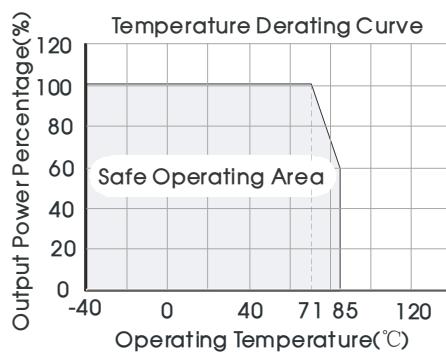


Fig. 1

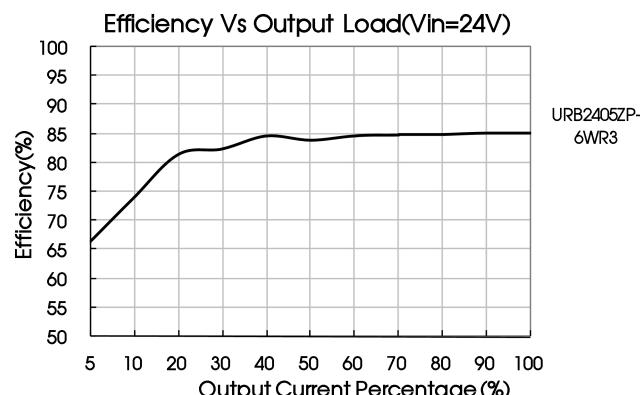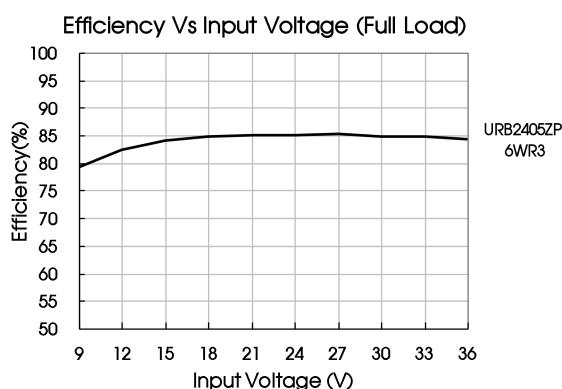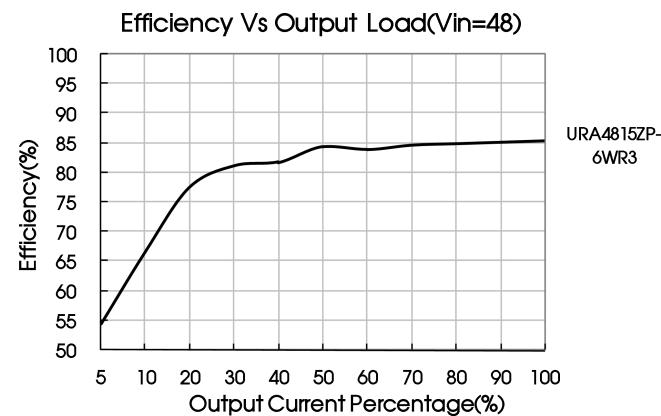

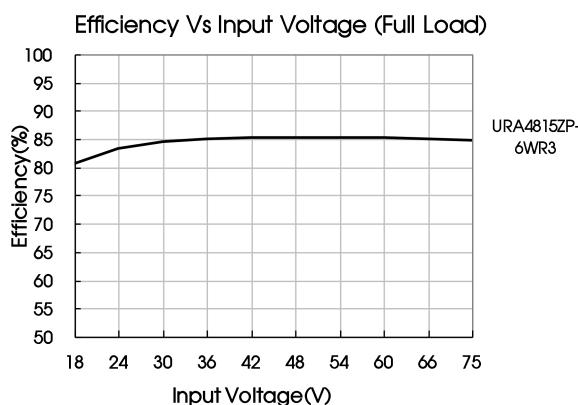


Design Reference

1. Typical application

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.


Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

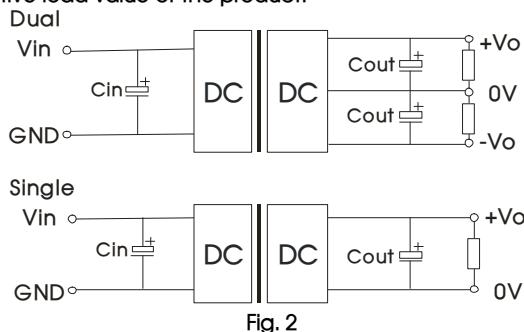

Vin(VDC)	Cin	Cout
24	100µF	10µF
48	10µF ~47µF	10µF

2. EMC compliance circuit

Dual output:

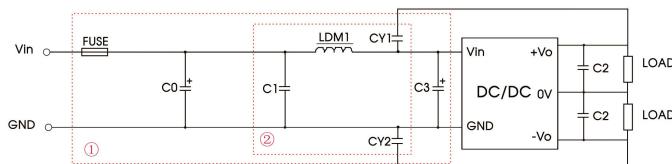

Parameter description:

Model	Vin:24V	Vin:48V
FUSE	Choose according to actual input current	
C0, C3	330µF/50V	330µF/100V
C1	1µF/50V	1µF/100V
C2	Refer to the Cout in Fig.2	
LDM1		4.7µH
CY1, CY2		1nF/2KV

Single output:



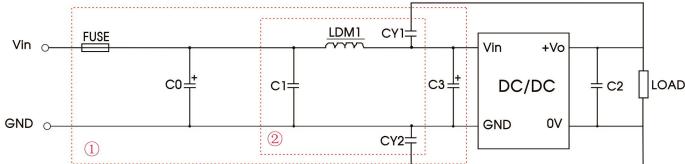


Fig. 3


Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test.

3. The products do not support parallel connection of their output
4. For additional information please refer to DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout

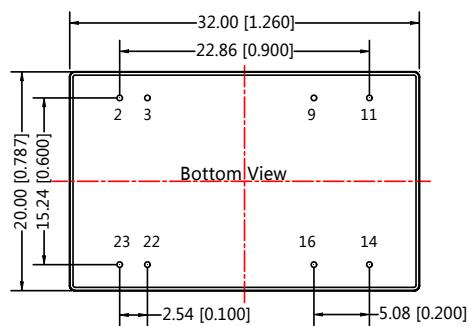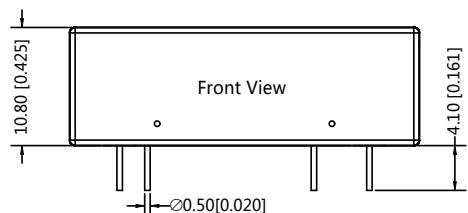

Note:
Unit :mm[inch]
Pin diameter tolerances : ± 0.10 [± 0.004]
General tolerances: ± 0.50 [± 0.020]

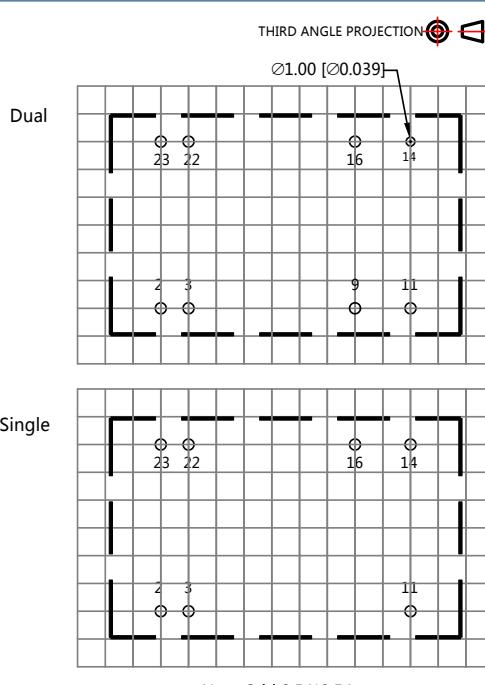

Note:Grid 2.54*2.54mm

Pin-Out		
Pin	Single	Dual
2,3	GND	GND
9	No Pin	0V
11	NC	-Vo
14	+Vo	+Vo
16	0V	0V
22,23	Vin	Vin

NC: No Connection

Notes:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58210008;
- It is recommended that the load imbalance of the dual output is $\leq \pm 5\%$. If it exceeds $\pm 5\%$, the performance of the product cannot be guaranteed to meet as datasheet marked. For details, please contact our technical staff;
- The max. capacitive load should be tested within the input voltage range and under full load conditions;
- Unless otherwise specified, data in this datasheet should be tested under the conditions of $T_a=25^\circ C$, humidity $< 75\%RH$ when inputting nominal voltage and outputting rated load;
- All index testing methods in this datasheet are based on our company corporate standards;
- The performance indexes of the product models listed in this datasheet are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technicians for specific information;
- We can provide product customization service;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail:info@mornsun.cn

www.mornsun-power.com