



Thermoelectric Cooler

TEC1-12708

Performance Specifications

Hot Side Temperature (° C)	25° C	50° C
Qmax (Watts)	71	79
Delta Tmax (° C)	66	75
I _{max} (Amps)	8.5	8.4
V _{max} (Volts)	15.4	17.5
Module Resistance (Ohms)	1.50	1.80




SKYTECH




Performance curves on page 2


تهیه و توزیع قطعات الکترونیک

$T_h = 25^\circ\text{C}$

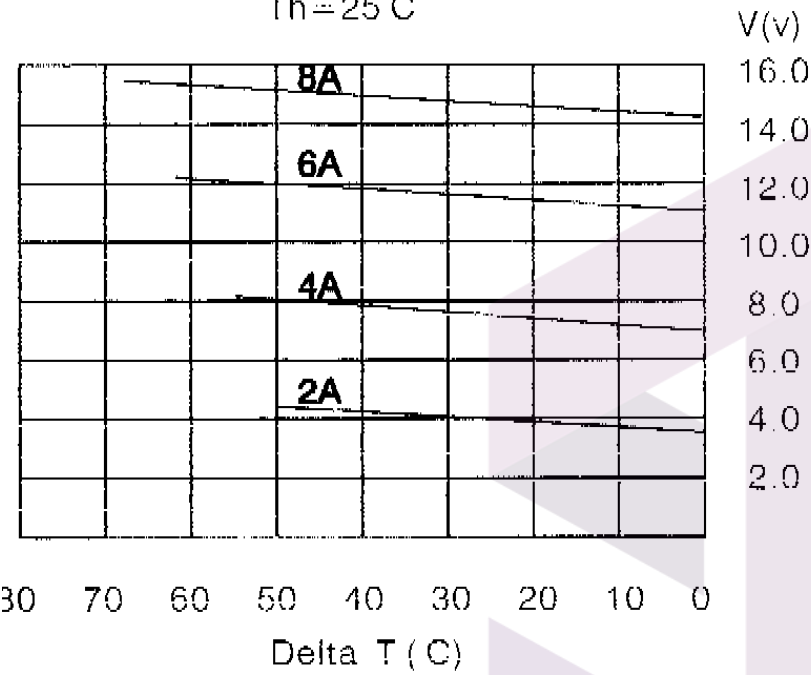

$T_h = 50^\circ\text{C}$

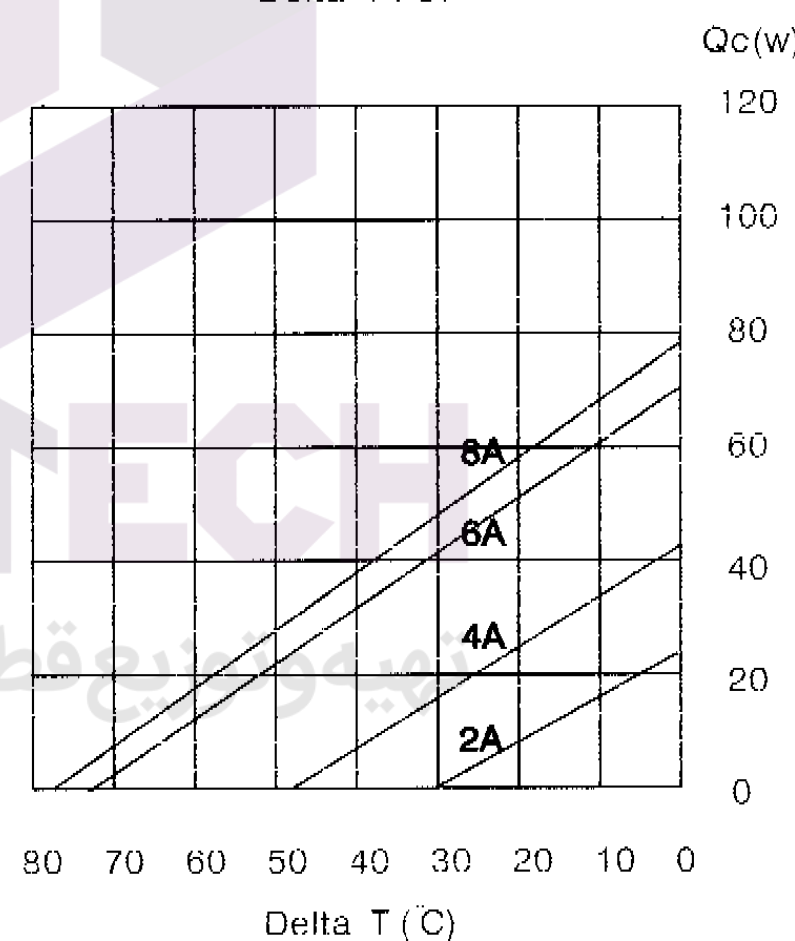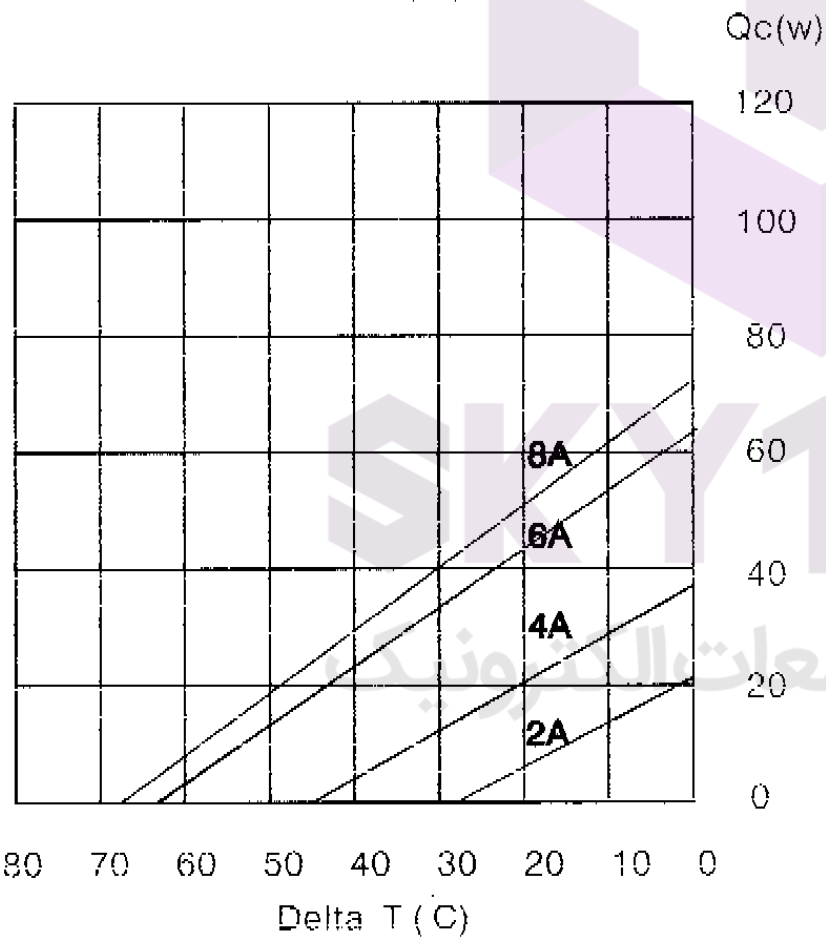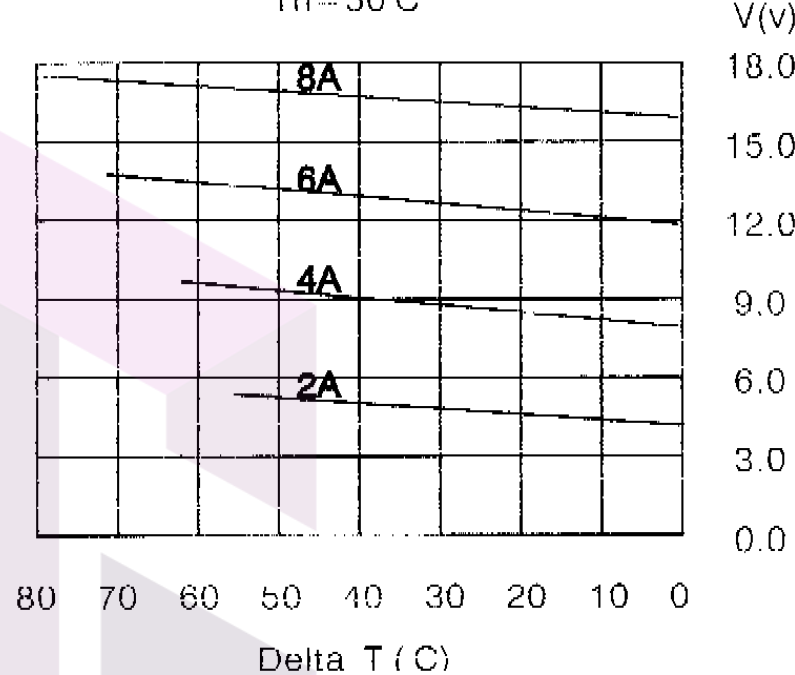

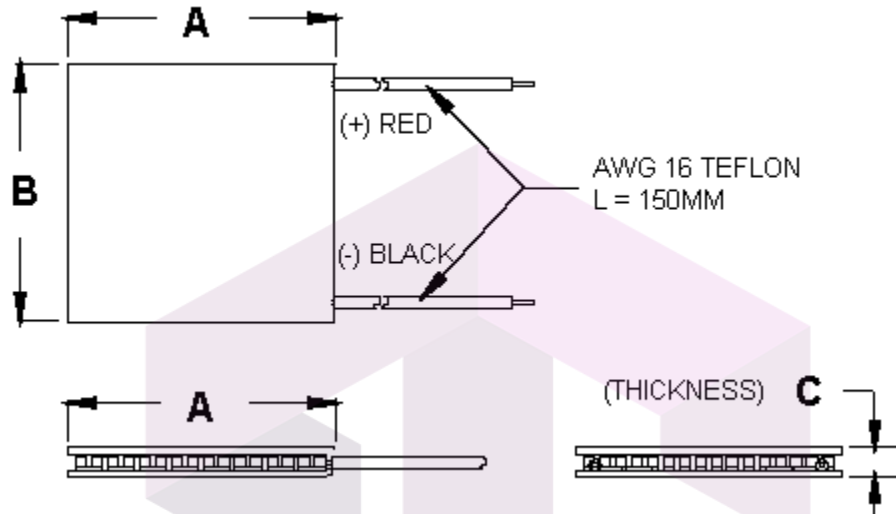

Ceramic Material: Alumina (Al_2O_3)
Solder Construction: 138°C, Bismuth Tin (BiSn)

Size table:

A	B	C			
40	40	3.5			

SKYTECH

Operating Tips

- Max. Operating Temperature: 138°C
- Do not exceed I_{max} or V_{max} when operating module.
- Life expectancy: 200,000 hours
- Please consult HB for moisture protection options (sealing).
- Failure rate based on long time testings: 0.2%.