


SF2242B

40 MHz

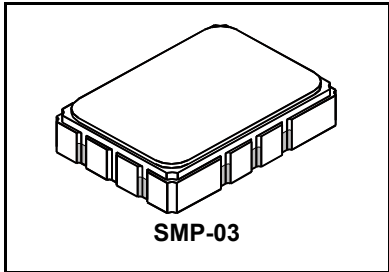

- **Compact 40 MHz SAW Filter Design**
- **Hermetic 5 x 7 mm Surface-mount Case**
- **Complies with Directive 2002/95/EC (RoHS)** 

Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
DC Voltage on any Non-ground Terminal	5	VDC
Storage Temperature Range in Tape and Reel	-40 to +85	°C
Suitable for Lead-free Soldering - Maximum Soldering Profile	260 °C for 30 s	

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	f_C	1		40		MHz
Minimum insertion Loss	IL_{MIN}	1, 2		9.5	12.0	dB
3 dB Bandwidth			3.5	5.0		MHz
Amplitude Ripple, ($f_C - 1.75$ MHz to $f_C + 1.75$ MHz)				1.4	2.0	dB _{P-P}
Group Delay Ripple, ($f_C - 1.75$ MHz to $f_C + 1.75$ MHz)				190	250	ns _{P-P}
Attenuation Relative to IL_{MIN} :						dB
$f_C - 5$ MHz, $f_C + 5$ MHz			20	26		
27.5 to 32.5 MHz			31	40		
47.5 to 52.5 MHz			31	46		
0 to 30.0 MHz			35	64		
50.0 to 70.0 MHz			35	40		
Operating Temperature Range	T_A	1	-40		+85	°C



Terminating Source Impedance (through matching network)		$Z_S = 50$ ohms
Terminating Load Impedance (through matching network)		$Z_L = 50$ ohms
Case Style	6	SMP-03 7 x 5 mm Nominal Footprint
Lid Symbolization (YY = year, WW = week)		RFM/SF2242B/YYWW

 **CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**



NOTES:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, f_C .
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Tape and Reel Standard ANSI / EIA 481.
7. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
8. US and international patents may apply.
9. Electrostatic Sensitive Device. Observe precautions for handling.
10. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.

Filter Response Plots

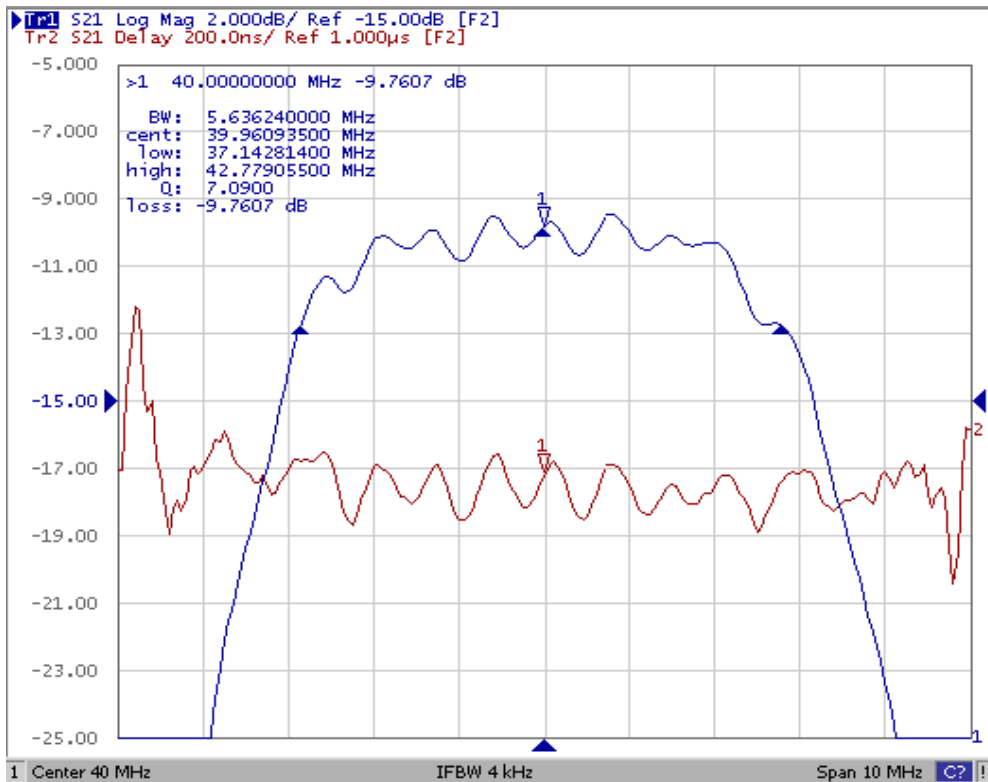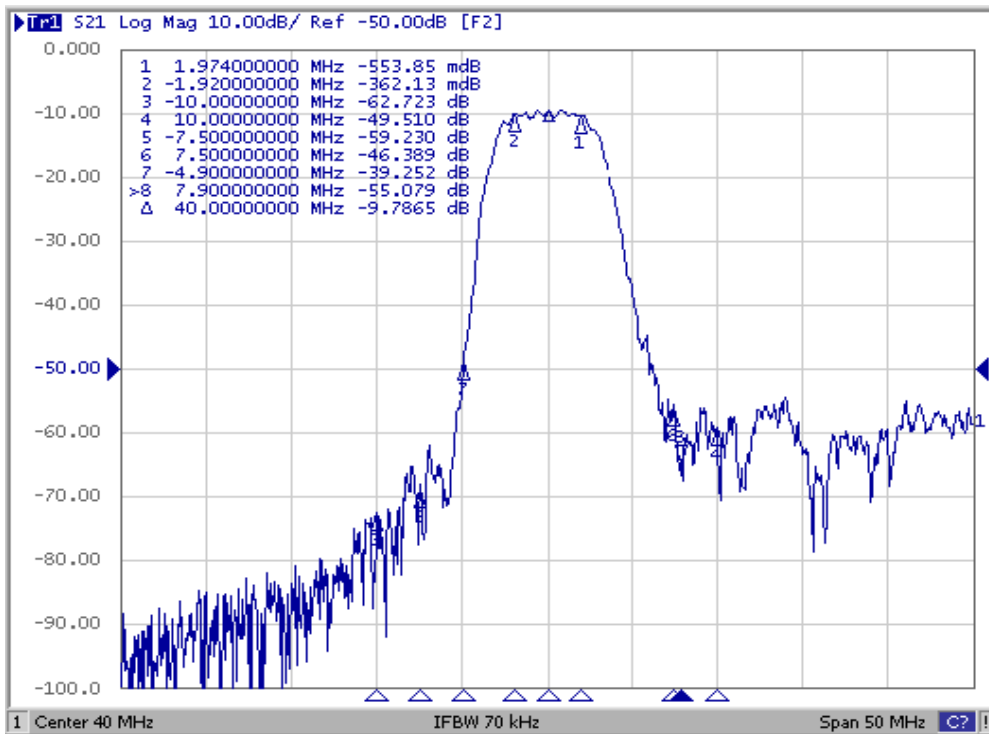


Filter Input/Output Impedance Plots

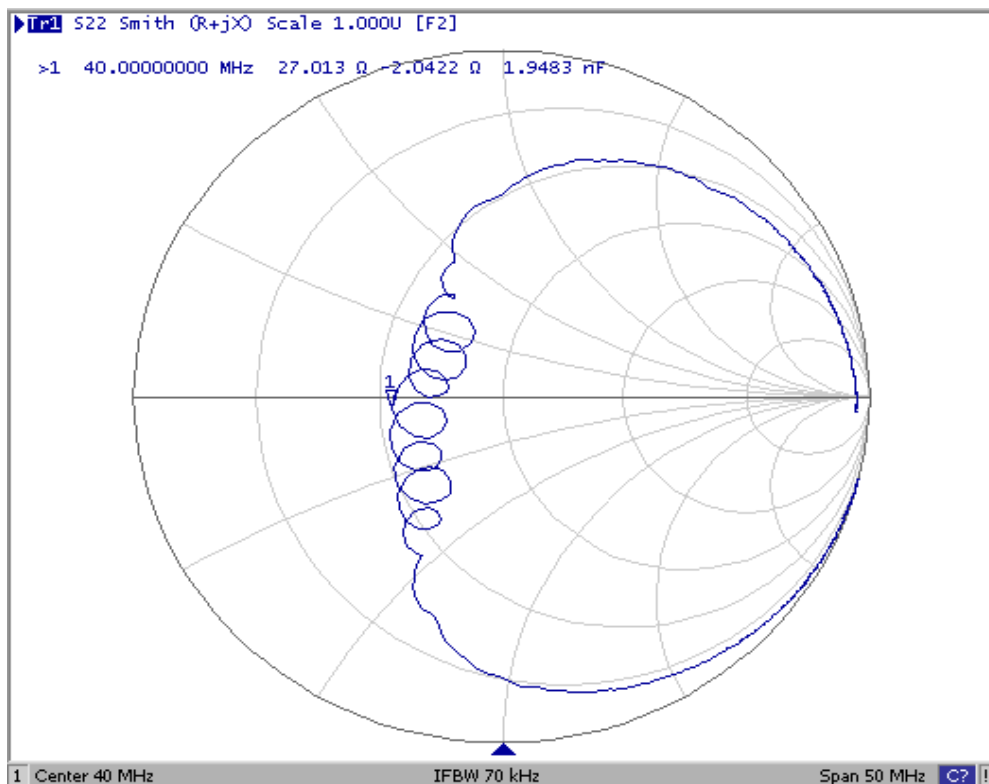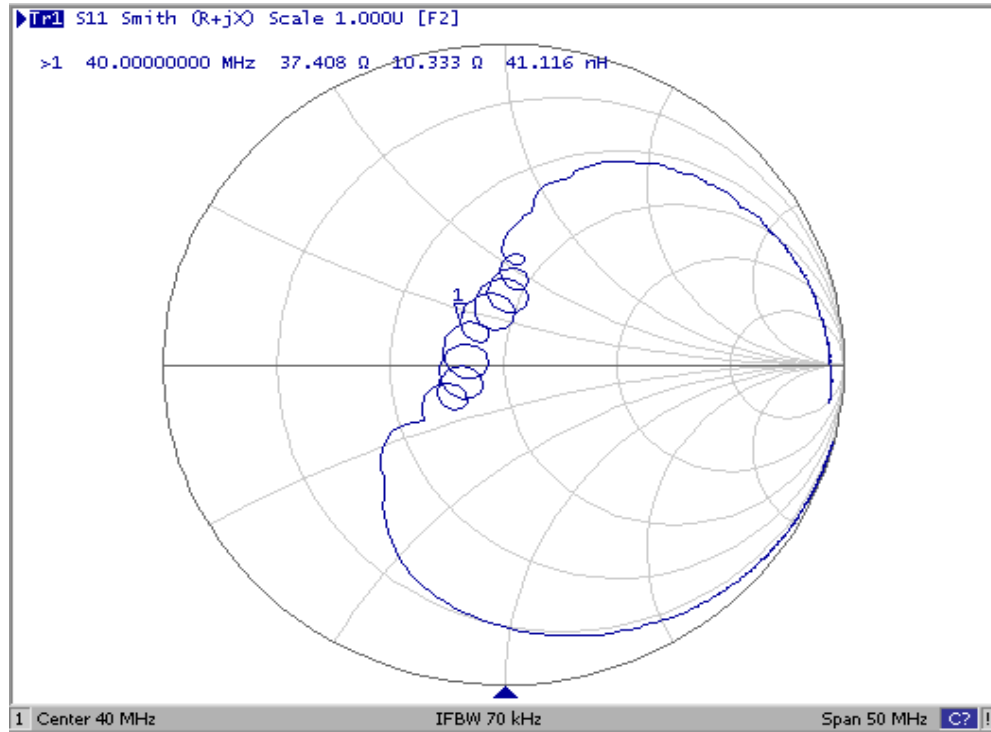


SMP-03 10-Terminal Ceramic Surface-mount Case


5 x 7 mm Nominal Footprint



Recommended PCB Footprint

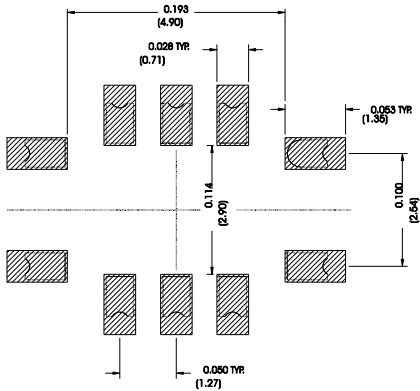


Matching Circuit

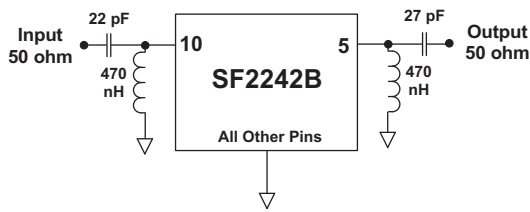


Case Dimensions						
Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	6.80	7.00	7.20	0.268	0.276	0.283
B	4.80	5.00	5.20	0.189	0.197	0.205
C	-	1.65	2.00	-	0.065	0.079
D	0.47	0.60	0.73	0.019	0.024	0.029
E	2.41	2.54	2.67	0.095	0.100	0.105
H	0.87	1.0	1.13	0.034	0.039	0.044
J	4.87	5.00	5.13	0.192	0.197	0.202
K	2.87	3.00	3.13	0.113	0.118	0.123
P	1.14	1.27	1.40	0.045	0.050	0.055

Electrical Connections	
Single-Ended Connection	Terminals
Input	10
Output	5
Ground	All others
Differential Connection	Terminals
Input	10, 1
Output	5, 6
Ground	All others


Case Materials	
Solder Pad Plating	0.3 to 1.0 μm Gold over 1.27 to 8.89 μm Nickel
Lid Plating	2.0 to 3.0 μm Nickel
Body	Al_2O_3 Ceramic
Pb Free	

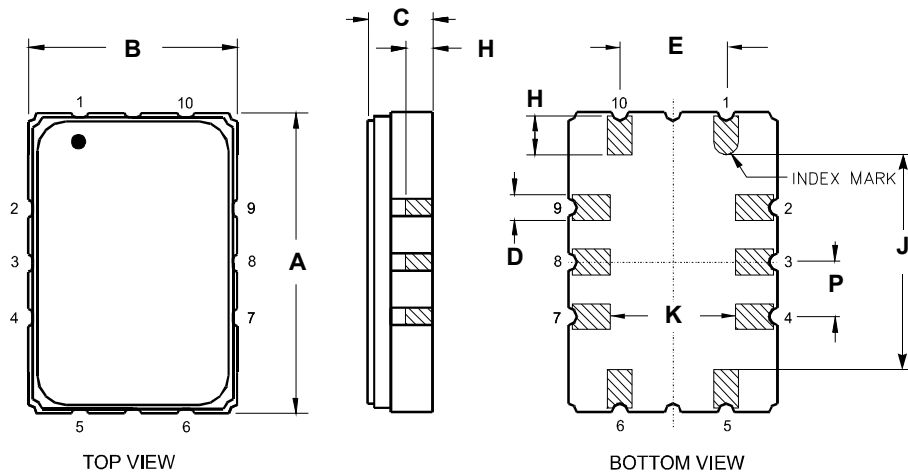

Tape and Reel Specifications

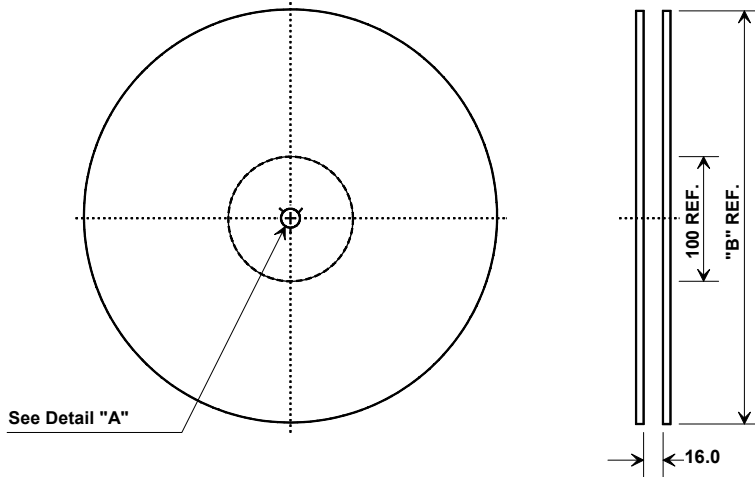


"B"		Quantity Per Reel
Nominal Size		
Inches	millimeters	
7	178	500
13	330	2000



COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions	
Ao	5.6 mm
Bo	7.6 mm
Ko	2.0 mm
Pitch	8.0 mm
W	16.0 mm

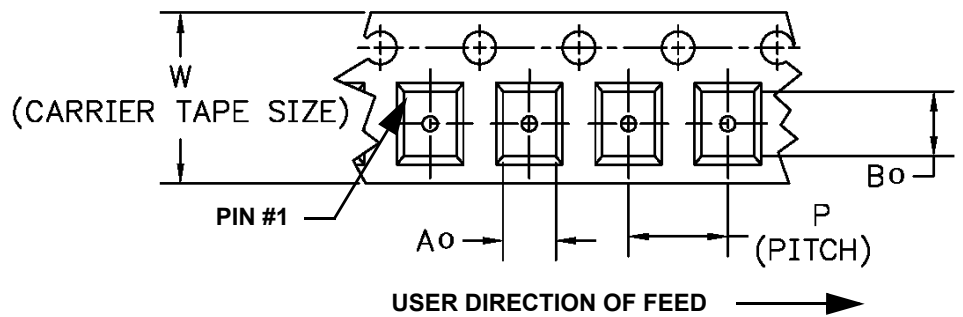

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Murata:](#)

[SF2242B](#)