

# PC123/PC123F

\* DIN-VDE0884 approved type (PC123Y/PC123FY) is also available as an option.

## ■ Features

1. Conform to European Safety Standard
2. Internal isolation distance: 0.4mm or more
3. High collector-emitter voltage ( $V_{CEO}$ : 70V)
4. Long creepage distance type
5. Recognized by UL (No. E64380)
  - Approved by VDE (DIN-VDE83601)
  - Approved by BSI (BS415 No. 7087, BS7002 No. 7409)
  - Approved by SEMCO (No. 9216212)
  - Approved by DEMCO (No. 108954)
  - Approved by EI (No. 155030)
  - Recognized by CSA (No. CA95323)

## ■ Model Line-up

Model No.	*Creepage distance	*Clearance distance
PC123	6.4mm or more	6.4mm or more
PC123F	8mm or more	8mm or more

\* Between input and output

## ■ Applications

1. Power supplies
2. OA equipment

## ■ Absolute Maximum Ratings

( $T_a=25^\circ\text{C}$ )

	Parameter	Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	*1 Peak forward current	$I_{FM}$	1	A
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P$	70	mW
Output	Collector-emitter voltage	$V_{CEO}$	70	V
	Emitter-collector voltage	$V_{ECO}$	6	V
	Collector current	$I_C$	50	mA
	Collector power dissipation	$P_C$	150	mW
	Total power dissipation	$P_{tot}$	200	mW
	*2 Isolation voltage	$V_{iso}$ (rms)	5	kV
	Operating temperature	$T_{opr}$	-30 to +100	$^\circ\text{C}$
	Storage temperature	$T_{stg}$	-55 to +125	$^\circ\text{C}$
	*3 Soldering temperature	$T_{sol}$	260	$^\circ\text{C}$

\*1 Pulse width  $\leq 100\mu\text{s}$ , Duty ratio: 0.001


\*2 40 to 60%RH, AC for 1 minute

\*3 For 10s

## European Safety Standard Approved Type Long Creepage Distance Photocoupler

### ■ Outline Dimensions

(Unit : mm)

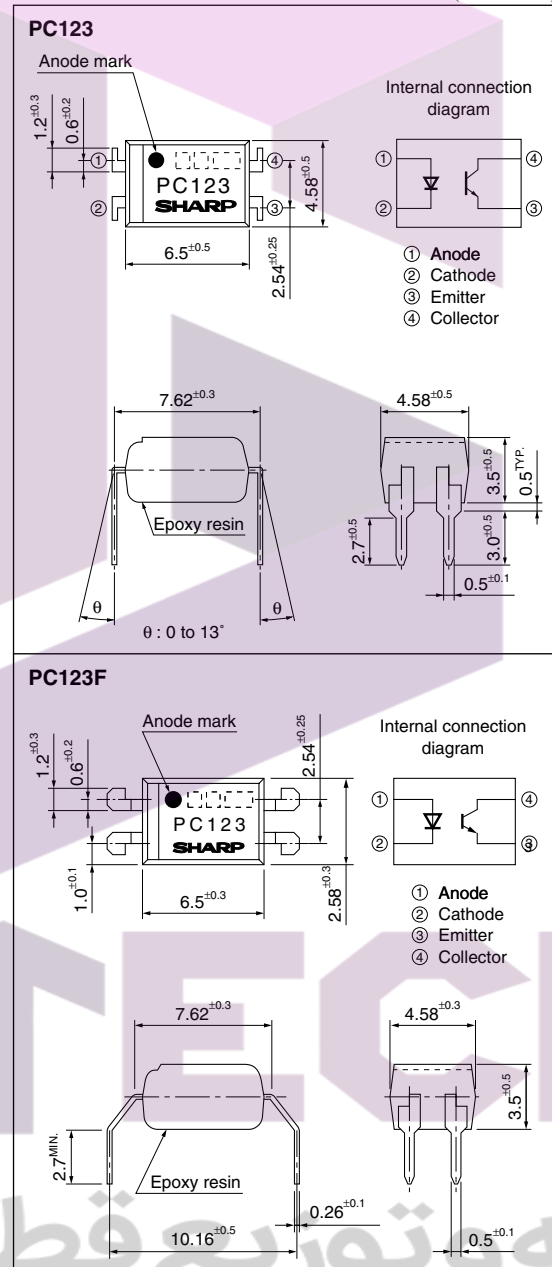

Notice In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.  
Internet Internet address for Electronic Components Group <http://sharp-world.com/ecg/>

### ■ Electro-optical Characteristics

(T<sub>a</sub>=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	-	1.2	1.4	V	
	Reverse current	I <sub>R</sub>	V <sub>R</sub> =4V	-	-	10	μA	
	Terminal capacitance	C <sub>t</sub>	V=0, f=1kHz	-	30	250	pF	
Output	Collector dark current	I <sub>CEO</sub>	V <sub>CE</sub> =50V, I <sub>F</sub> =0	-	-	100	nA	
	Collector-emitter breakdown voltage	BV <sub>CEO</sub>	I <sub>C</sub> =0.1mA, I <sub>F</sub> =0	70	-	-	V	
	Emitter-collector breakdown voltage	BV <sub>ECO</sub>	I <sub>E</sub> =10μA, I <sub>F</sub> =0	6	-	-	V	
Transfer characteristics	Collector current	I <sub>C</sub>	I <sub>F</sub> =5mA, V <sub>CE</sub> =5V	2.5	-	20	mA	
	Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>F</sub> =20mA, I <sub>C</sub> =1mA	-	0.1	0.2	V	
	Isolation resistance	R <sub>ISO</sub>	DC500V, 40 to 60%RH	5×10 <sup>10</sup>	10 <sup>11</sup>	-	Ω	
	Floating capacitance	C <sub>f</sub>	V=0, f=1MHz	-	0.6	1.0	pF	
	Cut-off frequency	f <sub>c</sub>	V <sub>CE</sub> =5V, I <sub>C</sub> =2mA, R <sub>L</sub> =100Ω, -3dB	-	80	-	kHz	
	Response time	Rise time	t <sub>r</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =2mA, R <sub>L</sub> =100Ω	-	4	18	μs
		Fall time	t <sub>f</sub>		-	3	18	μs

### ■ Rank Table

(I<sub>F</sub>=5mA, V<sub>CE</sub>=5V, T<sub>a</sub>=25°C)

Model No.	Rank mark	I <sub>C</sub> (mA)
PC123 / PC123Y / PC123F / PC123FY	A, B, S or no mark	2.5 to 20.0
PC123A / PC123Y1 / PC123F1 / PC123FY1	A	2.5 to 7.5
PC123B / PC123Y2 / PC123F2 / PC123FY2	B	5.0 to 12.5
PC123C / PC123Y5 / PC123F5 / PC123FY5	no mark	10.0 to 20.0
PC123S / PC123YS / PC123FS / PC123FY8	S	5.0 to 10.0

Fig.1 Forward Current vs. Ambient Temperature



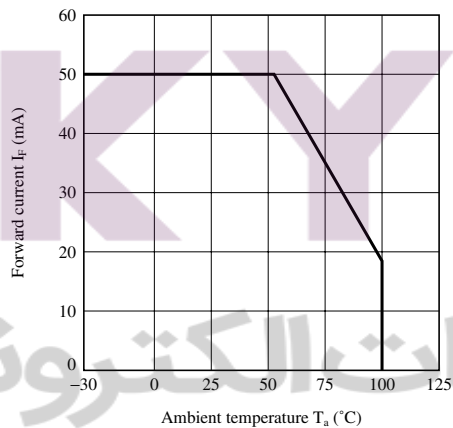



Fig.2 Diode Power Dissipation vs. Ambient Temperature

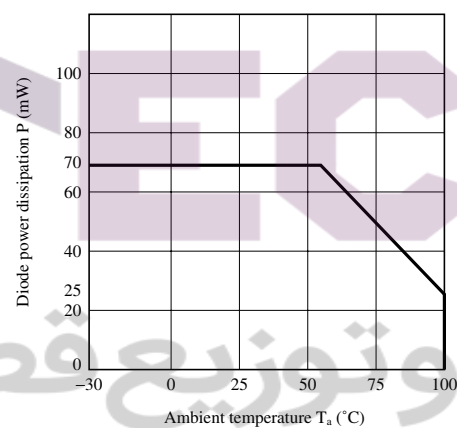


**Fig.3 Collector Power Dissipation vs. Ambient Temperature**

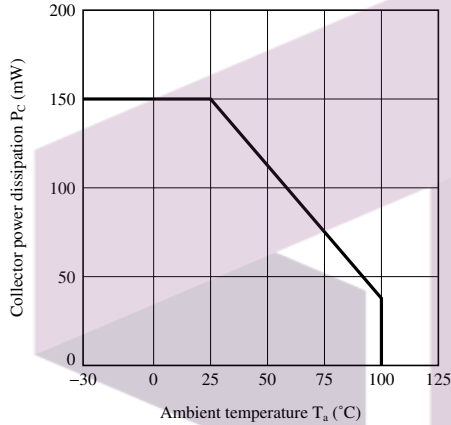


**Fig.4 Power Dissipation vs. Ambient Temperature**

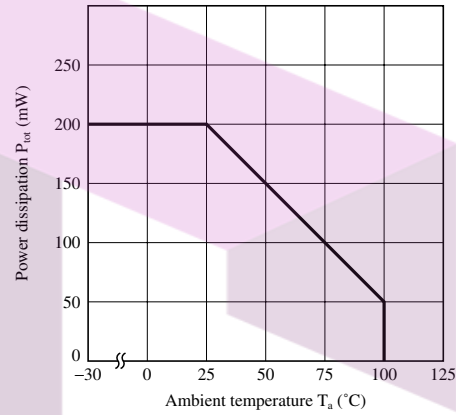


**Fig.5 Peak Forward Current vs. Duty Ratio**

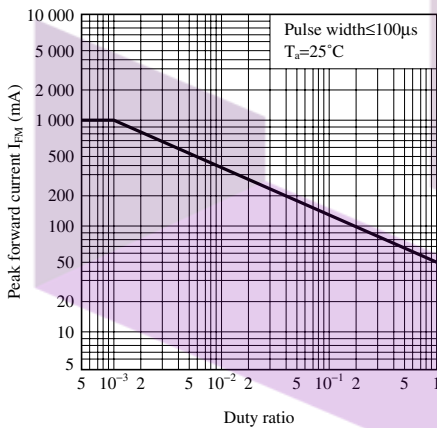


**Fig.6 Forward Current vs. Forward Voltage**

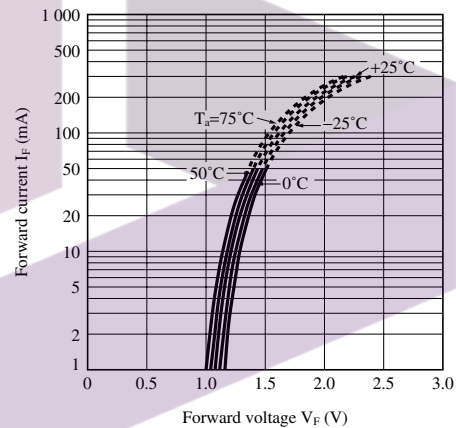


**Fig.7 Current Transfer Ratio vs. Forward Current**

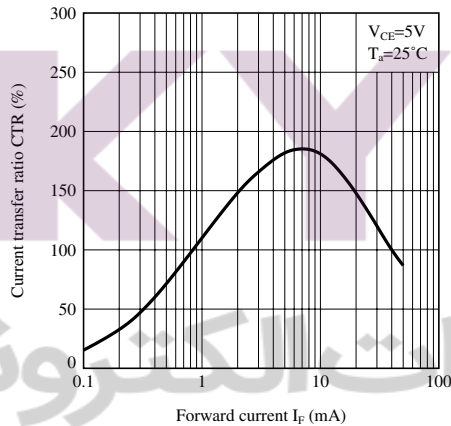


**Fig.8 Collector Current vs. Collector-emitter Voltage**

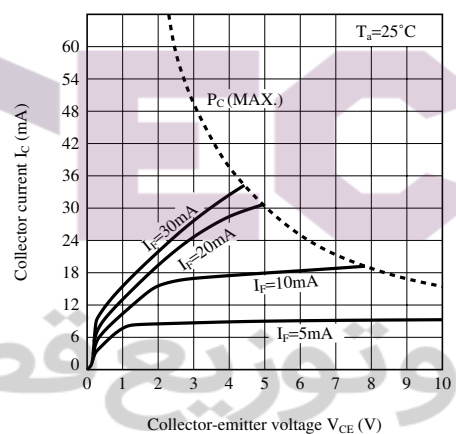


**Fig.9 Relative Current Transfer Ratio vs. Ambient Temperature**

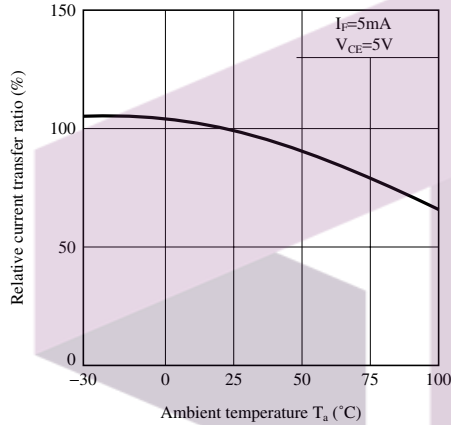


**Fig.10 Collector-emitter Saturation Voltage vs. Ambient Temperature**

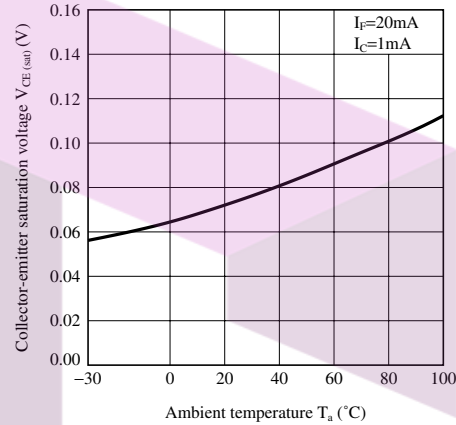


**Fig.11 Collector Dark Current vs. Ambient Temperature**

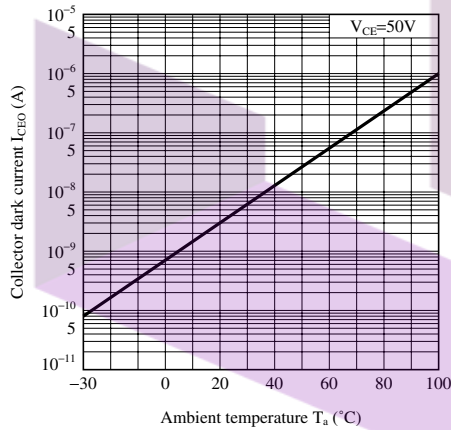


**Fig.12 Response Time vs. Load Resistance**

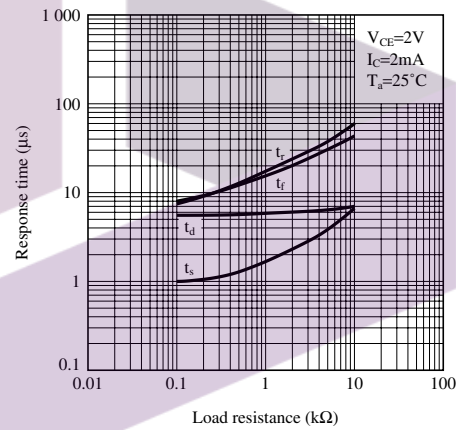

**Fig.13 Frequency Response**

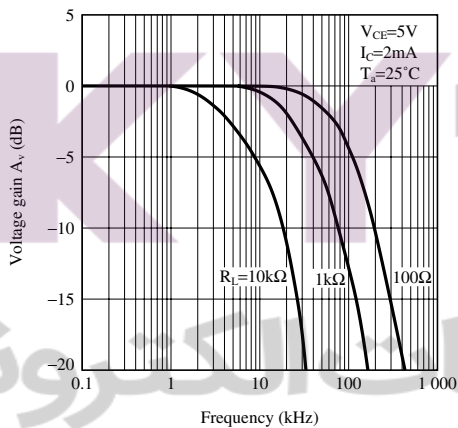

**Fig.14 Collector-emitter Saturation Voltage vs. Forward Current**

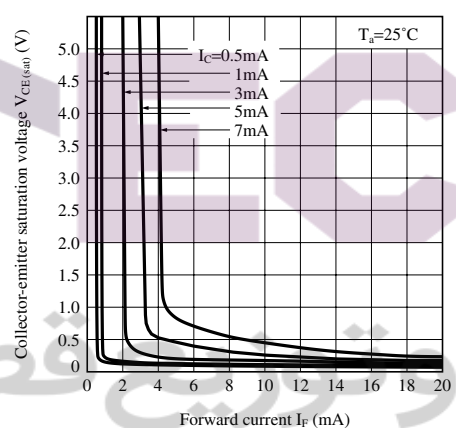

**SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.**

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

# SHARP®

## **NORTH AMERICA**

SHARP Microelectronics of the Americas  
5700 NW Pacific Rim Blvd.  
Camas, WA 98607, U.S.A.  
Phone: (1) 360-834-2500  
Fax: (1) 360-834-8903  
Fast Info: (1) 800-833-9437  
www.sharpsma.com

## **EUROPE**

SHARP Microelectronics Europe  
Division of Sharp Electronics (Europe) GmbH  
Sonninstrasse 3  
20097 Hamburg, Germany  
Phone: (49) 40-2376-2286  
Fax: (49) 40-2376-2232  
www.sharpsme.com

## **JAPAN**

SHARP Corporation  
Electronic Components & Devices  
22-22 Nagaike-cho, Abeno-Ku  
Osaka 545-8522, Japan  
Phone: (81) 6-6621-1221  
Fax: (81) 6117-725300/6117-725301  
www.sharp-world.com

## **TAIWAN**

SHARP Electronic Components  
(Taiwan) Corporation  
8F-A, No. 16, Sec. 4, Nanking E. Rd.  
Taipei, Taiwan, Republic of China  
Phone: (886) 2-2577-7341  
Fax: (886) 2-2577-7326/2-2577-7328

## **SINGAPORE**

SHARP Electronics (Singapore) PTE., Ltd.  
438A, Alexandra Road, #05-01/02  
Alexandra Technopark,  
Singapore 119967  
Phone: (65) 271-3566  
Fax: (65) 271-3855

## **KOREA**

SHARP Electronic Components  
(Korea) Corporation  
RM 501 Geosung B/D, 541  
Dohwa-dong, Mapo-ku  
Seoul 121-701, Korea  
Phone: (82) 2-711-5813 ~ 8  
Fax: (82) 2-711-5819

## **CHINA**

SHARP Microelectronics of China  
(Shanghai) Co., Ltd.  
28 Xin Jin Qiao Road King Tower 16F  
Pudong Shanghai, 201206 P.R. China  
Phone: (86) 21-5854-7710/21-5834-6056  
Fax: (86) 21-5854-4340/21-5834-6057

### **Head Office:**

No. 360, Bashen Road,  
Xin Development Bldg. 22  
Waigaoqiao Free Trade Zone Shanghai  
200131 P.R. China  
Email: smc@china.global.sharp.co.jp

## **HONG KONG**

SHARP-ROXY (Hong Kong) Ltd.  
3rd Business Division,  
17/F, Admiralty Centre, Tower 1  
18 Harcourt Road, Hong Kong  
Phone: (852) 28229311  
Fax: (852) 28660779  
www.sharp.com.hk

### **Shenzhen Representative Office:**

Room 13B1, Tower C,  
Electronics Science & Technology Building  
Shen Nan Zhong Road  
Shenzhen, P.R. China  
Phone: (86) 755-3273731  
Fax: (86) 755-3273735

تهیه و توزیع قطعات الکترونیک