




- ▼ Low On-Resistance
- ▼ Fast Switching
- ▼ Simple Drive Requirement
- ▼ RoHS Compliant





| | |
|--------------|----------------|
| BV_{DSS} | 30V |
| $R_{DS(ON)}$ | 13.5m Ω |
| I_D | 55A |

Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The TO-252 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters. The through-hole version (AP60N03GJ) is available for low-profile applications.



Absolute Maximum Ratings

| Symbol | Parameter | Rating | Units |
|-------------------------|--|------------|---------------|
| V_{DS} | Drain-Source Voltage | 30 | V |
| V_{GS} | Gate-Source Voltage | ± 20 | V |
| $I_D @ T_C=25^\circ C$ | Continuous Drain Current, $V_{GS} @ 10V$ | 55 | A |
| $I_D @ T_C=100^\circ C$ | Continuous Drain Current, $V_{GS} @ 10V$ | 35 | A |
| I_{DM} | Pulsed Drain Current ¹ | 215 | A |
| $P_D @ T_C=25^\circ C$ | Total Power Dissipation | 62.5 | W |
| | Linear Derating Factor | 0.5 | W/ $^\circ C$ |
| T_{STG} | Storage Temperature Range | -55 to 150 | $^\circ C$ |
| T_J | Operating Junction Temperature Range | -55 to 150 | $^\circ C$ |

Thermal Data

| Symbol | Parameter | Value | Units |
|--------|-------------------------------------|----------|--------------|
| Rthj-c | Thermal Resistance Junction-case | Max. 2.0 | $^\circ C/W$ |
| Rthj-a | Thermal Resistance Junction-ambient | Max. 110 | $^\circ C/W$ |

تهیه و توزیع قطعات الکترونیک


Electrical Characteristics @ $T_j=25^{\circ}\text{C}$ (unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|------------------------------|--|--|------|-------|-----------|-----------------------------|
| BV_{DSS} | Drain-Source Breakdown Voltage | $V_{GS}=0V, I_D=250\mu A$ | 30 | - | - | V |
| $\Delta BV_{DSS}/\Delta T_j$ | Breakdown Voltage Temperature Coefficient | Reference to 25°C , $I_D=1\text{mA}$ | - | 0.037 | - | $\text{V}/^{\circ}\text{C}$ |
| $R_{DS(ON)}$ | Static Drain-Source On-Resistance | $V_{GS}=10V, I_D=28A$ | - | 11.5 | 13.5 | $\text{m}\Omega$ |
| | | $V_{GS}=4.5V, I_D=22A$ | - | 18 | 20 | $\text{m}\Omega$ |
| $V_{GS(th)}$ | Gate Threshold Voltage | $V_{DS}=V_{GS}, I_D=250\mu A$ | 1 | - | 3 | V |
| g_{fs} | Forward Transconductance | $V_{DS}=10V, I_D=28A$ | - | 30 | - | S |
| I_{DSS} | Drain-Source Leakage Current ($T_j=25^{\circ}\text{C}$) | $V_{DS}=30V, V_{GS}=0V$ | - | - | 1 | μA |
| | Drain-Source Leakage Current ($T_j=150^{\circ}\text{C}$) | $V_{DS}=24V, V_{GS}=0V$ | - | - | 25 | μA |
| I_{GSS} | Gate-Source Leakage | $V_{GS}=\pm 20V$ | - | - | ± 100 | nA |
| Q_g | Total Gate Charge ² | $I_D=28A$ | - | 22.4 | - | nC |
| Q_{gs} | Gate-Source Charge | $V_{DS}=24V$ | - | 2.7 | - | nC |
| Q_{gd} | Gate-Drain ("Miller") Charge | $V_{GS}=5V$ | - | 14 | - | nC |
| $t_{d(on)}$ | Turn-on Delay Time ² | $V_{DS}=15V$ | - | 7.4 | - | ns |
| t_r | Rise Time | $I_D=28A$ | - | 81 | - | ns |
| $t_{d(off)}$ | Turn-off Delay Time | $R_G=3.3\Omega, V_{GS}=10V$ | - | 24 | - | ns |
| t_f | Fall Time | $R_D=0.53\Omega$ | - | 18 | - | ns |
| C_{iss} | Input Capacitance | $V_{GS}=0V$ | - | 950 | - | pF |
| C_{oss} | Output Capacitance | $V_{DS}=25V$ | - | 440 | - | pF |
| C_{rss} | Reverse Transfer Capacitance | $f=1.0\text{MHz}$ | - | 145 | - | pF |

Source-Drain Diode

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|----------|---|--|------|------|------|-------|
| I_S | Continuous Source Current (Body Diode) | $V_D=V_G=0V, V_S=1.3V$ | - | - | 55 | A |
| I_{SM} | Pulsed Source Current (Body Diode) ¹ | | - | - | 215 | A |
| V_{SD} | Forward On Voltage ² | $T_j=25^{\circ}\text{C}, I_S=55A, V_{GS}=0V$ | - | - | 1.3 | V |

Notes:

1. Pulse width limited by safe operating area.
2. Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

تهیه و توزیع قطعات الکترونیک

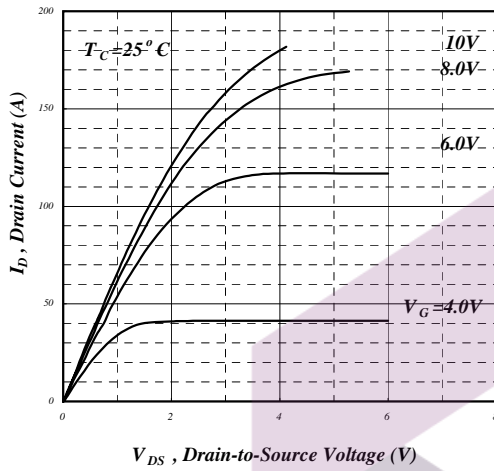


Fig 1. Typical Output Characteristics

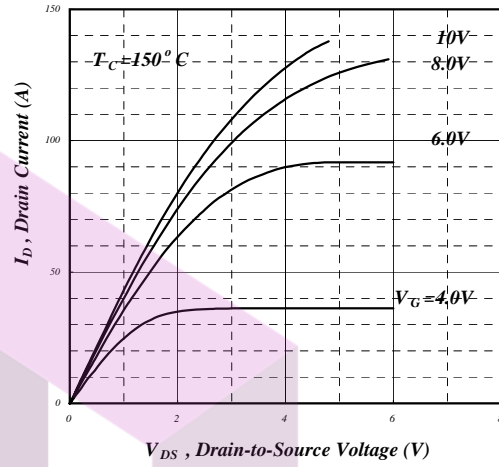


Fig 2. Typical Output Characteristics

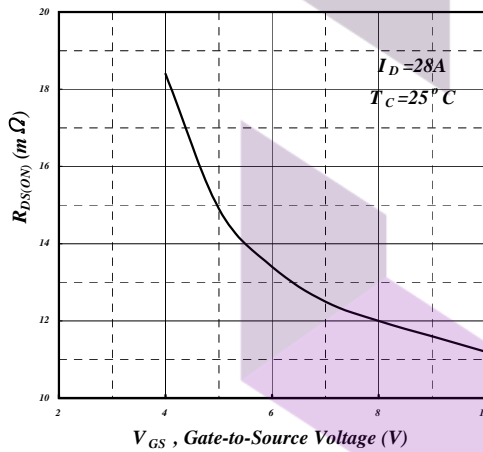


Fig 3. On-Resistance v.s. Gate Voltage

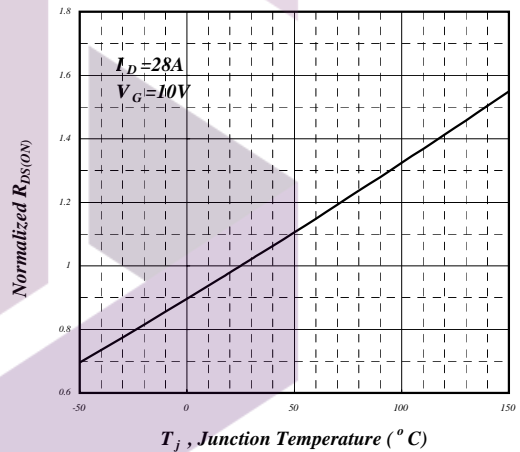


Fig 4. Normalized On-Resistance

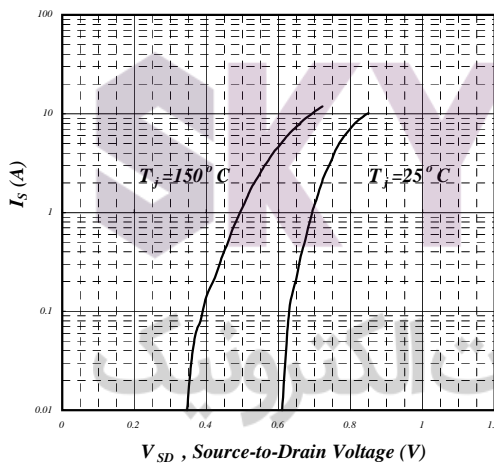


Fig 5. Forward Characteristic of Reverse Diode

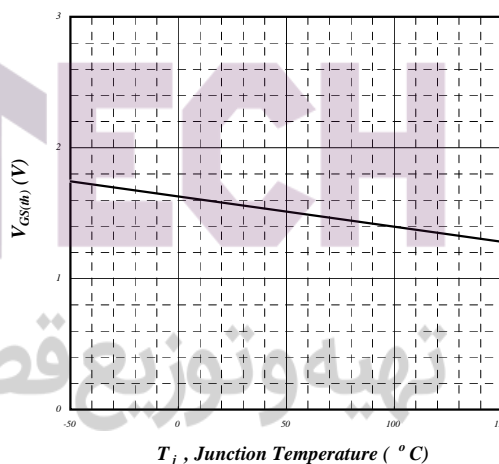


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

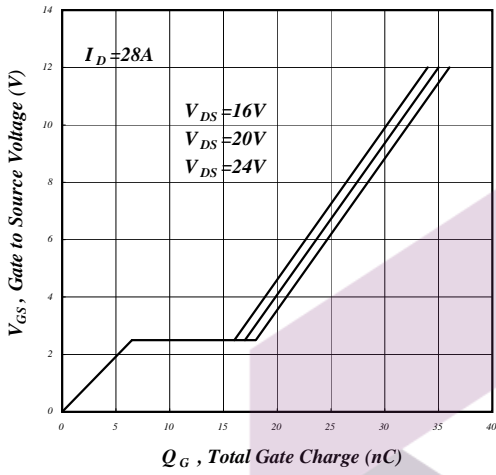


Fig 7. Gate Charge Characteristics

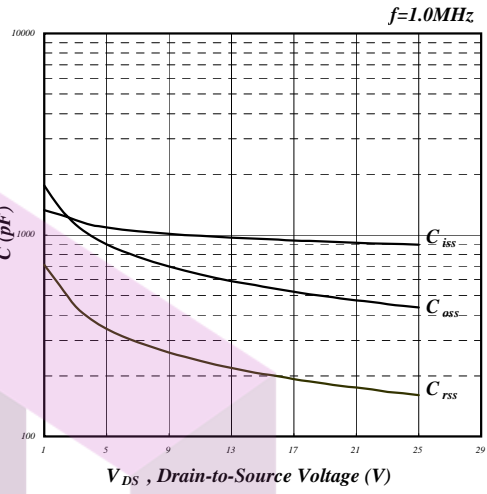


Fig 8. Typical Capacitance Characteristics

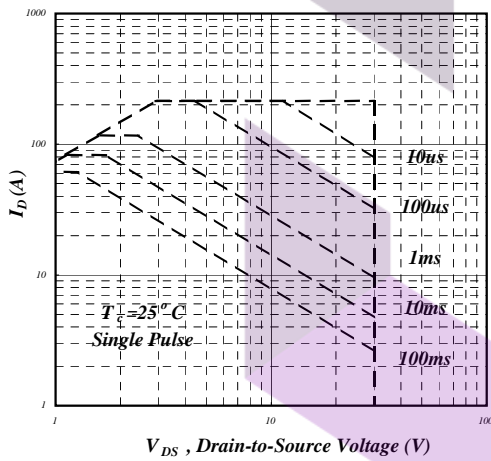


Fig 9. Maximum Safe Operating Area

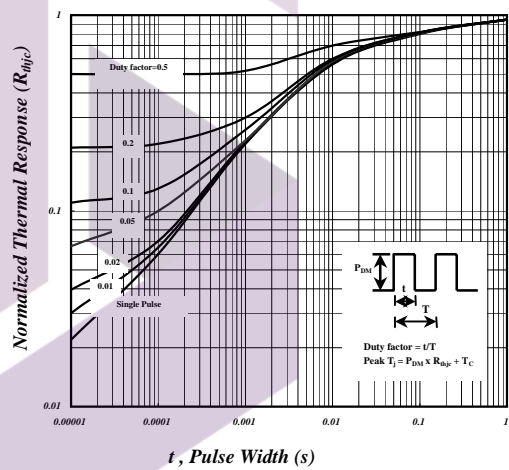


Fig 10. Effective Transient Thermal Impedance

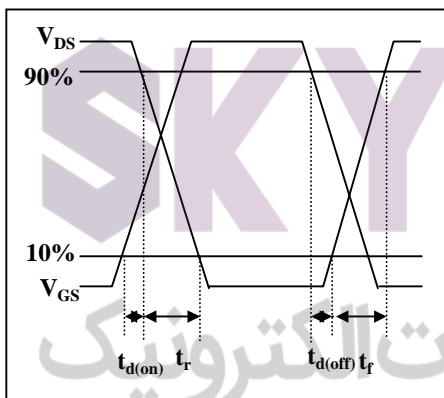


Fig 11. Switching Time Waveform

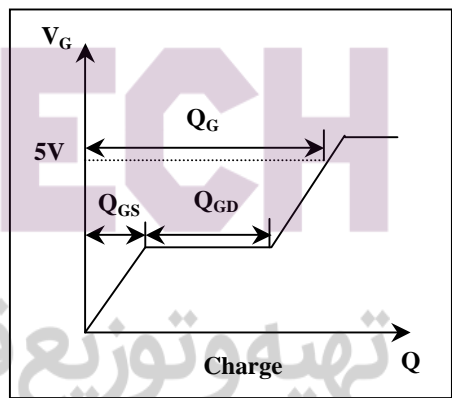


Fig 12. Gate Charge Waveform