

RS1A THRU RS1M

Surface Mount Fast Recovery Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Fast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: SMAF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 27mg / 0.00095oz

Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Cathode |
| 2 | Anode |



Top View

Simplified outline SMAF and symbol

| Parameter | Symbols | RS1A | RS1B | RS1D | RS1G | RS1J | RS1K | RS1M | Units | | | | |
|--|--------------------------------------|------------|------|------|------|------|------|------|-------|--|--|--|--|
| Maximum Repetitive Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | | | | |
| Maximum RMS voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V | | | | |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | | | | |
| Maximum Average Forward Rectified Current at T _c = 125 °C | I _{F(AV)} | 1 | | | | | | A | | | | | |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load | I _{FSM} | 30 | | | | | | A | | | | | |
| Maximum Forward Voltage at 1 A | V _F | 1.3 | | | | | | V | | | | | |
| Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a = 125 °C | I _R | 5 50 | | | | | | µA | | | | | |
| Typical Junction Capacitance at V _R =4V, f=1MHz | C _j | 15 | | | | | | pF | | | | | |
| Maximum Reverse Recovery Time ⁽¹⁾ | t _{rr} | 150 | | 250 | | 500 | | ns | | | | | |
| Typical Thermal Resistance ⁽²⁾ | R _{θJA} R _{θJL} | 80 30 | | | | | | °C/W | | | | | |
| Operating and Storage Temperature Range | T _j , T _{stg} | -55 ~ +150 | | | | | | °C | | | | | |

(1) Measured with I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

RS1A THRU RS1M

Fig.1 Forward Current Derating Curve

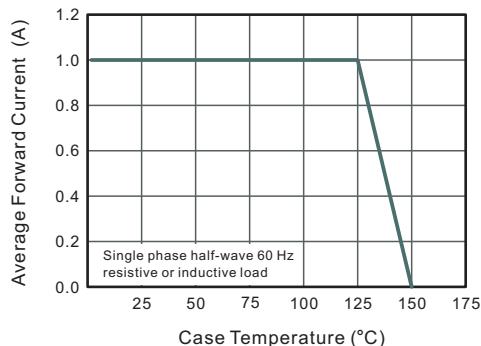


Fig.2 Typical Reverse Characteristics

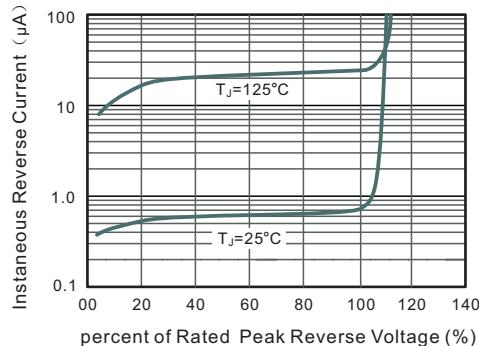


Fig.3 Typical Instantaneous Forward Characteristics

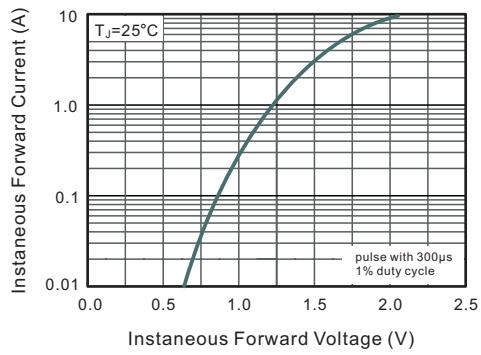


Fig.4 Typical Junction Capacitance


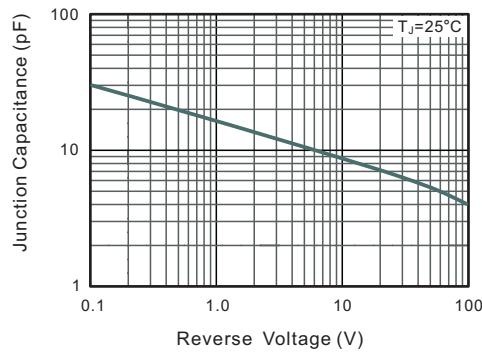



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

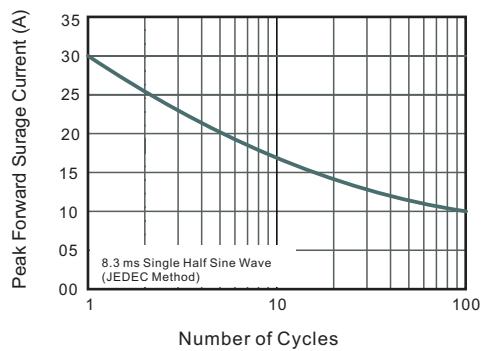

RS1A THRU RS1M

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

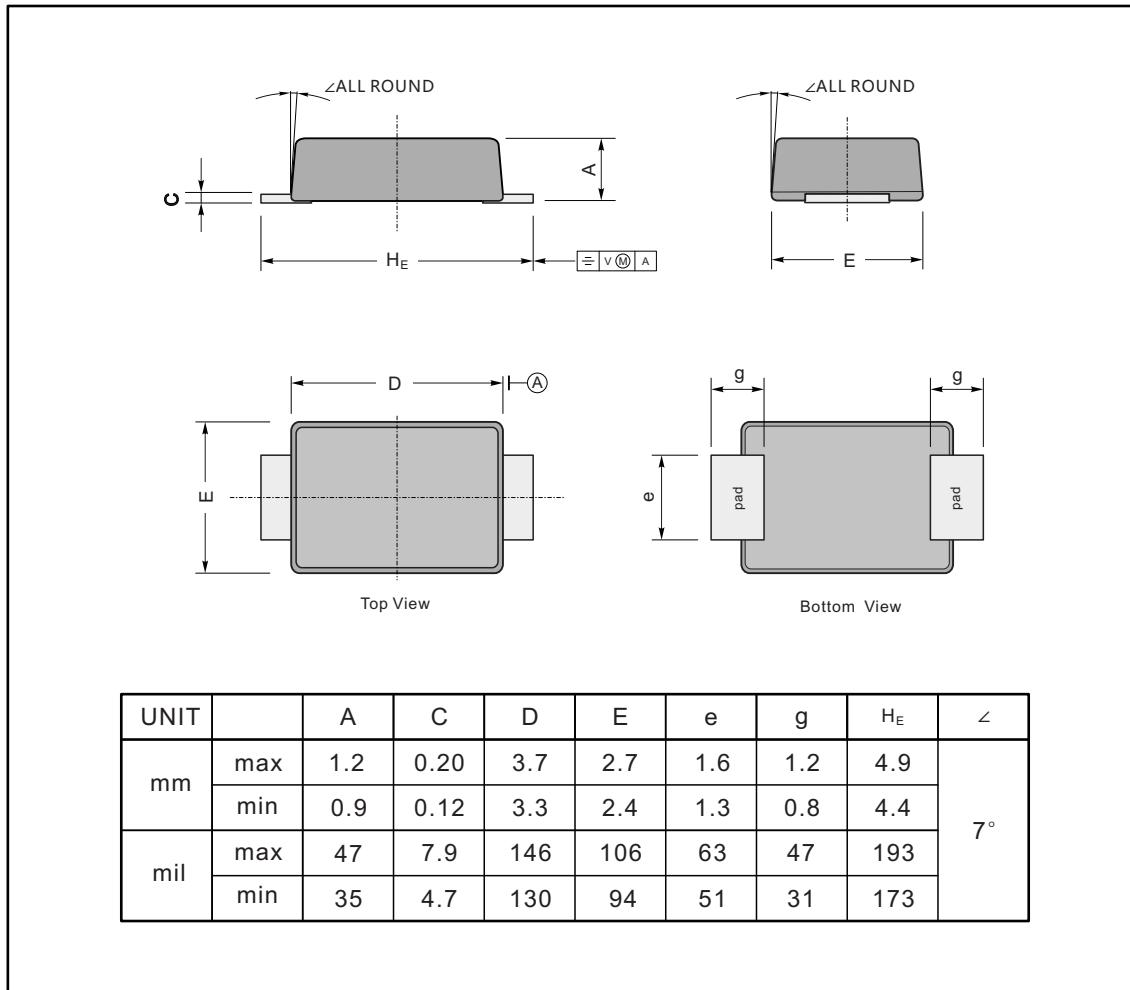

The recommended mounting pad size

