2 RESET

- Very Low Power Consumption . . . 2 mW Typ at $V_{DD} = 5 \text{ V}$
- Capable of Operation in Astable Mode
- **CMOS Output Capable of Swinging Rail to**
- **High Output-Current Capability** Sink 100 mA Typ Source 10 mA Typ
- Output Fully Compatible With CMOS, TTL, and MOS
- **Low Supply Current Reduces Spikes During Output Transitions**
- Single-Supply Operation From 2 V to 15 V
- Functionally interchangeable With the NE556; Has Same Pinout

description

The TLC556 series are monolithic timing circuits fabricated using the TI LinCMOS™ process, which provides full compatibility with CMOS, TTL, and MOS logic and operates at frequencies up to 2 MHz. Accurate time delays and oscillations are possible with smaller, less-expensive timing capacitors than the NE556 because of the high input impedance. Power consumption is low across the full range of power supply voltages.

Like the NE556, the TLC556 has a trigger level approximately one-third of the supply voltage and

D, J, OR N PACKAGE (TOP VIEW) 1 DISCH∏ 14 | VDD 1 THRES 2 13 2 DISCH 1 CONT 12 THRES 3 1 RESET 4 11 2 CONT 1 OUT **1** 5 10 **1** 2 RESET 1 TRIG**∏** 6 9 1 2 OUT 8 2 TRIG GND **FK PACKAGE** (TOP VIEW) THRES DISCH NC VDD 2 DISCH 2 1 20 19 1 CONT 18П 2 THRES NC NC 17 2 CONT 1 RESET 16 NC NC 15

10 11 12 13

TRIG OUT

NC-No internal connection

1 OUT

a threshold level approximately two-thirds of the supply voltage. These levels can be altered by use of the control voltage terminal. When the trigger input falls below the trigger level, the flip-flop is set and the output goes high. If the trigger input is above the trigger level and the threshold input is above the threshold level, the flip-flop is reset and the output is low. The reset input can override all other inputs and can be used to initiate a new timing cycle. If the reset input is low, the flip-flop is reset and the output is low. Whenever the output is low, a low-impedance path is provided between the discharge terminal and ground.

While the CMOS output is capable of sinking over 100 mA and sourcing over 10 mA, the TLC556 exhibits greatly reduced supply-current spikes during output transitions. This minimizes the need for the large decoupling capacitors required by the NE556.

These devices have internal electrostatic-discharge (ESD) protection circuits that prevent catastrophic failures at voltages up to 2000 V as tested under MIL-STD-883C, Method 3015. However, care should be exercised in handling these devices, as exposure to ESD may result in degradation of the device parametric performance.

All unused inputs should be tied to an appropriate logic level to prevent false triggering.

The TLC556C is characterized for operation from 0°C to 70°C. The TLC556I is characterized for operation from −40°C to 85°C. The TLC556M is characterized for operation over the full military temperature range of −55°C to 125°C.

LinCMOS is a trademark of Texas Instruments Incorporated.

AVAILABLE OPTIONS

| т. | V | | PACK | AGE | | CHIP FORM |
|-------------------------|--------------------------|----------------------|----------------------|--------------------|--------------------|-----------|
| T _A RANGE | V _{DD} RANGE | SMALL OUTLINE (D) | CHIP CARRIER (FK) | CERAMIC DIP (J) | PLASTIC DIP (N) | (Y) |
| O°C | 2 V | | | | | |
| to | to | TLC556CD | | | TLC556CN | TLC556Y |
| 70°C | 18 V | | | | | |
| -40°C | 3 V | | | | | |
| to | to | TLC556ID | | | TLC556IN | |
| 85°C | 18 V | | | | | |
| −55°C | 5 V | | | | | |
| to | to | TLC556MD | TLC556MFK | TLC556MJ | TLC556MN | |
| 125°C | 18 V | | | | | |


The D package is available taped and reeled. Add the suffix R to the device type (e.g., TLC556CDR).

FUNCTION TABLE

| RESET VOLTAGE† | TRIGGER VOLTAGE† | THRESHOLD VOLTAGE† | ОИТРИТ | DISCHARGE SWITCH |
|-------------------|---------------------|-----------------------|---------------|---------------------|
| < MIN | Irrelevant | Irrelevant | L | On |
| > MAX | < MIN | Irrelevant | Н | Off |
| >MAX | >MAX | >MAX | L | On |
| > MAX | > MAX | < MIN | As previously | established |

[†] For conditions shown as MIN or MAX, use the appropriate value specified under electrical characteristics.

functional block diagram (each timer)

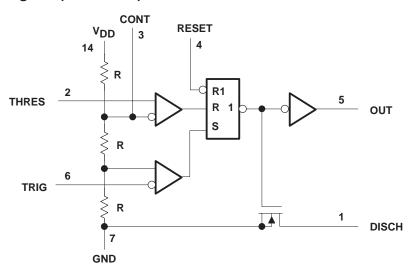


RESET can override TRIG and THRES. TRIG can override THRES.

Pin numbers shown are for the D, J, or N packages.



TLC556Y chip information

These chips, properly assembled, display characteristics similar to the TLC556 (see electrical table). Thermal compression or ultrasonic bonding may be used on the doped aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

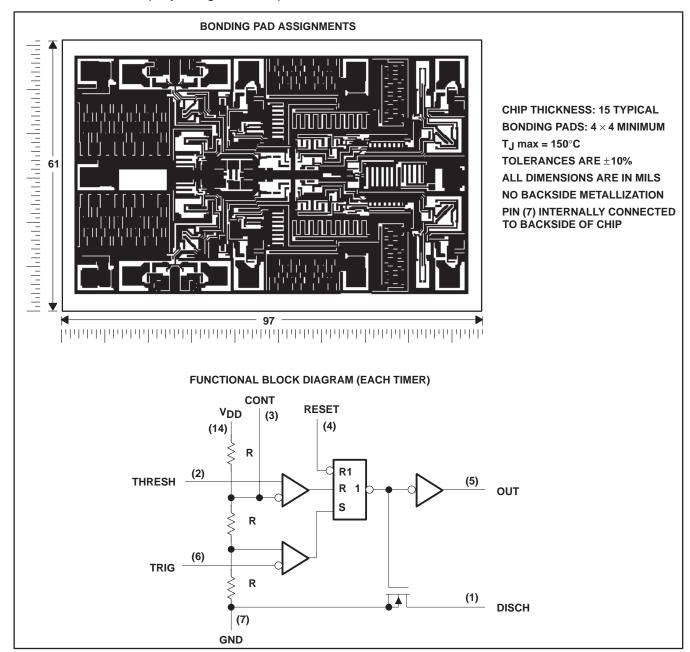

SLFS047B - FEBRUARY 1984 - REVISED SEPTEMBER 1997

absolute maximum ratings over operating free-air temperature (unless otherwise noted)

| | | TLC556C | TLC556I | TLC556M | UNIT | |
|--|------------|------------------------------|---------------------------------------|---------------------------------------|------|--|
| Supply voltage, V _{DD} (see Note 1) | 18 | 18 | 18 | V | | |
| Input voltage range, V _I | | -0.3 to $V_{\mbox{DD}}$ | -0.3 to $V_{\mbox{\scriptsize DD}}$ | -0.3 to $V_{\mbox{\scriptsize DD}}$ | V | |
| Sink current, discharge or output | | 150 | 150 | 150 | mA | |
| Source current, output | | 15 | 15 | 15 | mA | |
| Continuous total power dissipation | | See Dissipation Rating Table | | | | |
| Operating free-air temperature range | | 0 to 70 | -40 to 85 | -55 to 125 | °C | |
| Storage temperature range | | -65 to 150 | -65 to 150 | -65 to 150 | °C | |
| Case temperature for 60 seconds | FK package | | | 260 | | |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds | J package | | | 300 | °C | |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260 | 260 | | | | |

NOTE 1: All voltage values are with respect to network ground terminal.

DISSIPATION RATING TABLE

| PACKAGE | $T_{\mbox{\scriptsize A}} \leq 25^{\circ}\mbox{\scriptsize C}$ POWER RATING | DERATING FACTOR ABOVE T _A = 25°C | T _A = 70°C POWER RATING | T _A = 85°C POWER RATING | T _A = 125°C POWER RATING |
|---------|---|--|---------------------------------------|---------------------------------------|--|
| D | 950 mW | 7.6 mW/°C | 608 mW | 494 mW | N/A |
| FK | 1375 mW | 11.0 mW/°C | 880 mW | 715 mW | 275 mW |
| J | 1375 mW | 11.0 mW/°C | 880 mW | 715 mW | 275 mW |
| N | 1150 mW | 9.2 mW/°C | 736 mW | 598 mW | N/A |

recommended operating conditions

| | | MIN | MAX | UNIT |
|--|---------|-----|-----|------|
| Supply voltage, V _{DD} | | 2 | 15 | V |
| | TLC556C | 0 | 70 | |
| Operating free-air temperature range, TA | TLC556I | -40 | 85 | °C |
| | TLC556M | -55 | 125 | |

electrical characteristics at specified free-air temperature, V_{DD} = 2 V for TLC556C, V_{DD} = 3 V for TLC556I

| | DADAMETED | TEST | T. T | Т | LC556C | | 7 | TLC556I | | UNIT |
|----------------------|--|---------------------------|------------------|------|--------|------|------|---------|-------|------|
| | PARAMETER | CONDITIONS | T _A † | MIN | TYP | MAX | MIN | TYP | MAX | UNII |
| \/ | Input throughold voltage | | 25°C | 0.95 | 1.33 | 1.65 | 1.6 | 2 | 2.4 | V |
| VIT | Input threshold voltage | | Full range | 0.85 | | 1.75 | 1.5 | | 2.5 | V |
| | Threshold current | | 25°C | | 10 | | | 10 | | ~ A |
| | Threshold current | | MAX | | 75 | | | 150 | | pА |
| V Trigger veltege | | | 25°C | 0.4 | 0.67 | 0.95 | 0.71 | 1 | 1.29 | V |
| V(trigger) | Trigger voltage | | Full range | 0.3 | | 1.05 | 0.61 | | 1.39 | V |
| la i | Trigger ourrent | | 25°C | | 10 | | | 10 | | n A |
| l(trigger) | Trigger current | | MAX | | 75 | | | 150 | | pΑ |
| N/ Peret veltere | | | 25°C | 0.4 | 1.1 | 1.5 | 0.4 | 1.1 | 1.5 | V |
| V _(reset) | Reset voltage | | Full range | 0.3 | | 1.8 | 0.3 | | 1.8 | V |
| 1 | Decet comment | | 25°C | | 10 | | | 10 | | - 1 |
| (reset) | Reset current | | MAX | | 75 | | | 150 | | pА |
| | Control voltage (open circuit) as a percentage of supply voltage | | MAX | | 66.7% | | | 66.7% | | |
| | Discharge switch on-state volt- | 1 1 1 | 25°C | | 0.04 | 0.2 | | 0.03 | 0.2 | V |
| | age | I _{OL} = 1 mA | Full range | | | 0.25 | | | 0.375 | V |
| | Discharge switch off-state cur- | | 25°C | | 0.1 | | | 0.1 | | nA |
| | rent | | MAX | | 0.5 | | | 120 | | ΠA |
| V | Lieb level autout valtage | J 200 A | 25°C | 1.5 | 1.9 | | 1.5 | 1.9 | | V |
| VOH | High-level output voltage | I _{OH} = -300 μA | Full range | 1.5 | | | 2.5 | | | V |
| Vai | Low lovel output voltage | lo: -1 mA | 25°C | | 0.07 | 0.3 | | 0.07 | 0.3 | V |
| VOL | Low-level output voltage | I _{OL} = 1 mA | Full range | | | 0.35 | | | 0.4 | V |
| 1 | Cupply ourrent | See Note 2 | 25°C | | 130 | 500 | | 130 | 500 | |
| IDD | D Supply current | See Note 2 | Full range | | | 800 | | | 1000 | μΑ |

[†] Full range is 0°C to 70°C for TLC556C and –40°C to 85°C for TLC556I.

NOTE 2: These values apply for the expected operating configurations in which THRES is connected directly to DISCH or TRIG.

TLC556, TLC556Y DUAL LinCMOS™ TIMERS

SLFS047B - FEBRUARY 1984 - REVISED SEPTEMBER 1997

electrical characteristics at specified free-air temperature, $V_{DD} = 5 V$

| | PARAMETER | TEST | - + | ٦ | LC556C | | | TLC556I | | Т | LC556M | | UNIT |
|------------------------|--|--------------------------|------------------|------|--------|------|------|---------|------|------|--------|------|------|
| | PARAMETER | CONDITIONS | T _A † | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | UNII |
| l, | Input threshold | | 25°C | 2.8 | 3.3 | 3.8 | 2.8 | 3.3 | 3.8 | 2.8 | 3.3 | 3.8 | V |
| VIT | voltage | | Full range | 2.7 | | 3.9 | 2.7 | | 3.9 | 2.7 | | 3.9 | V |
| | There had a comment | | 25°C | | 10 | | | 10 | | | 10 | | - 0 |
| | Threshold current | | MAX | | 75 | | | 150 | | | 5000 | | pА |
| Ţ, | T: | | 25°C | 1.36 | 1.66 | 1.96 | 1.36 | 1.66 | 1.96 | 1.36 | 1.66 | 1.96 | V |
| V _(trigger) | Trigger voltage | | Full range | 1.26 | | 2.06 | 1.26 | | 2.06 | 1.26 | | 2.06 | V |
| ĺ. | - : | | 25°C | | 10 | | | 10 | | | 10 | | |
| ^I (trigger) | Trigger current | | MAX | | 75 | | | 150 | | | 5000 | | pΑ |
| | 5 | | 25°C | 0.4 | 1.1 | 1.5 | 0.4 | 1.1 | 1.5 | 0.4 | 1.1 | 1.5 | ., |
| V _(reset) | Reset voltage | | Full range | 0.3 | | 1.8 | 0.3 | | 1.8 | 0.3 | | 1.8 | V |
| | | 1 | 25°C | | 10 | | | 10 | | | 10 | | |
| I(reset) | Reset current | | MAX | | 75 | | | 150 | | | 5000 | | pΑ |
| | Control voltage (open circuit) as a percentage of supply voltage | | MAX | | 66.7% | | | 66.7% | | | 66.7% | | |
| | Discharge switch | 10 1 | 25°C | | 0.15 | 0.5 | | 0.15 | 0.5 | | 0.15 | 0.5 | ., |
| | on-state voltage | $I_{OL} = 10 \text{ mA}$ | Full range | | | 0.6 | | | 0.6 | | 0.6 | | V |
| | Discharge switch | | 25°C | | 0.1 | | | 0.1 | | | 0.1 | | 0 |
| | off-state current | | MAX | | 0.5 | | | 2 | | | 120 | | nA |
| ., | High-level output | | 25°C | 4.1 | 4.8 | | 4.1 | 4.8 | | 4.1 | 4.8 | | ., |
| VOH | voltage | $I_{OH} = -1 \text{ mA}$ | Full range | 4.1 | | | 4.1 | | | 4.1 | | | V |
| | | 0 4 | 25°C | | 0.21 | 0.4 | | 0.21 | 0.4 | | 0.21 | 0.4 | |
| | | $I_{OL} = 8 \text{ mA}$ | Full range | | | 0.5 | | | 0.5 | | | 0.6 | |
| l., | ., Low-level output | | 25°C | | 0.13 | 0.3 | | 0.13 | 0.3 | | 0.13 | 0.3 | ., |
| VOL | voltage | lou = 3.2 mA | Full range | | | 0.4 | | | 0.4 | | | 0.45 | y . |
| | Ţ, | | 25°C | | 0.08 | 0.3 | | 0.08 | 0.3 | | 0.08 | 0.3 | |
| | | | Full range | | | 0.35 | | | 0.35 | | | 0.4 | |
| | DD Supply current See Note 2 | See Note 2 | 25°C | | 340 | 700 | | 340 | 700 | | 340 | 700 | ^ |
| DD | | Full range | | | 1000 | | | 1200 | | | 1400 | μΑ | |

[†] Full range is 0°C to 70°C for TLC556C, -40°C to 85°C for TLC556I, and -55°C to 125°C for TLC556M.

NOTE 2: These values apply for the expected operating configurations in which THRES is connected directly to DISCH or to TRIG.



electrical characteristics at specified free-air temperature, V_{DD} = 15 V

| | DADAMETER | TEST | T. T | 7 | LC556C | | | TLC556I | | Т | LC556M | | | |
|------------------------|--|--------------------------|-------------------|------------|------------|-------|------|---------|-------|------|--------|-------|------|---|
| | PARAMETER | CONDITIONS | T _A † | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | UNIT | |
| VIT | Input threshold voltage | | 25°C | 9.45 | 10 | 10.55 | 9.45 | 10 | 10.55 | 9.45 | 10 | 10.55 | V | |
| ٧١١ | input tilleshold voltage | | Full range | 9.35 | | 10.65 | 9.35 | | 10.65 | 9.35 | | 10.65 | V | |
| | Threshold current | | 25°C | | 10 | | | 10 | | | 10 | | pA | |
| | Threshold current | | MAX | | 75 | | | 150 | | | 5000 | | PΛ | |
| V/ | Trigger voltage | | 25°C | 4.65 | 5 | 5.35 | 4.65 | 5 | 5.35 | 4.65 | 5 | 5.35 | V | |
| V _(trigger) | Trigger voltage | | Full range | 4.55 | | 5.45 | 4.55 | | 5.45 | 4.55 | | 5.45 | V | |
| la · · · · | Trigger current | | 25°C | | 10 | | | 10 | | | 10 | | pА | |
| I(trigger) | ringger current | | MAX | | 75 | | | 150 | | | 5000 | | PΛ | |
| V/ 0 | Reset voltage | | 25°C | 0.4 | 1.1 | 1.5 | 0.4 | 1.1 | 1.5 | 0.4 | 1.1 | 1.5 | V | |
| V _(reset) | iteset voltage | | Full range | 0.3 | | 1.8 | 0.3 | | 1.8 | 0.3 | | 1.8 | V | |
| 1/ | Reset current | | 25°C | | 10 | | | 10 | | | 10 | | pA | |
| I(reset) | Reset current | | MAX | | 75 | | | 150 | | | 5000 | | PΑ | |
| | Control voltage (open circuit) as a percentage of supply voltage | | MAX | | 66.7% | | | 66.7% | | | 66.7% | | | |
| | Discharge switch on- | lov = 100 mA | 25°C | | 0.8 | 1.7 | | 0.8 | 1.7 | | 0.8 | 1.7 | ., | |
| | state voltage | I _{OL} = 100 mA | Full range | | | 1.8 | | | 1.8 | | | 1.8 | V | |
| | Discharge switch off- | | 25°C | | 0.1 | | | 0.1 | | | 0.1 | | A | |
| | state current | | MAX | | 0.5 | | | 2 | | | 120 | | nA | |
| | | 1 10 mA | 25°C | 12.5 | 14.2 | | 12.5 | 14.2 | | 12.5 | 14.2 | | | |
| | | I _{OH} = -10 mA | Full range | 12.5 | | | 12.5 | | | 12.5 | | | | |
| V | High-level output | I _{OH} = -5 mA | 25°C | 13.5 | 14.6 | | 13.5 | 14.6 | | 13.5 | 14.6 | | V | |
| VOH | voltage | 10H = -3 IIIA | Full range | 13.5 | | | 13.5 | | | 13.5 | | | v | |
| | | lou - 1 mA | 25°C | 14.2 | 14.9 | | 14.2 | 14.9 | | 14.2 | 14.9 | | | |
| | | I _{OH} = -1 mA | Full range | 14.2 | | | 14.2 | | | 14.2 | | | | |
| | | 100 m A | 25°C | | 1.28 | 3.2 | | 1.28 | 3.2 | | 1.28 | 3.2 | | |
| | | I _{OL} = 100 mA | Full range | | | 3.6 | | | 3.7 | | | 3.8 | | |
| V | Low-level output | 1 F0 m 1 | 25°C | | 0.63 | 1 | | 0.63 | 1 | | 0.63 | 1 | | |
| VOL | voltage | I _{OL} = 50 mA | Full range | | | 1.3 | | | 1.4 | | | 1.5 | V 5 | |
| | Ī | la. – 10 m/s | 25°C | | 0.12 | 0.3 | | 0.12 | 0.3 | | 0.12 | 0.3 | | |
| | | I _{OL} = 10 mA | Full range | | | 0.4 | | | 0.4 | | | 0.45 | | |
| loo | Supply current See I | See Note 2 | 25°C | | 0.72 | 1.2 | | 0.72 | 1.2 | | 0.72 | 1.2 | mΛ | |
| IDD | | Supply current | Supply current Se | See Note 2 | Full range | | | 1.6 | | | 1.8 | | | 2 |

[†] Full range is 0°C to 70°C for TLC556C, -40°C to 85°C for TLC556I, and -55°C to 125°C for TLC556M.

NOTE 2: These values apply for the expected operating configurations in which THRES is connected directly to DISCH or TRIG.

electrical characteristics, $V_{DD} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$

| | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------------|------------------------------------|--------------------------|------|------|------|------|
| VIT | Input threshold voltage | | 2.8 | 3.3 | 3.8 | V |
| | Threshold current | | | 10 | | pА |
| V _(trigger) | Trigger voltage | | 1.36 | 1.66 | 1.96 | V |
| I _(trigger) | Trigger current | | | 10 | | рА |
| V _(reset) | Reset voltage | | 0.4 | 1.1 | 1.5 | V |
| I _(reset) | Reset current | | | 10 | | pА |
| | Discharge switch on-state voltage | I _{OL} = 10 mA | | 0.15 | 0.5 | V |
| | Discharge switch off-state current | | | 0.1 | | nA |
| Vон | High-level output voltage | $I_{OH} = -1 \text{ mA}$ | 4.1 | 4.8 | | V |
| | | $I_{OL} = 8 \text{ mA}$ | | 0.21 | 0.4 | |
| VOL | Low-level output voltage | $I_{OL} = 5 \text{ mA}$ | | 0.13 | 0.3 | V |
| | | I _{OL} = 2.1 mA | | 0.08 | 0.3 | |
| I _{DD} | Supply current | See Note 2 | | 3.40 | 700 | μΑ |

NOTE 2: These values apply for the expected operating configurations in which THRES is connected directly to DISCH or TRIG.

operating characteristics, V_{DD} = 5 V, T_A = 25°C (unless otherwise noted)

| | PARAMETER | TES ⁻ | CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------|---|--|---|-----|-----|-----|------|
| | Initial error of timing interval † | $V_{DD} = 5 \text{ V to } 15 \text{ V},$ | $R_A = R_B = 1 \text{ k}\Omega \text{ to } 100 \text{ k}\Omega$ | | 1% | 3% | |
| | Supply voltage sensitivity of timing interval | $C_T = 0.1 \mu F$, | See Note 3 | | 0.1 | 0.5 | %/V |
| t _r | Output pulse rise time | $R_{I} = 10 M\Omega$ | C _I = 10 pF | | 20 | 75 | 20 |
| t _f | Output pulse fall time | K[= 10 lvls2, | CL = 10 pr | | 15 | 60 | ns |
| fmax | Maximum frequency in astable mode | $R_A = 470 \Omega,$ $C_T = 200 pF,$ | $R_B = 200 \Omega$, See Note 3 | 1.2 | 2.1 | | MHz |

[†] Timing interval error is defined as the difference between the measured value and the average value of a random sample from each process run.

NOTE 3: R_A , R_B , and C_T are as defined in Figure 3.



TYPICAL CHARACTERISTICS


DISCHARGE SWITCH ON-STATE RESISTANCE

FREE-AIR TEMPERATURE 100 70 $V_{DD} = 2 \text{ V, I}_{O} = 1 \text{ mA}$ Discharge Switch On-State Resistance – 40 $V_{DD} = 5 \text{ V, } I_{O} = 10 \text{ mA}$ 20 $V_{DD} = 15 \text{ V}, I_{O} = 100 \text{ mA}$ 10 7 4 2 -75 -50 -25 25 75 100 T_A - Free-Air Temperature - °C

Figure 1

PROPAGATION DELAY TIMES (TO DISCHARGE OUTPUT FROM TRIGGER AND THRESHOLD SHORTED TOGETHER)

vs SUPPLY VOLTAGE



[‡]The effects of the load resistance on these values must be taken into account separately.

Figure 2



APPLICATION INFORMATION

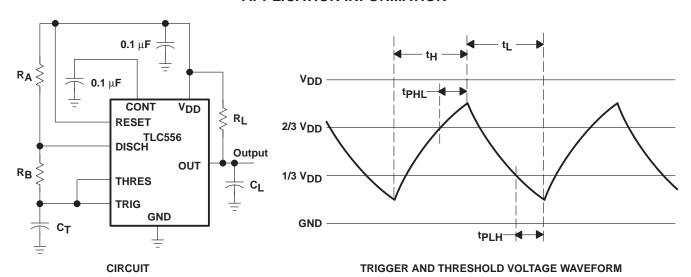


Figure 3. Astable Operation

Connecting the trigger input to the threshold input, as shown in Figure 3, causes the timer to run as a multivibrator. The capacitor C_T charges through R_A and R_B to the threshold voltage level (approximately 0.67 V_{DD}) and then discharges through R_B only to the value of the trigger voltage level (approximately 0.33 V_{DD}). The output is high during the charging cycle (t_H) and low during the discharge cycle (t_L). The duty cycle is controlled by the values of R_A , and R_B , and C_T , as shown in the equations below.

$$\begin{array}{l} t_{H} \approx C_{T} \; (R_{A} \; + \; R_{B}) \; \text{In 2} \quad (\text{In 2} = 0.693) \\ \\ t_{L} \approx C_{T} \; R_{B} \; \text{In 2} \\ \\ \text{Period} \; = \; t_{H} \; + \; t_{L} \approx C_{T} \; (R_{A} \; + \; 2R_{B}) \; \text{In 2} \\ \\ \text{Output driver duty cycle} \; = \; \frac{t_{L}}{t_{H} \; + \; t_{L}} \; \approx \; 1 \; - \; \frac{R_{B}}{R_{A} \; + \; 2R_{B}} \\ \\ \text{Output waveform duty cycle} \; = \; \frac{t_{H}}{t_{H} \; + \; t_{L}} \; \approx \; \frac{R_{B}}{R_{A} \; + \; 2R_{B}} \end{array}$$

The 0.1-μF capacitor at CONT in Figure 3 decreases the period by about 10%.

The formulas shown above do not allow for any propagation delay from the trigger and threshold inputs to the discharge output. These delay times add directly to the period and create differences between calculated and actual values that increase with frequency. In addition, the discharge output resistance r_{on} adds to R_B to provide another source of error in the calculation when R_B is very low or r_{on} is very high.

The equations below provide better agreement with measured values.

$$t_{H} = C_{T} (R_{A} + R_{B}) \text{ In } \left[3 - \exp\left(\frac{-t_{PLH}}{C_{T} (R_{B} + r_{on})}\right) \right] + t_{PHL}$$

$$t_{L} = C_{T} (R_{B} + r_{on}) \text{ In } \left[3 - \exp\left(\frac{-t_{PHL}}{C_{T} (R_{A} + R_{B})}\right) \right] + t_{PLH}$$



APPLICATION INFORMATION

The preceding equations and those given earlier are similar in that a time constant is multiplied by the logarithm of a number or function. The limit values of the logarithmic terms must be between In 2 at low frequencies and In 3 at extremely high frequencies. For a duty cycle close to 50%, an appropriate constant for the logarithmic

terms can be substituted with good results. Duty cycles less than 50% $\frac{t_H}{t_H + t_L}$ will require that $\frac{t_H}{t_L}$ <1 and

possibly $R_A \le r_{on}$. These conditions can be difficult to obtain.

In monostable applications, the trip point of the trigger input can be set by a voltage applied to CONT. An input voltage between 10% and 80% of the supply voltage from a resistor divider with at least 500- μ A bias provides good results.





www.ti.com 10-Jun-2022

PACKAGING INFORMATION

| Orderable Device | Status | Package Type | Package Drawing | Pins | Package Qty | Eco Plan | Lead finish/ Ball material | MSL Peak Temp | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|--------|--------------|--------------------|------|----------------|---------------------|-------------------------------|--------------------|--------------|----------------------------------|---------|
| 5962-89503022A | ACTIVE | LCCC | FK | 20 | 1 | Non-RoHS & Green | SNPB | N / A for Pkg Type | -55 to 125 | 5962- 89503022A TLC556MFKB | Samples |
| 5962-8950302CA | ACTIVE | CDIP | J | 14 | 1 | Non-RoHS & Green | SNPB | N / A for Pkg Type | -55 to 125 | 5962-8950302CA TLC556MJB | Samples |
| TLC556CD | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | 0 to 70 | TLC556C | Samples |
| TLC556CDG4 | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | 0 to 70 | TLC556C | Samples |
| TLC556CDR | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | | TLC556C | Samples |
| TLC556CDRG4 | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | | TLC556C | Samples |
| TLC556CN | ACTIVE | PDIP | N | 14 | 25 | RoHS & Green | NIPDAU | N / A for Pkg Type | | TLC556CN | Samples |
| TLC556ID | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | | TLC556I | Samples |
| TLC556IDG4 | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | | TLC556I | Samples |
| TLC556IDR | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | TLC556I | Samples |
| TLC556IDRG4 | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | TLC556I | Samples |
| TLC556IN | ACTIVE | PDIP | N | 14 | 25 | RoHS & Green | NIPDAU | N / A for Pkg Type | | TLC556IN | Samples |
| TLC556MD | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -55 to 125 | TLC556M | Samples |
| TLC556MDG4 | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | | TLC556M | Samples |
| TLC556MDR | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -55 to 125 | TLC556M | Samples |
| TLC556MFKB | ACTIVE | LCCC | FK | 20 | 1 | Non-RoHS & Green | SNPB | N / A for Pkg Type | -55 to 125 | 5962- 89503022A TLC556MFKB | Samples |
| TLC556MJ | ACTIVE | CDIP | J | 14 | 1 | Non-RoHS & Green | SNPB | N / A for Pkg Type | -55 to 125 | TLC556MJ | Samples |
| TLC556MJB | ACTIVE | CDIP | J | 14 | 1 | Non-RoHS & Green | SNPB | N / A for Pkg Type | -55 to 125 | 5962-8950302CA TLC556MJB | Samples |

PACKAGE OPTION ADDENDUM

www.ti.com 10-Jun-2022

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TLC556. TLC556M:

Catalog: TLC556

Military: TLC556M

NOTE: Qualified Version Definitions:



PACKAGE OPTION ADDENDUM

www.ti.com 10-Jun-2022

- Catalog TI's standard catalog product
- Military QML certified for Military and Defense Applications

www.ti.com 5-Jan-2022


TAPE AND REEL INFORMATION





| Α0 | Dimension designed to accommodate the component width |
|----|---|
| | Dimension designed to accommodate the component length |
| | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| 7 til diritoriolorio aro mominar | | | | | | | | | | | | |
|----------------------------------|-----------------|--------------------|----|------|--------------------------|--------------------------|------------|------------|------------|------------|-----------|------------------|
| Device | Package Type | Package Drawing | | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
| TLC556CDR | SOIC | D | 14 | 2500 | 330.0 | 16.4 | 6.5 | 9.0 | 2.1 | 8.0 | 16.0 | Q1 |
| TLC556IDR | SOIC | D | 14 | 2500 | 330.0 | 16.4 | 6.5 | 9.0 | 2.1 | 8.0 | 16.0 | Q1 |

www.ti.com 5-Jan-2022

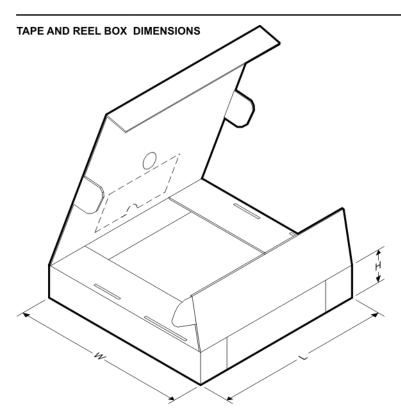


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-----------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLC556CDR | SOIC | D | 14 | 2500 | 340.5 | 336.1 | 32.0 |
| TLC556IDR | SOIC | D | 14 | 2500 | 350.0 | 350.0 | 43.0 |



www.ti.com 5-Jan-2022

TUBE

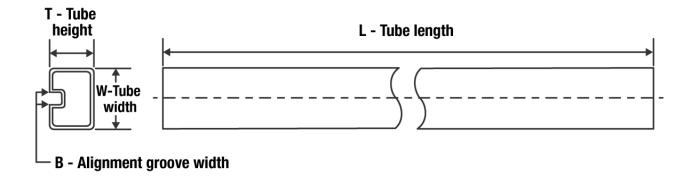

*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (µm) | B (mm) |
|----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| 5962-89503022A | FK | LCCC | 20 | 1 | 506.98 | 12.06 | 2030 | NA |
| TLC556CD | D | SOIC | 14 | 50 | 505.46 | 6.76 | 3810 | 4 |
| TLC556CD | D | SOIC | 14 | 50 | 507 | 8 | 3940 | 4.32 |
| TLC556CDG4 | D | SOIC | 14 | 50 | 507 | 8 | 3940 | 4.32 |
| TLC556CDG4 | D | SOIC | 14 | 50 | 505.46 | 6.76 | 3810 | 4 |
| TLC556CN | N | PDIP | 14 | 25 | 506 | 13.97 | 11230 | 4.32 |
| TLC556ID | D | SOIC | 14 | 50 | 505.46 | 6.76 | 3810 | 4 |
| TLC556IDG4 | D | SOIC | 14 | 50 | 505.46 | 6.76 | 3810 | 4 |
| TLC556IN | N | PDIP | 14 | 25 | 506 | 13.97 | 11230 | 4.32 |
| TLC556MD | D | SOIC | 14 | 50 | 505.46 | 6.76 | 3810 | 4 |
| TLC556MDG4 | D | SOIC | 14 | 50 | 505.46 | 6.76 | 3810 | 4 |
| TLC556MFKB | FK | LCCC | 20 | 1 | 506.98 | 12.06 | 2030 | NA |

CERAMIC DUAL IN LINE PACKAGE



Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4040083-5/G





CERAMIC DUAL IN LINE PACKAGE



- 1. All controlling linear dimensions are in inches. Dimensions in brackets are in millimeters. Any dimension in brackets or parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This package is hermitically sealed with a ceramic lid using glass frit.
- His package is remitted by sealed with a ceramic its using glass mit.
 Index point is provided on cap for terminal identification only and on press ceramic glass frit seal only.
 Falls within MIL-STD-1835 and GDIP1-T14.



CERAMIC DUAL IN LINE PACKAGE



D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.



D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2023, Texas Instruments Incorporated